

LF5-SM311G-20AI

1.25G 2X5 SFF Transceiver Module

Product Features

- VCSEL/FP/DFB Laser Diode Transmitter
- Up to 20 Km on 9/125μm SMF
- 3.3V power supply
- LC duplex optical interface
- LVPECL Differential Inputs and LVPECL Differential Outputs and LVPECL signal detect
- Class 1 Laser International Safety Standard IEC 825 Compliant
- Operating case temperature range
Standard: 0°C to +70°C
Industrial: -40°C to +85°C

Application

- 1000Mbps Ethernet
- Fiber Channel Switch Infrastructure
- Gigabit Ethernet Switches and Routers
- Other optic link



Product Description

LINK-PP's LF5-xMxx1G-xxAI series of transceiver modules are the perfect solution for low-speed communication networks.

These transceiver modules support data rates up to 1.5Gbps. The module is fully compliant with the 2X5 standard package defined by the Small Form Factor Multi-Sourcing Agreement (MSA).

These transceiver modules provide the system designer with Telecom, Datacom, and other Fibre Channel applications.

Absolute Maximum Ratings

Operating of the transceiver beyond the Absolute Conditions Listed in Table 1 will degrade or damage the product. It's not implied that the product would function above the recommended operating environment, it's possible to reduce the reliability and lifetime of device if Recommended Operating Environment is exceeded (Refer to table 2)

Table 1--- Absolute Maximum Conditions

Parameter	Symbol	Min	Max	Units	Note
Storage Temperature	T _{ST}	-40	+85	°C	-
Relative Humidity	RH	5	95	%	-
Supply Voltage	V _{CC}	0	+3.6	V	-

Table 2--- Recommended Operating Environment and Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Units	Note
Supply Voltage	V _{CC}	+3.1	+3.3	+3.5	V	-
Supply Current	I _{CC}	-	-	260	mA	-
Operating Case Temperature	T _{OP}	0	-	+70	°C	1
		-40	-	+85		2
Data Rate	B	100	1250	1500	Mbps	-
Soldering temperature	-	-	-	350	°C	3
Soldering duration	-	-	-	10	Sec	3

Note 1.standard level
2.industrial level
3.Not recommended wave soldering.

Optical Parameters

Table 3---LF5-SM311G-20AI Transceiver Optical Characteristics
(Ambient Operating Temperature Ta=+25±5°C, VCC = 3.3±0.2V)

Parameter	Symbol	Min	Typ	Max	Units	Note
Transmitter						
Data rate	B	100	1250	1500	Mbps	-
Output Center Wavelength	λ_c	1260	1310	1360	nm	-
Output Spectral width (RMS)	λ	-	-	4	nm	-
Average Optical Output Power	P _o	-10	-	-3	dBm	1,2
Extinction Ratio	ER	8.2	-	-	dB	1,2
Optic Output Eye: Compliant with Bellcore TR-NWT-000253 and ITU recommendation G.957						1,2
Receiver						
Receiver Sensitivity	P _{min}	-	-	-23	dBm	1,2
Receiver Saturation	P _{max}	-3	-	-	dBm	1,2
Operation Center Wavelength	λ_c	1260	-	1620	nm	-
SD	Deassert	PD	-35	-	dBm	1,2
	Assert	PA	-	-23	dBm	1,2
SD Hysteresis	SDHYS	0.5	-	-	dB	-

Note1: The optical power is launched into 9/125μm SMF.

Note2: With a PRBS 2²³-1 test pattern@ 155Mbps.

Electrical Parameters

Table 4--- Transceiver Electrical Characteristics
(Ambient Operating Temperature Ta=+25±5°C, VCC = 3.3±0.2V)

Parameter	Symbol	Min	Typ	Max	Units	Note
Supply Voltage	V _{CC}	+3.1	+3.3	+3.5	V	-
Supply Current	I _{CC}	-	-	260	mA	-
Transmitter						
Differential Input Voltage	V _{in}	400	-	2400	mV _{p-p}	-
Input Differential Impedance	Z _{in}	90	100	110	Ω	-

Data Input Voltage - Low	V_{IL}	$V_{CC} - 1.81$	-	$V_{CC} - 1.48$	V	-
Data Input Voltage - High	V_{IH}	$V_{CC} - 1.17$	-	$V_{CC} - 0.88$	V	-
Receiver						
Differential Output Voltage	V_{OUT}	400	-	1000	mV _{p-p}	-
Data Output Voltage – Low	V_{OL}	$V_{CC} - 1.83$	-	$V_{CC} - 1.56$	V	-
Data Output Voltage – High	V_{OH}	$V_{CC} - 1.09$	-	$V_{CC} - 0.88$	V	-
SD Output Voltage-Low	V_{OL}	$V_{CC} - 2.0$	-	$V_{CC} - 1.56$	V	1
SD Output Voltage-High	V_{OH}	$V_{CC} - 1.1$	-	$V_{CC} - 0.75$	V	1

Note1: LVPECL signal detect

Pin Definitions

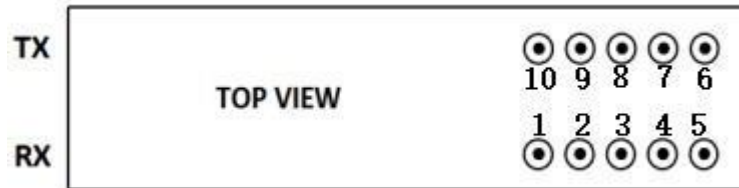


Table 5---Connector pin assignment

Pin	Pin Name	Description	Note
1	VEER	Receiver Ground	-
2	VCCR	Receiver Power Supply	-
3	SD	Signal detect output(LVPECL)	1
4	RD-	Inv. Received Data Out (LVPECL)	-
5	RD+	Received Data Out (LVPECL)	-
6	VCCT	Transmitter Power Supply	-
7	VEET	Transmitter Ground	-
8	TXDIS	Transmitter disable(LVTTL), high logical level indicates transmitter is disabled.	2,3
9	TD+	Transmit Data In (LVPECL)	-
10	TD-	Inv. Transmit Data In (LVPECL)	-


Note1: LVPECL-Normal optical input levels to the receiver result in logic "1" output, pull-down 130Ω resistor.

Note2: TX_Disable is an input that is used to shut down the transmitter optical output. Its states are:


Low (0 – 0.8V):	Transmitter on
(>0.8, < 2.0V):	Undefined
High (2.0 – VCC):	Transmitter Disabled

Note3: If not be used, PIN of TX_Disable will be set low inside the module.

Recommended Board Layout Hole Pattern

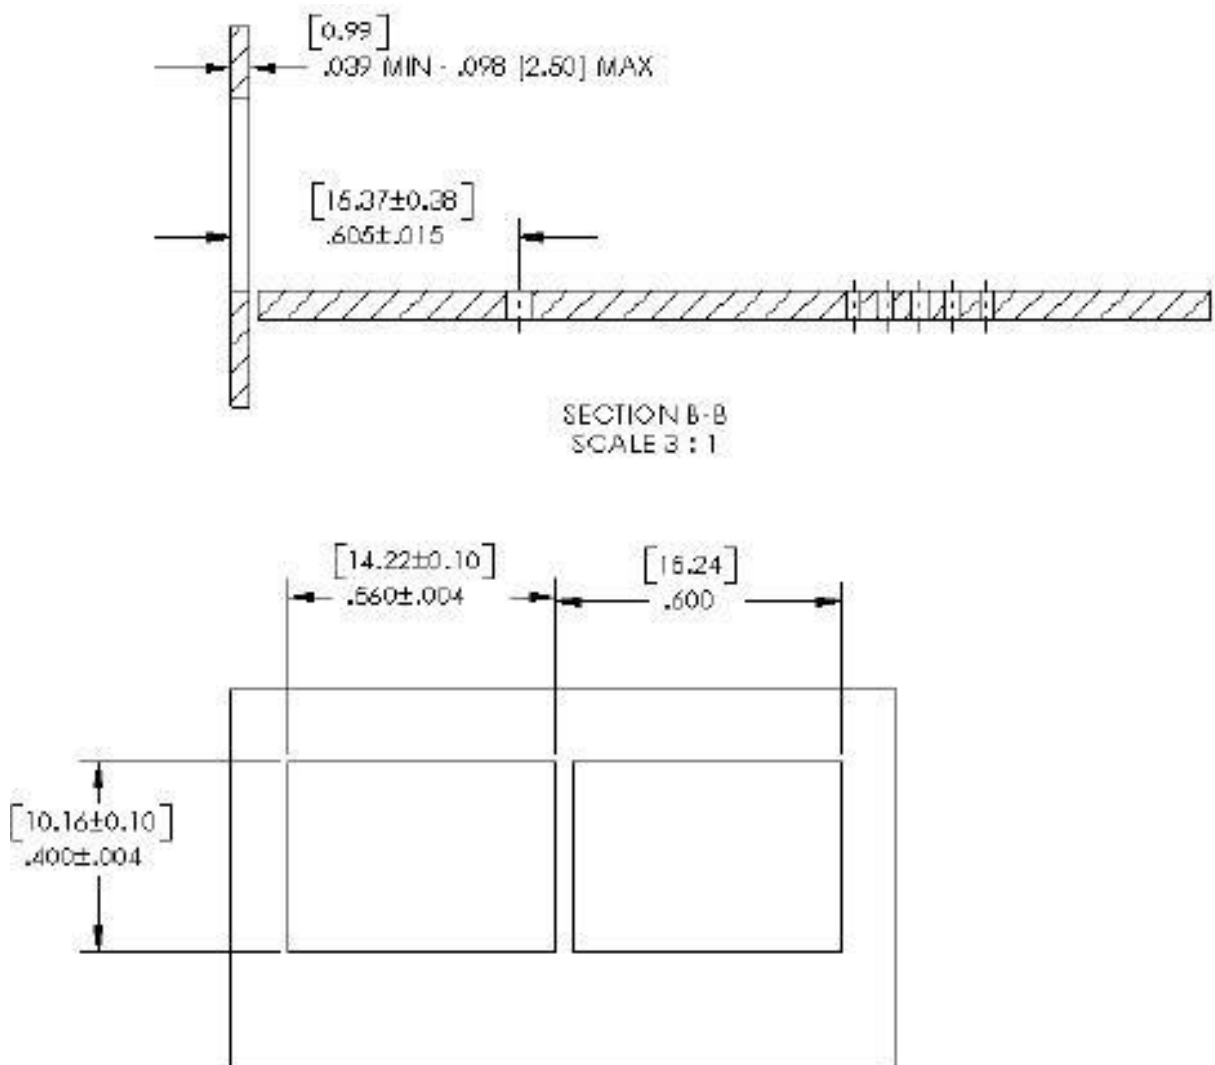


Recommended Circuit Schematic

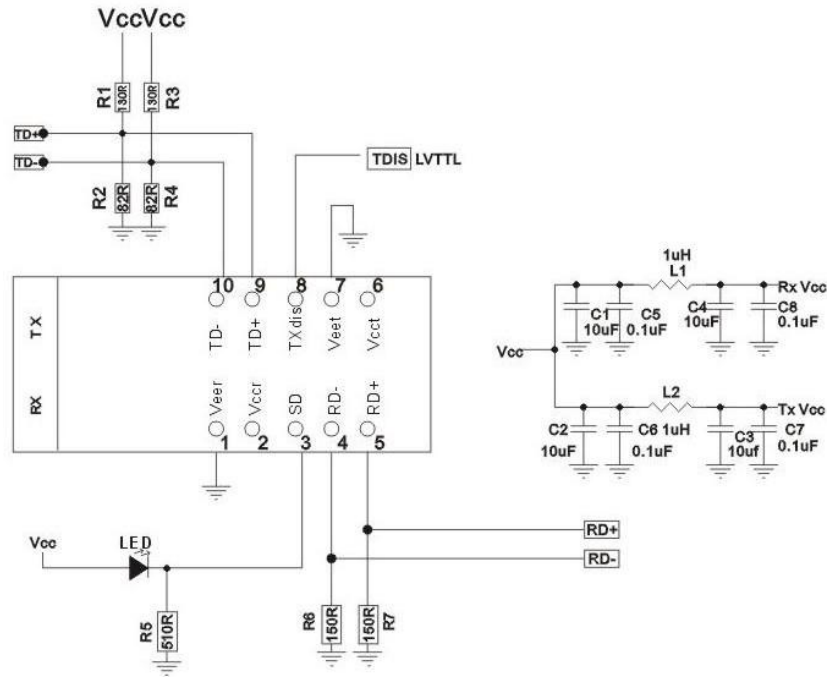

SD - LVPECL, DC Coupling

Circuit Schematic : 3.3V SD LVPECL

Module Outline Drawing (Units in mm)

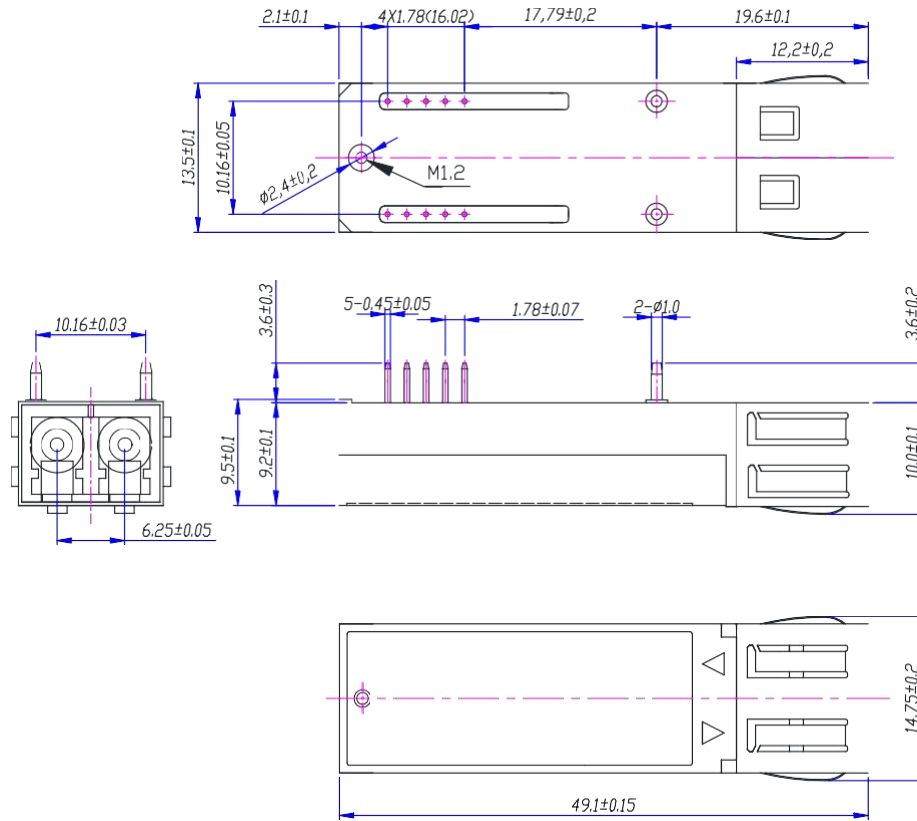

LC receptacle

Order Information

PN	Description
LF5-SM311G-20AC	SFF 2x5, SMF, 1310nm(FP), 1.25G, 20km, LVPECL signal detect, 0 ~ 70°C
LF5-SM311G-20AI	SFF 2x5, SMF, 1310nm(FP), 1.25G, 20km, LVPECL signal detect, 40 ~ 85°C
LF5-SM311G-20BC	SFF 2x5, SMF, 1310nm(FP), 1.25G, 20km, LVTTTL signal detect, 0 ~ 70°C
LF5-SM311G-20BI	SFF 2x5, SMF, 1310nm(FP), 1.25G, 20km, LVTTTL signal detect, 40 ~ 85°C