




| REV. | DESCRIPTION OF CHANGE | REVIEWED BY | ISSUE DATE |
|---|---|---|---|
| A | FIRST ISSUE | JULY | 2024-05-16 |
| | | | |

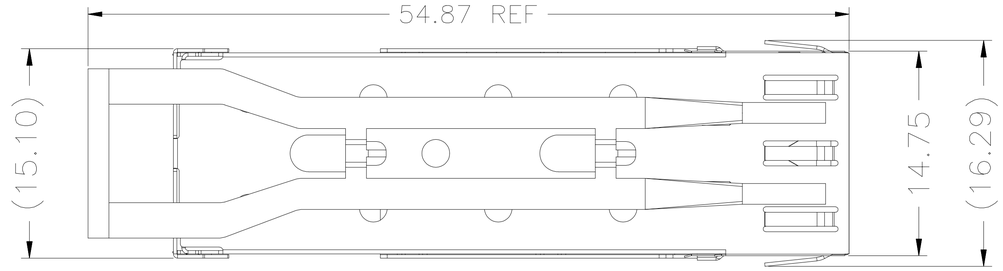

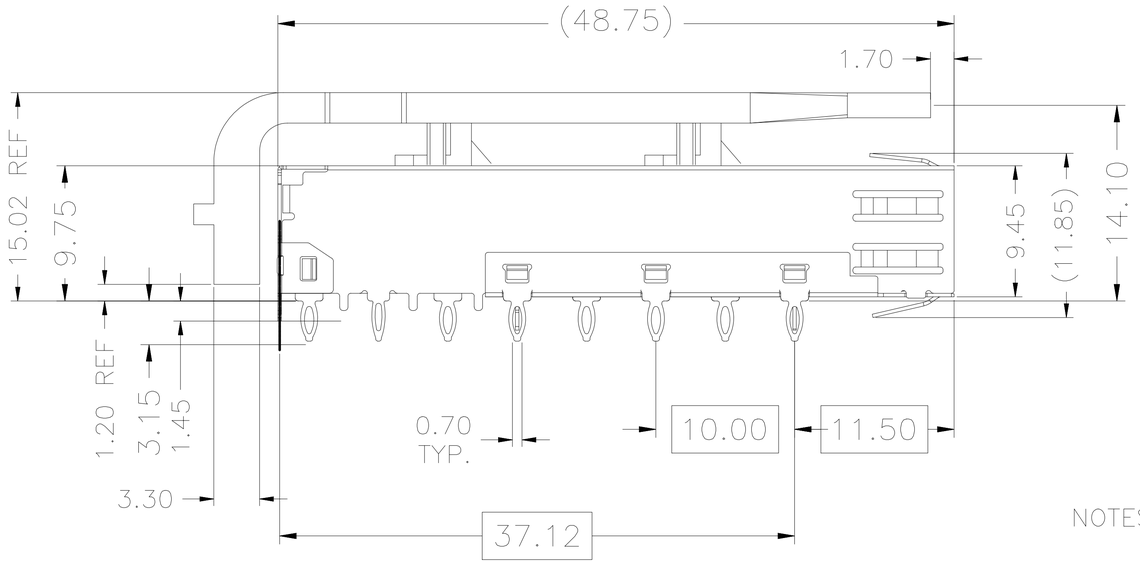

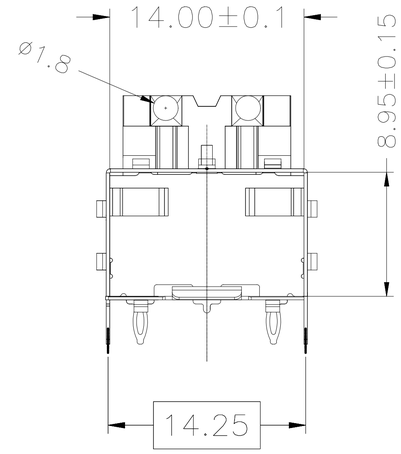


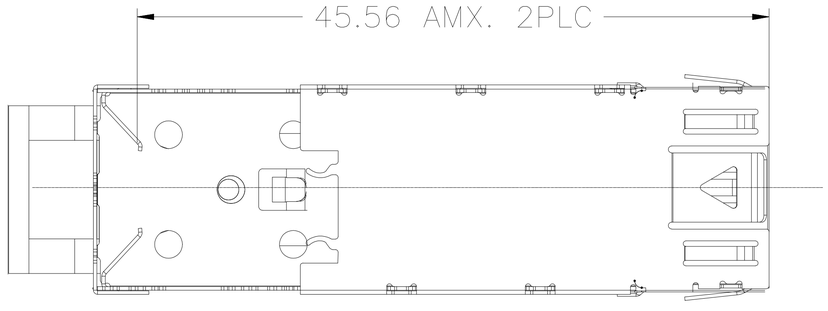

NOTES:

1.MATERIAL:
CAGE: STAINLESS STEEL, THICKNESS 0.25mm
LIGHT PIPE: CLEAR POLYCARBONATE
2.PACKAGING: TRAY PACKAGING
3.TEMPERATURE RANGE:
OPERATING : −40°C TO +85°C
NON OPERATING : −55°C TO +105°C

RoHS 2011/65/EU
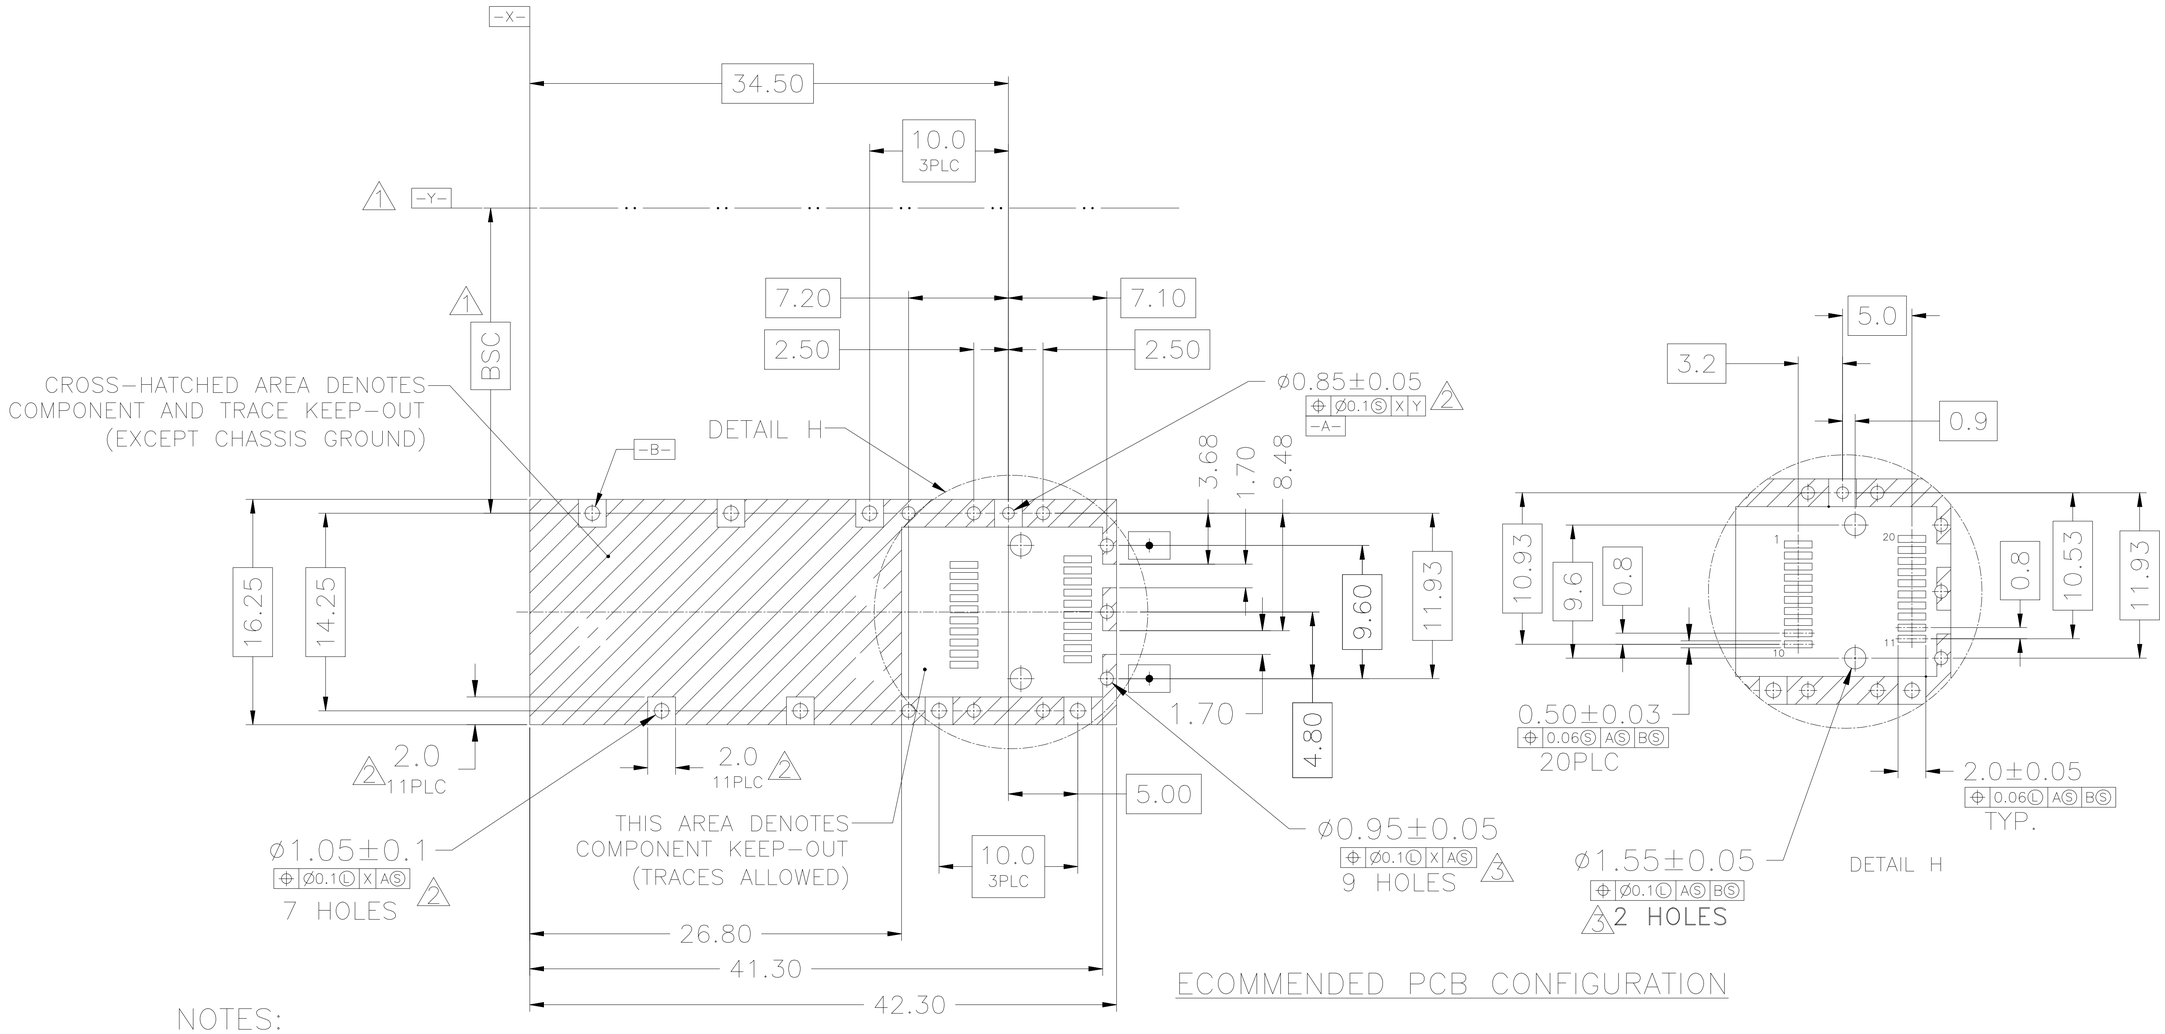
| TITLE | | | LINK-PP INT'L TECHNOLOGY CO., LIMITED | | | |
|---|---|---|---|---|---|---|
| SFP 1X1 CAGE<br>WITH EMI SPRING FINGER & WITH LIGHT PIPE | | | | | | |
| PART NO. LP11AC01300Y | | | GENNERAL TOLERANCE | | UNIT:MM | SIZE:A4 |
| APPROVE | CHECK | DRAW | .X±0.25 | .X±1° | SCALE:1:1 | SHEET:1/3 | REV:A |
| JULY | Kevin | Kevin | .XX±0.15 | .XX±5° | | | |
| | | | .XXX±0.10 | | | |





ECOMMENDED PCB CONFIGURATION

NOTES:


1. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
2. PADS AND VIAS ARE CHASSIS GROUND, 11 PLACES
3. THRU HOLES, PLATING OPTIONAL

RoHS 2011/65/EU

| | | | | | | |
|---|---|---|---|---|---|---|
| TITLE: SFP 1X1 CAGE WITH EMI SPRING FINGER & WITH LIGHT PIPE | | | LINK-PP INT'L TECHNOLOGY CO., LIMITED | | | |
| PART NO. LP11AC01300Y | | | GENNERAL TOLERANCE | | UNIT:MM | SIZE:A4 |
| APPROVE | CHECK | DRAW | .X±0.25 | .X±1° | SCALE:1:1 | SHEET:2/3 | REV:A |
| JULY | Kevin | Kevin | .XX±0.15 | .XX±5° | | | |
| | | | .XXX±0.10 | | | |

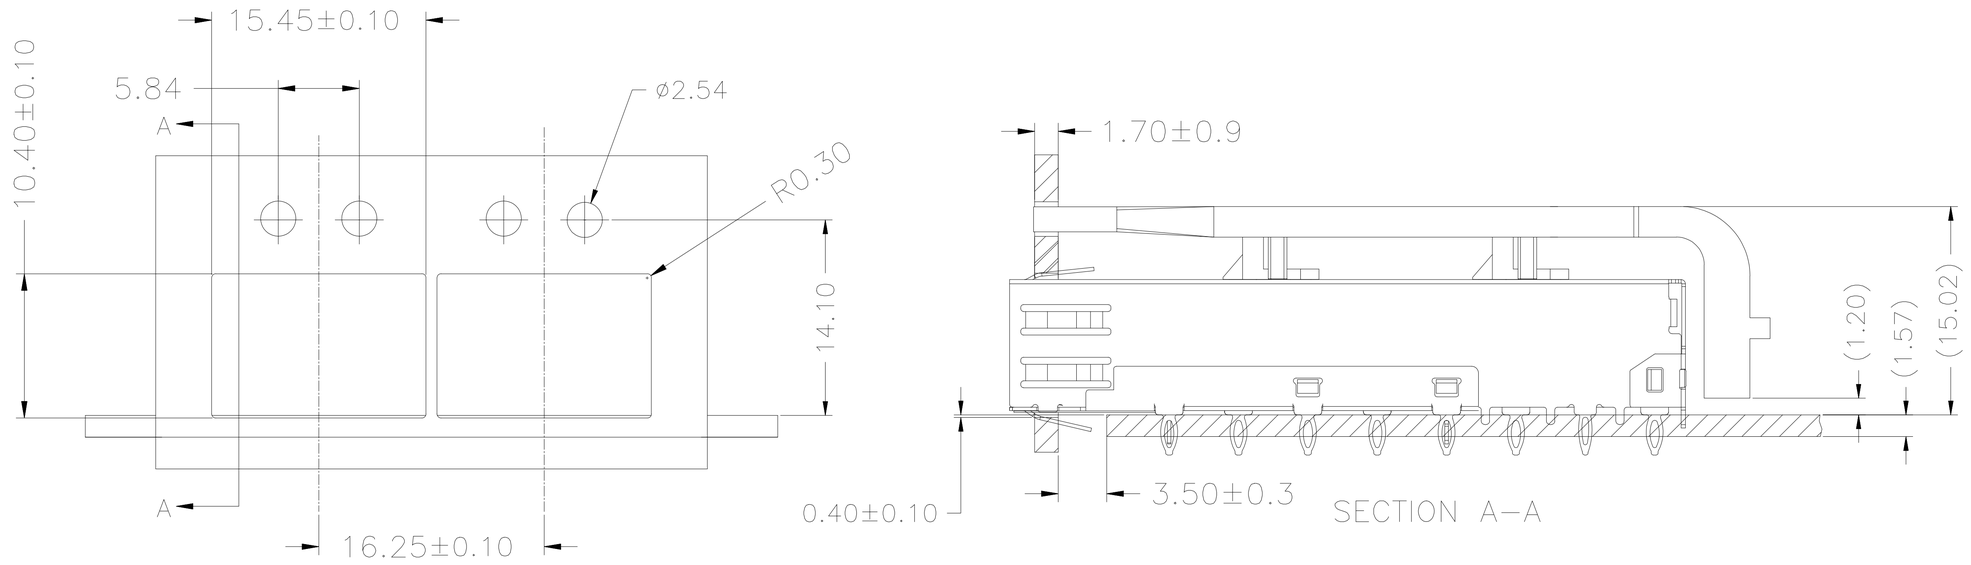


RECOMMENDED BEZEL DESIGN

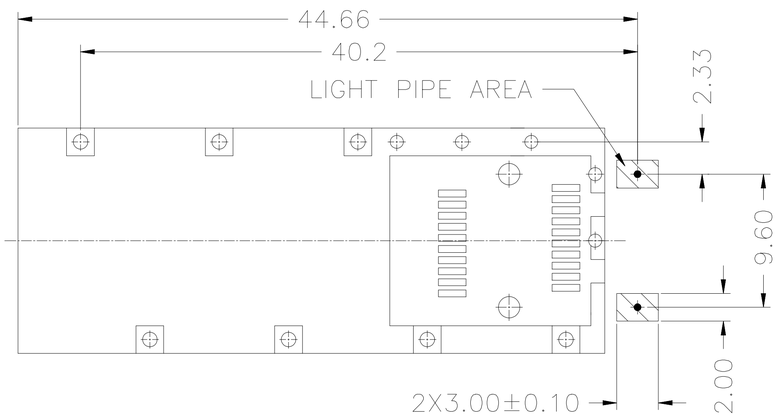


ECOMMENDED PCB CONFIGURATION

NOTES:

1. MINIMUM PITCH ILLUSTRATED, ENGLISH DIMENSIONS ARE FOR REFERENCE ONLY

RoHS 2011/65/EU

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| TITLE: SFP 1X1 CAGE WITH EMI SPRING FINGER & WITH LIGHT PIPE | | | LINK-PP INT'L TECHNOLOGY CO., LIMITED | | | | |
| PART NO. LP11AC01300Y | | | GENNERAL TOLERANCE | | | UNIT:MM | SIZE:A4 |
| APPROVE | CHECK | DRAW | .X±0.25 | .X±1° | SCALE:1:1 | SHEET:3/3 | REV:A |
| JULY | Kevin | Kevin | .XX±0.15 | .XX±5° | | | |
| | | | .XXX±0.10 | | | | |