



REV	DESCRIPTION OF CHANGE	REVIEWED BY	ISSUE DATE
A	FIRST ISSUE	LEO	2022-11-21

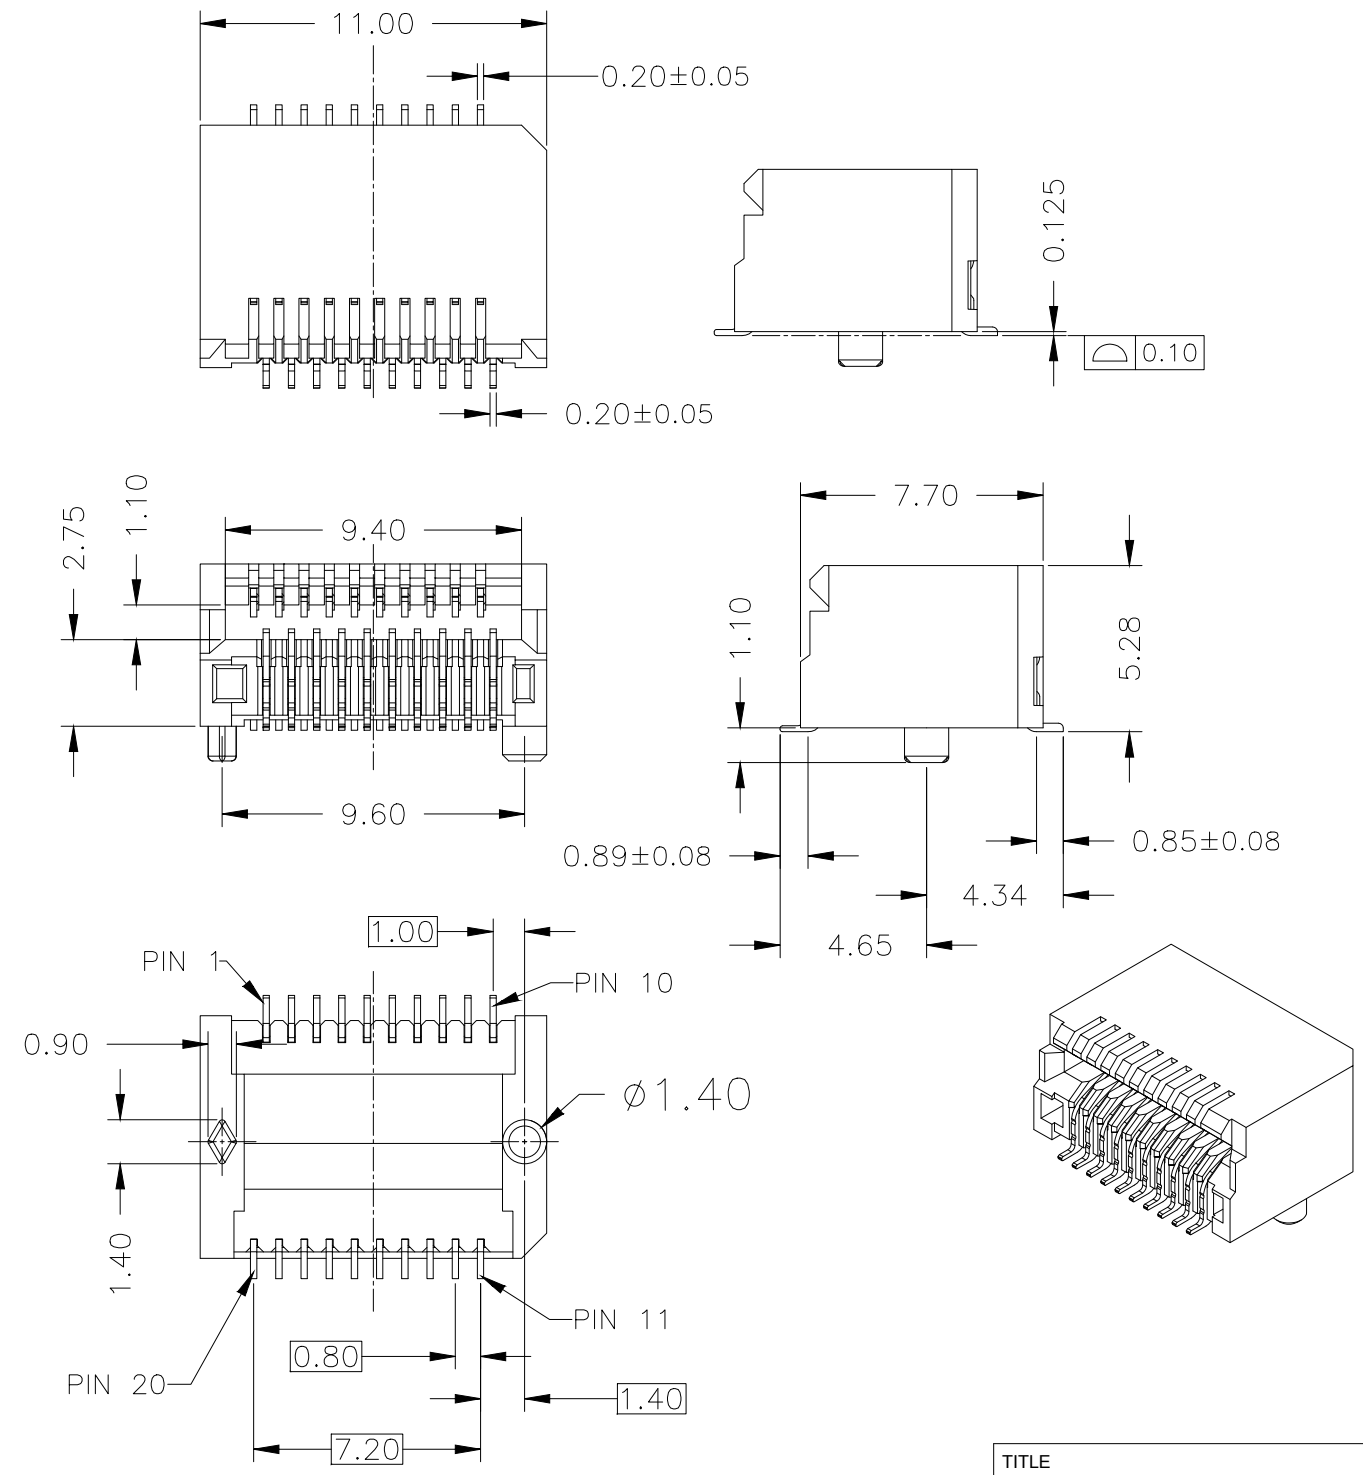



NOTES:

1. MATERIAL  
HOUSING: HIGH TEMPERATURE LCP, Black, UL94 V-0.
2. CONTACTS: PHOSPHOR BRONZE  
PLATING :15 $\mu$ " GOLD ON MATING AREA,  
GOLD FLASH PLATING ON  
SOLDER TAILS, 50 $\mu$ " NICKEL  
UNDERPLATING OVERALL.
3. MECHANICAL REQUIREMENT:  
3.1 DURABILITY:100 CYCLES NIN.  
3.2 INSERTION AND EXTRACTION FORCE:40N MAX. & 11.5N MAX.
4. ENVIRONMENTAL:  
4.1 CONTACT RESISTANCE:20 MILLIOHMS MAX INITIAL.  
4.2 DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/MIN.  
4.3 CURRENT RATING: 0.5 Amps Max.  
4.4 OPERATION: -40°C TO +95°C  
4.5 STORAGE: -55°C TO +105°C  
4.6 REFLOW SOLDERING TEMPERATURE: 255~265° MAXIMUM  
FOR 5~10 SECONDS.  
4.9 ROHS COMPLIANT
5. PACKAGING: TAPE AND REEL

TITLE			LINK-PP INT'L TECHNOLOGY CO., LIMITED		
SFP+ 1X1 CONNECTOR					
PART NO.			GENNERAL TOLERANCE		UNIT:MM
LP11B000001					SIZE:A4
APPROVE	CHECK	DRAW	SCALE:1:1	SHEET:1/3	REV:A
LEO	JAMES	JAMES			

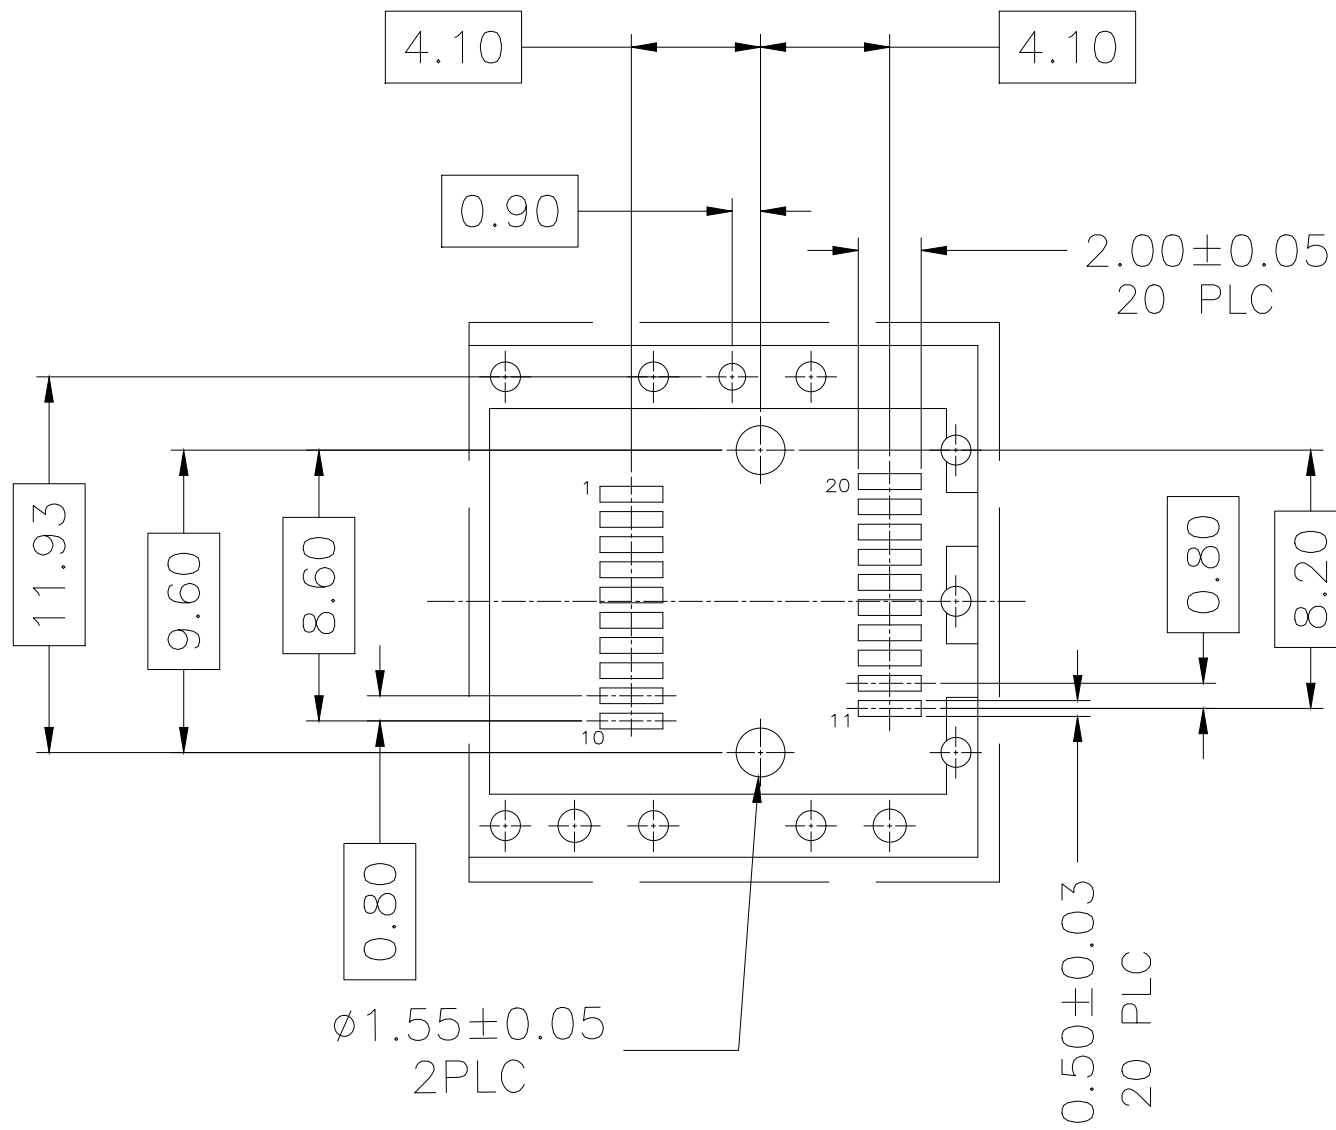

TITLE			SFP+ 1X1 CONNECTOR		LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.			LP11B000001		GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	° X±0.20	° X±1°	SCALE:1:1	SHEET:2/3	REV:A	
LEO	JAMES	JAMES	° XX±0.15	° XX±5°				
			° XXX±0.10					

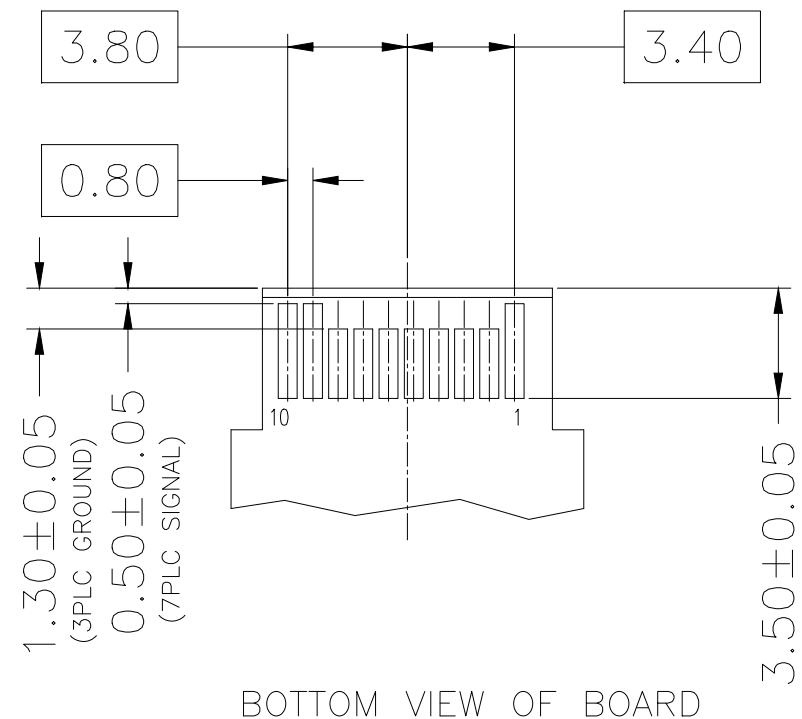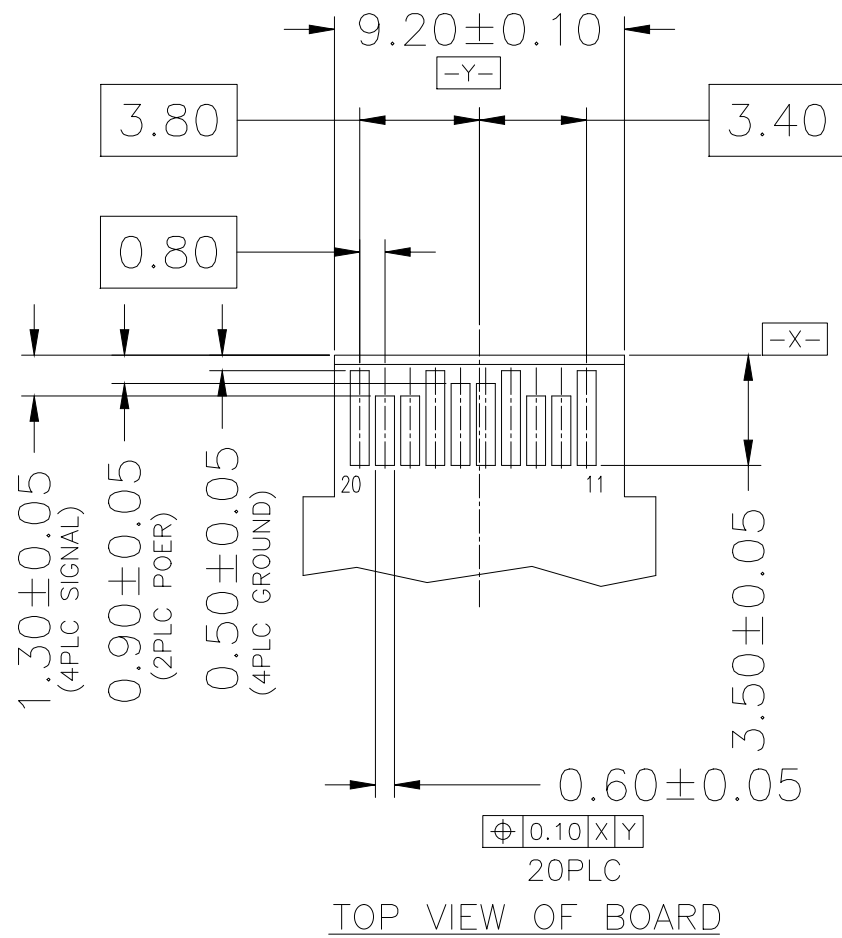

RECOMMENDED LAYOUT DETAIL MATING TRANSCEIVER PCB



TITLE			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
SFP+ 1X1 CONNECTOR						
PART NO.			GENNERAL TOLERANCE	UNIT:MM	SIZE:A4	
LP11B000001				SCALE:1:1	SHEET:3/3	
APPROVE	CHECK	DRAW				REV:A
LEO	JAMES	JAMES				