


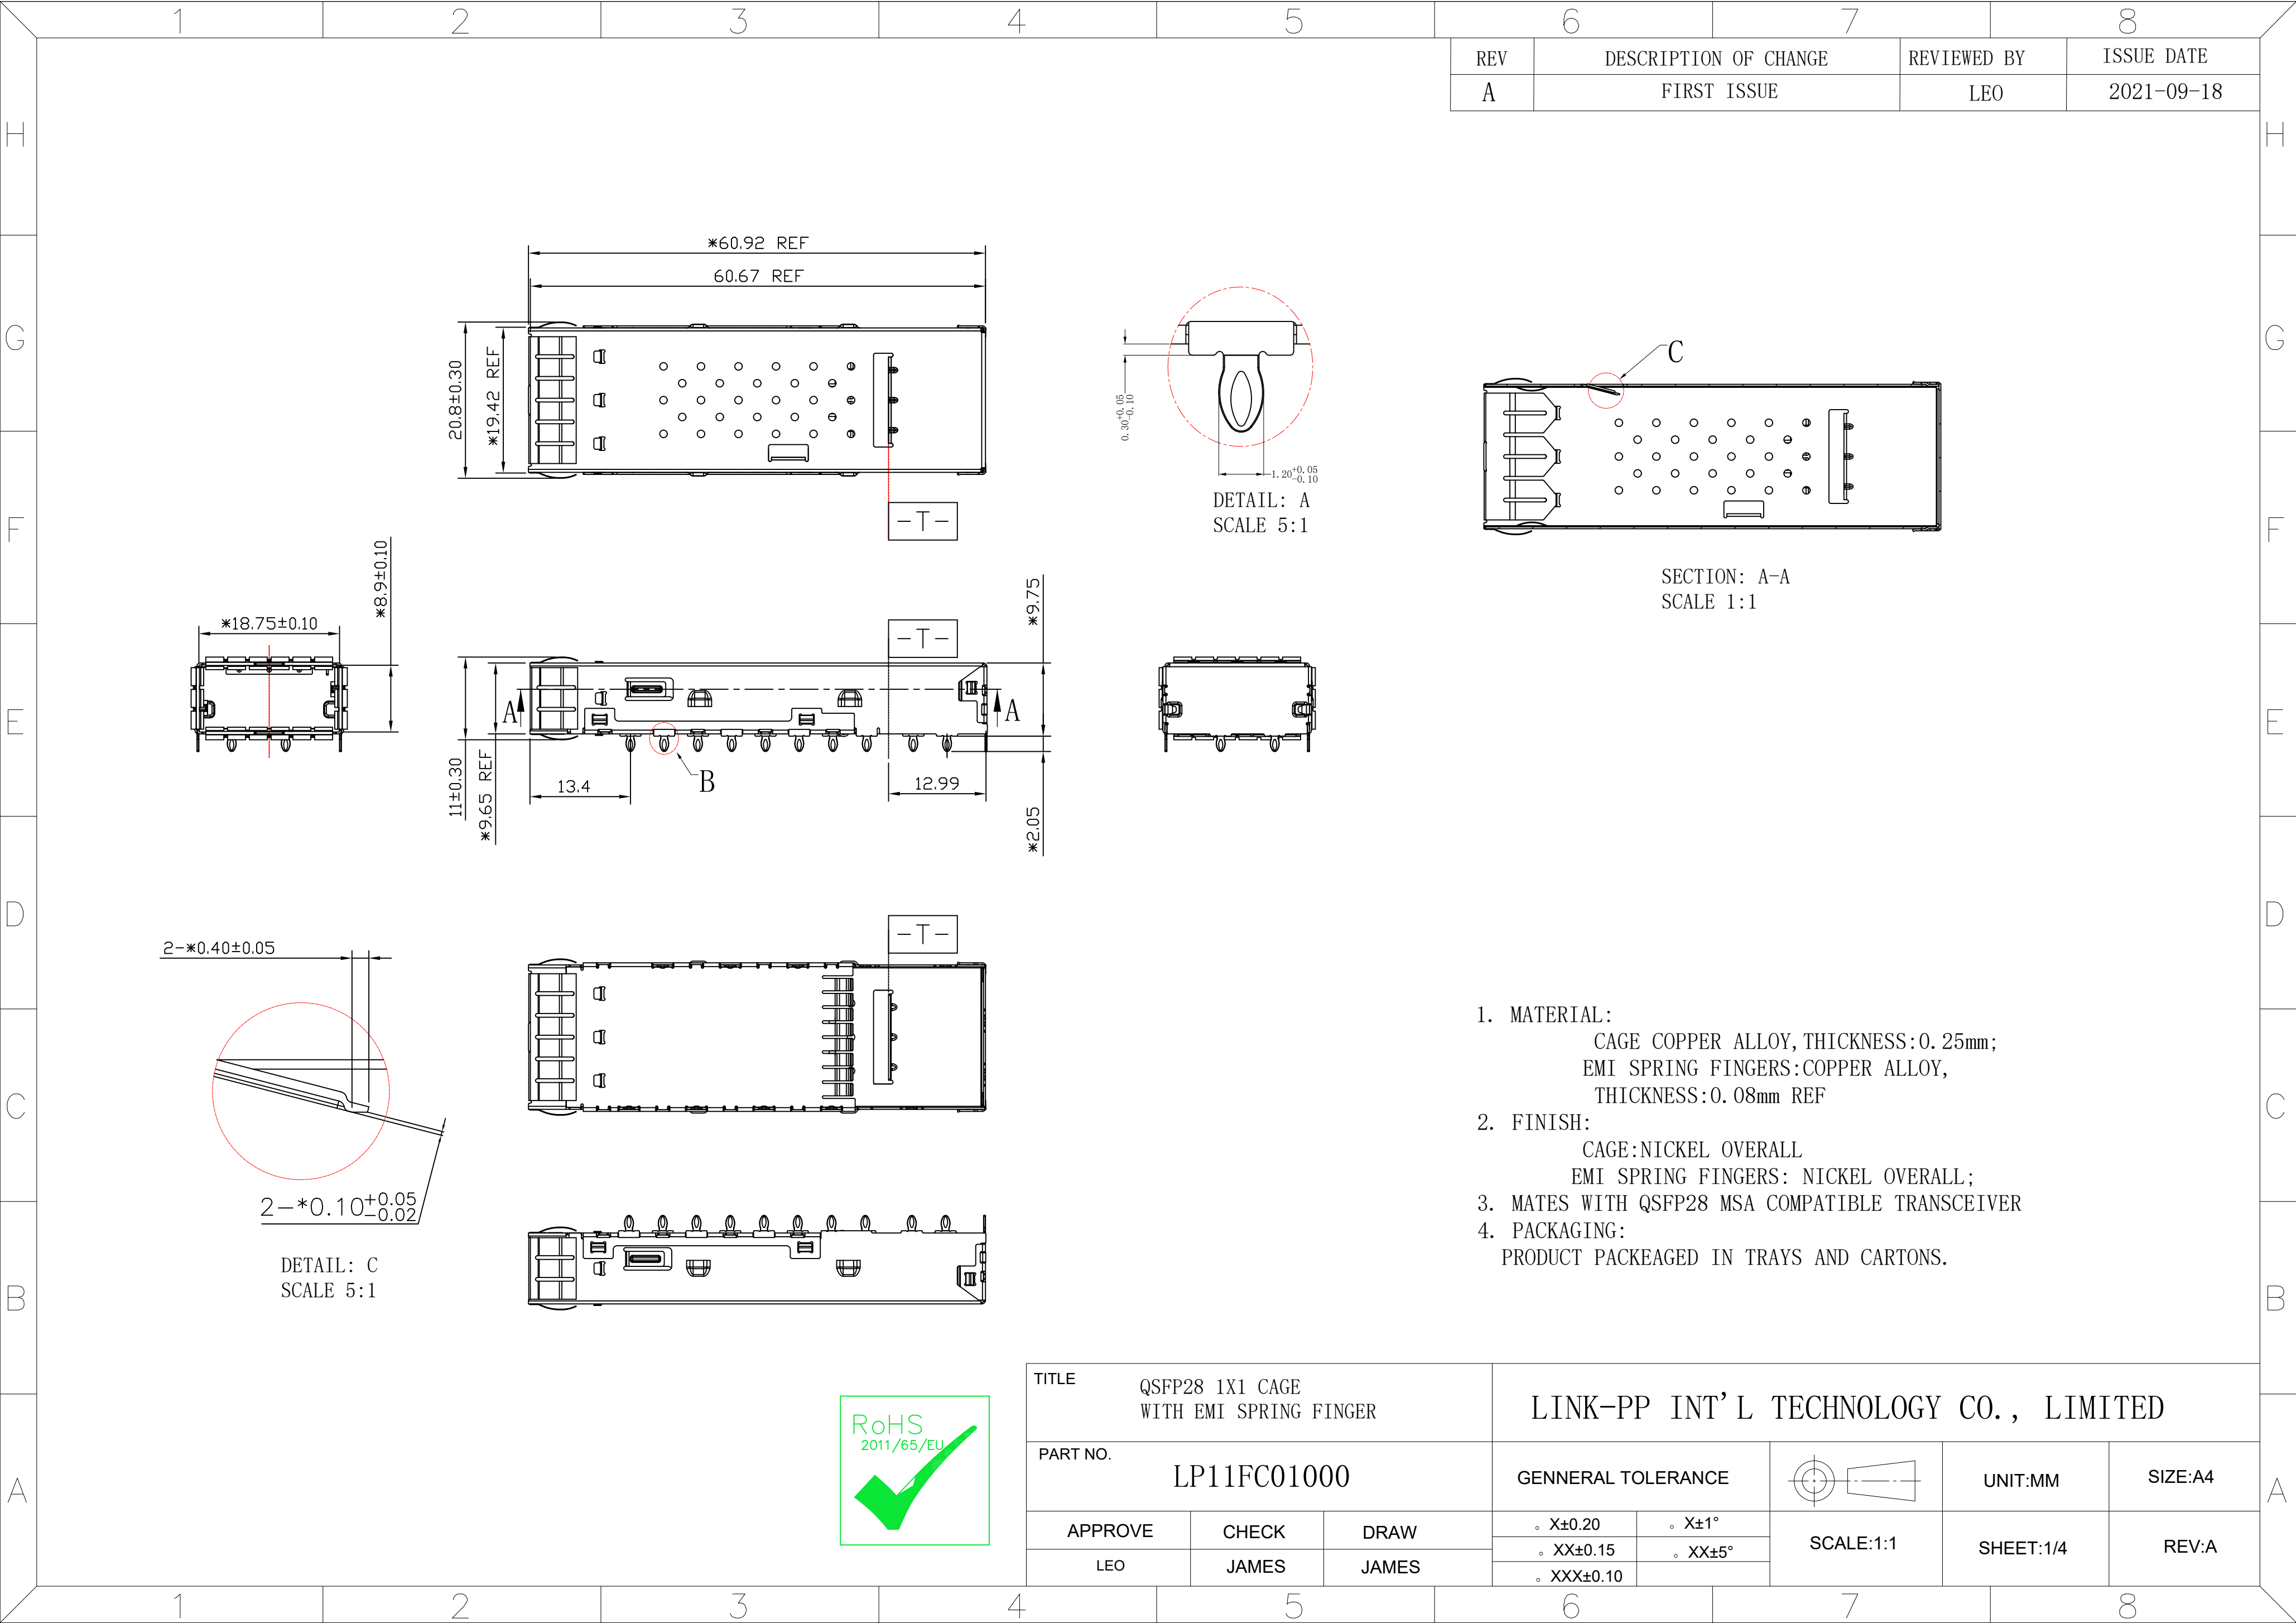
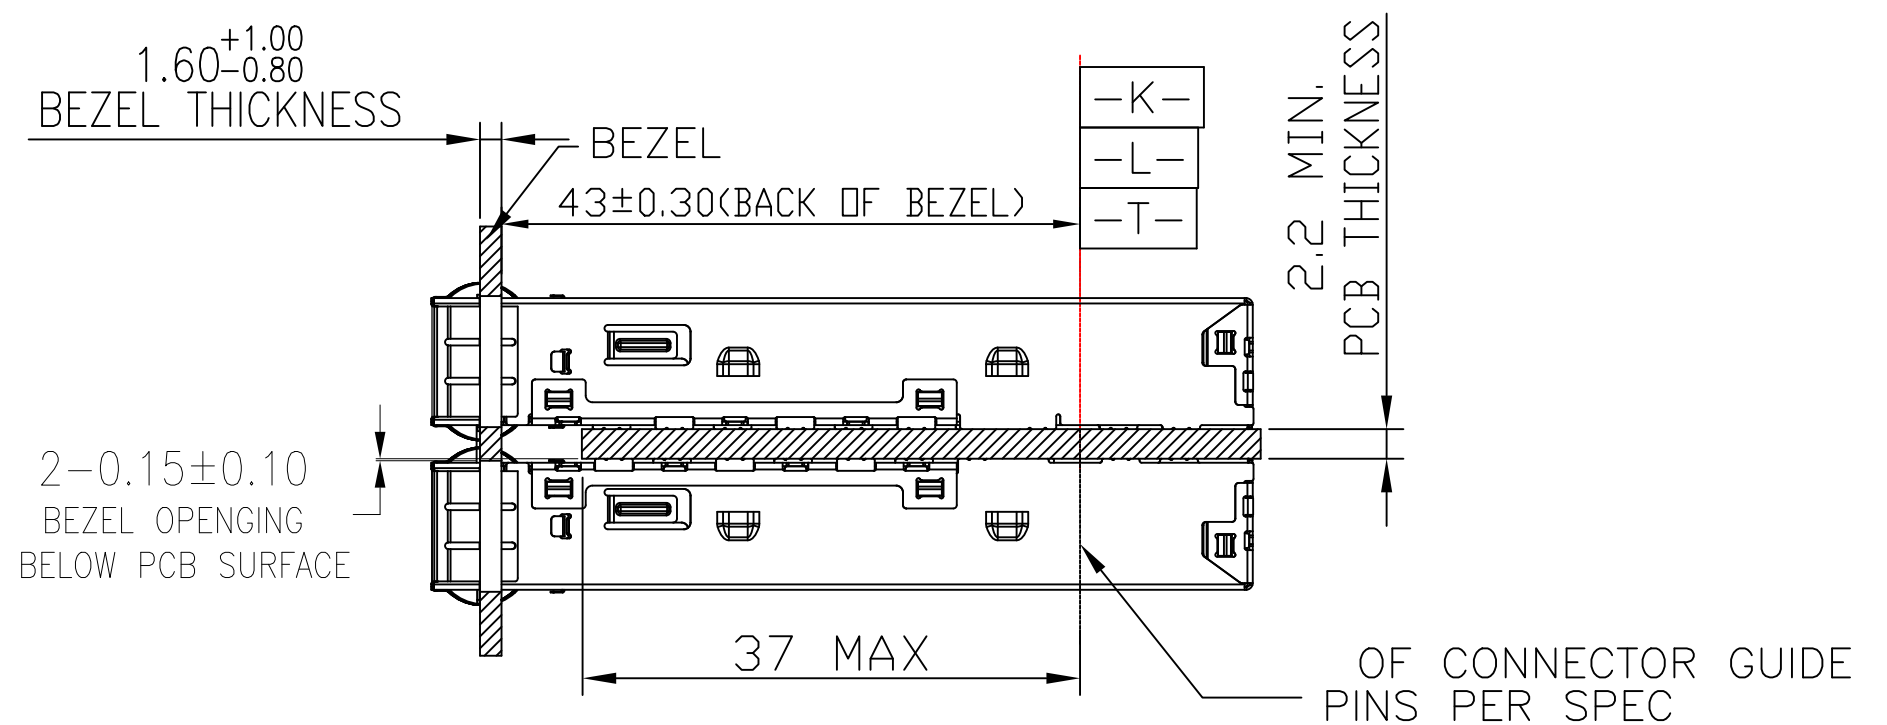
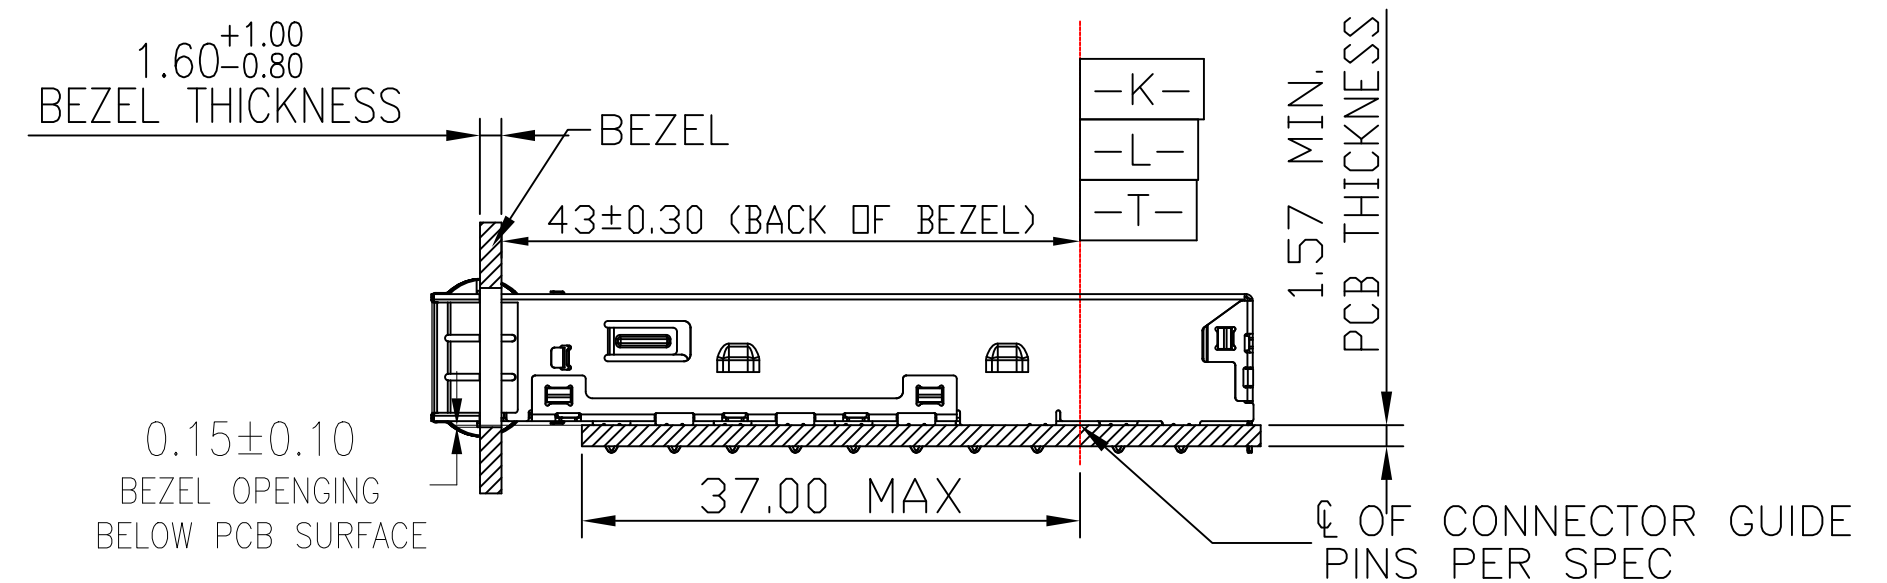


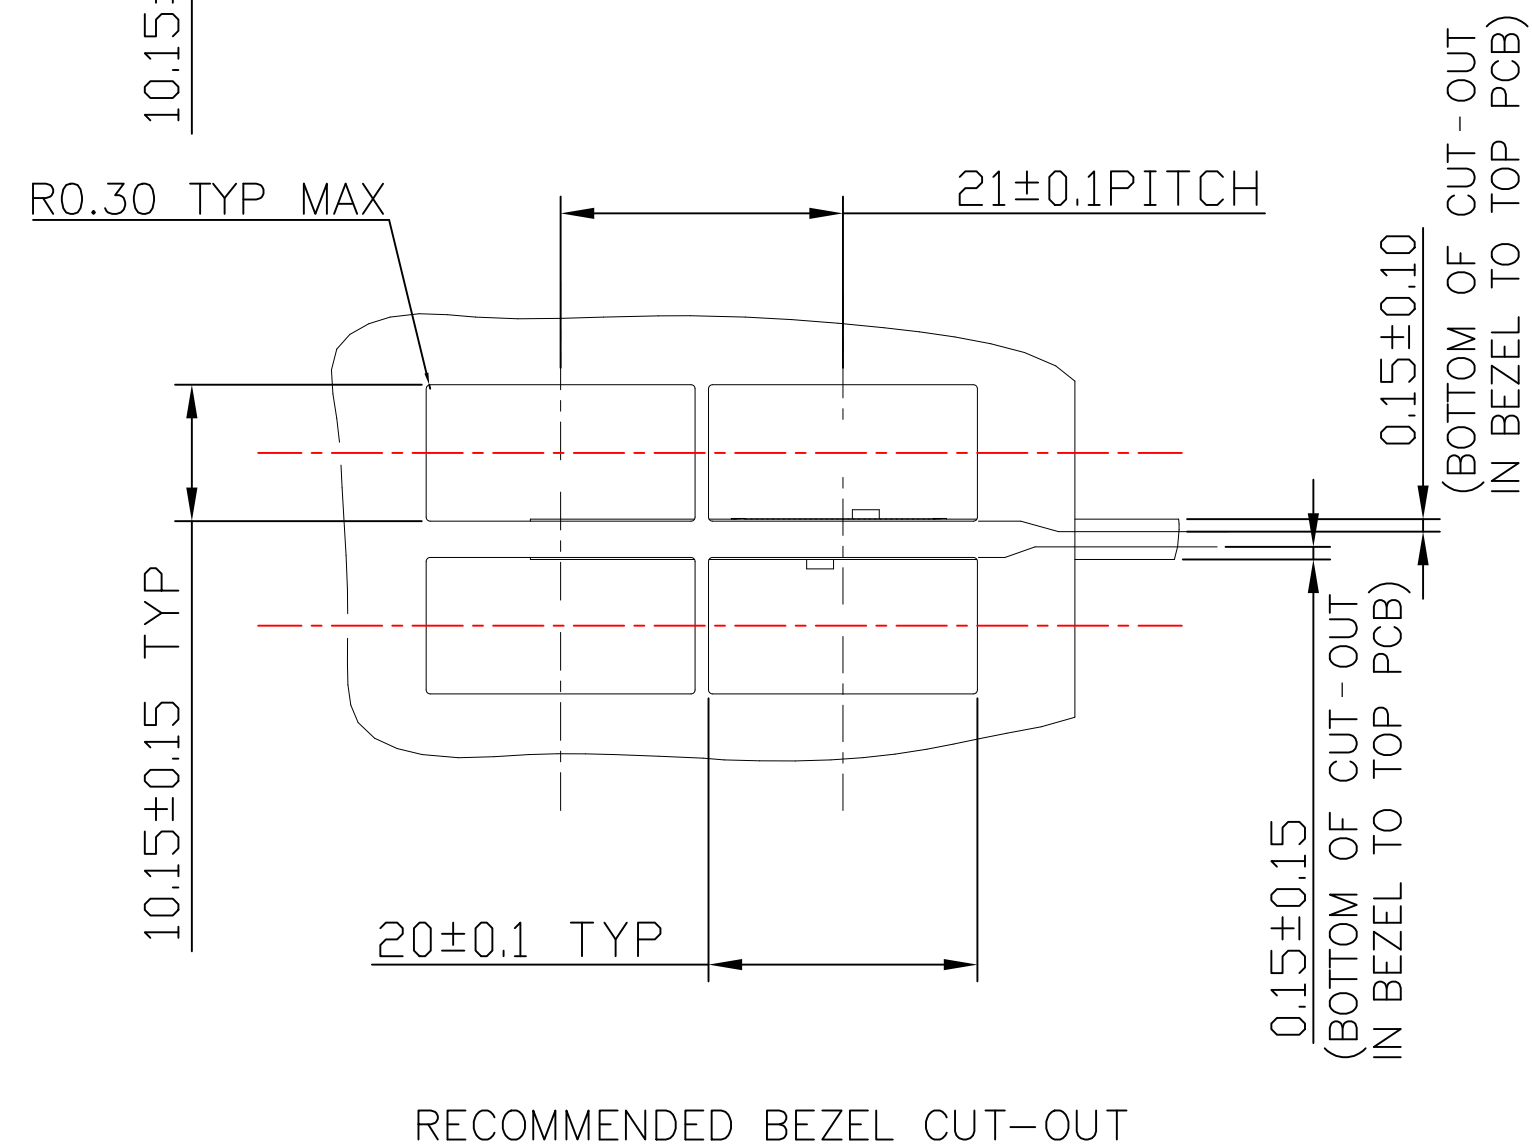

1. MATERIAL:
CAGE COPPER ALLOY, THICKNESS:0.25mm;
EMI SPRING FINGERS: COPPER ALLOY,
THICKNESS:0.08mm REF
2. FINISH:
CAGE: NICKEL OVERALL
EMI SPRING FINGERS: NICKEL OVERALL;
3. MATES WITH QSFP28 MSA COMPATIBLE TRANSCEIVER
4. PACKAGING:
PRODUCT PACKEAGED IN TRAYS AND CARTONS.

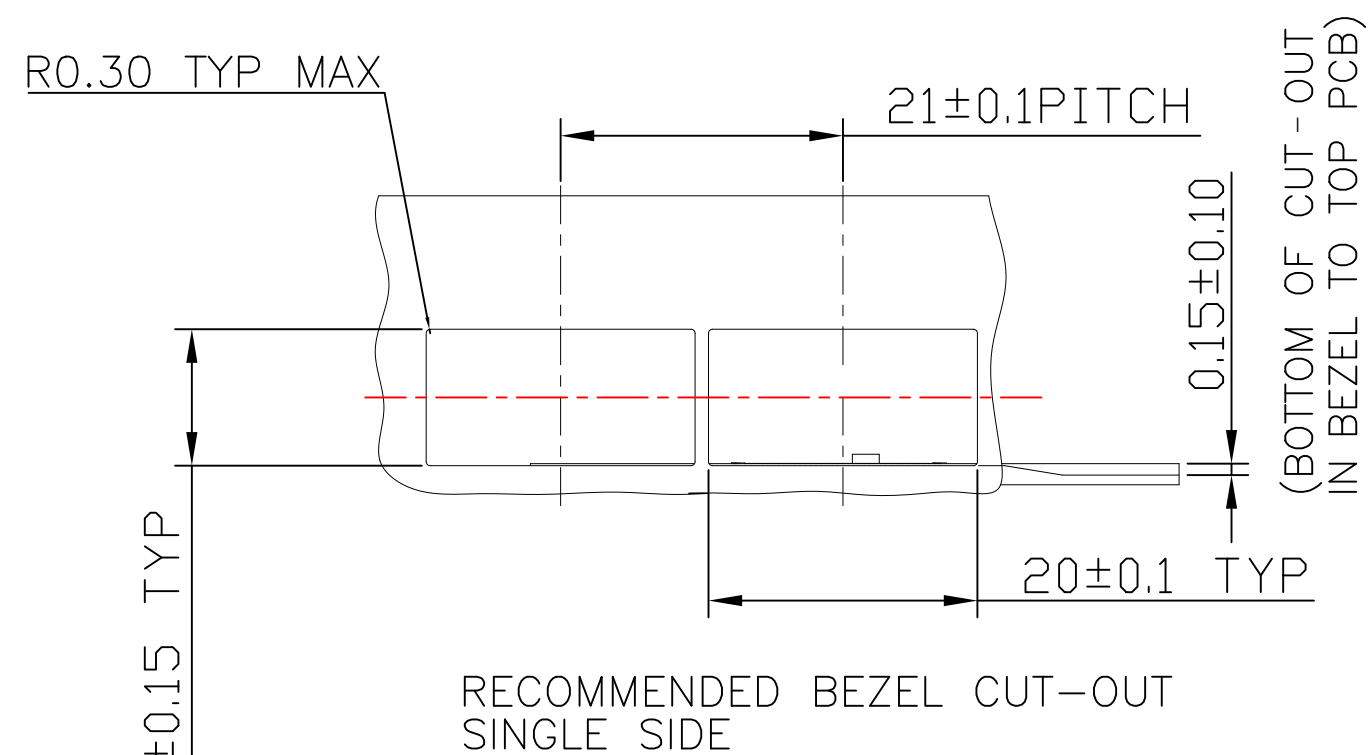

TITLE QSFP28 1X1 CAGE WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP11FC01000			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	° X±0.20	° X±1°	SCALE:1:1	SHEET:2/4
LEO	JAMES	JAMES	° XX±0.15	° XX±5°		
			° XXX±0.10			

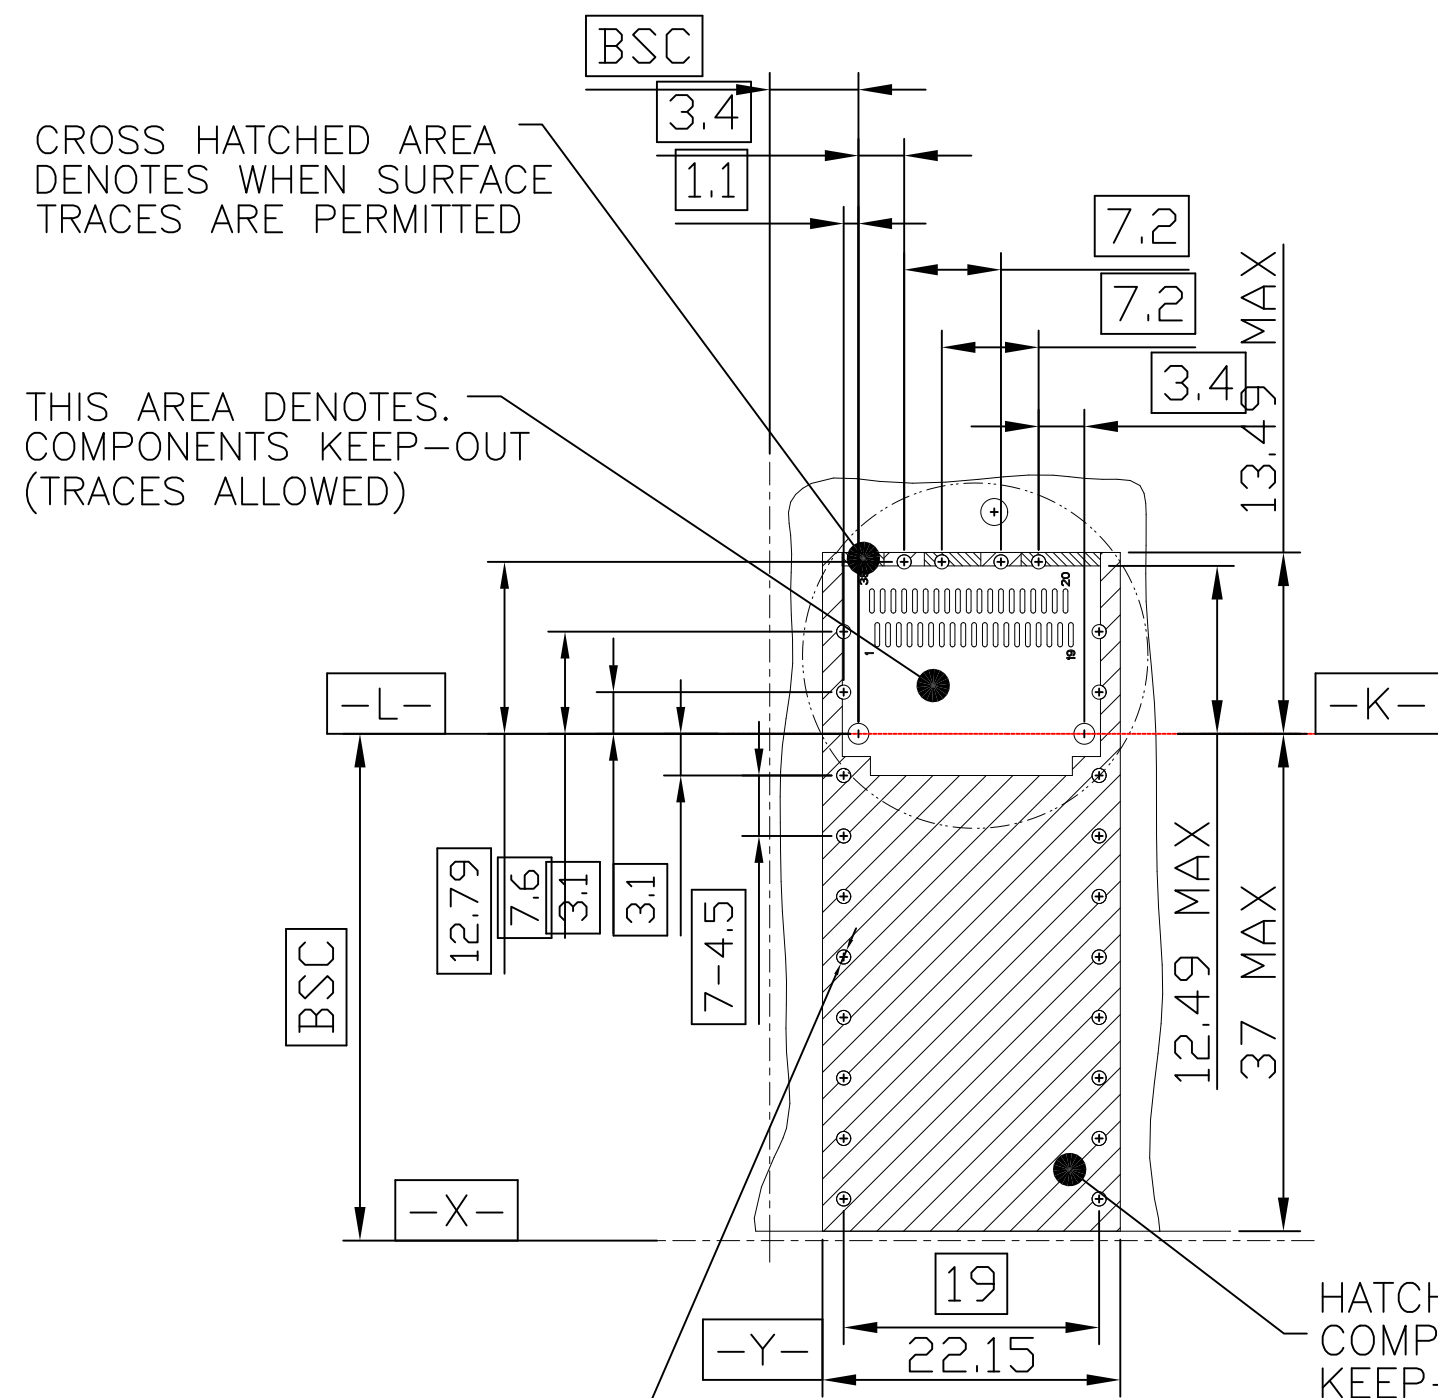


CROSS HATCHED AREA
DENOTES WHEN SURFACE
TRACES ARE PERMITTED


THIS AREA DENOTES
COMPONENTS KEEP-OUT
(TRACES ALLOWED)

24- $\phi 1.05 \pm 0.05$
COMPLIANT PIN HOLE
 $\phi \phi 0.10M A K \textcircled{S} L \textcircled{S}$


RECOMMENDED PCB LAYOUT
BELLY TO BELLY TYPE OF 2
REAR HOLES OF LEGS PCB
TOLERANCE: ± 0.05

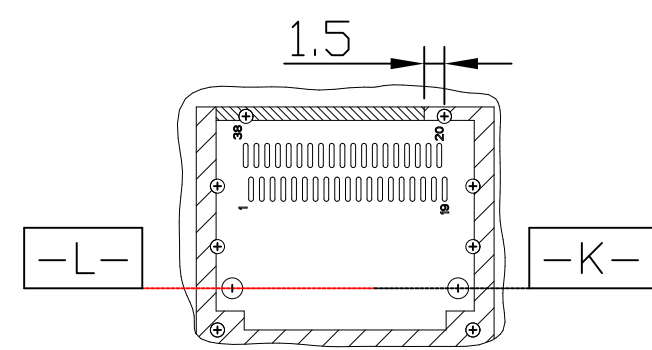

RECOMMENDED PCB LAYOUT
BELLY TO BELLY TYPE OF 1
REAR HOLES OF LEGS
PCB TOLERANCE: ± 0.05 SCALE 1:1

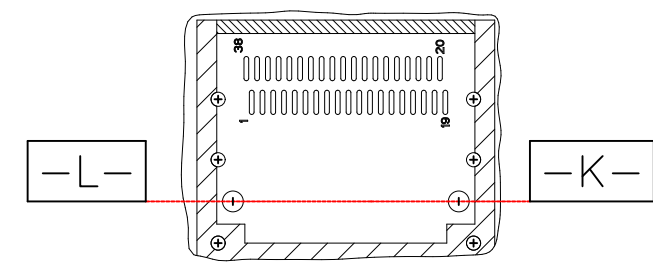

RECOMMENDED PCB LAYOUT
BELLY TO BELLY TYPE OF 0
REAR HOLES OF LEGS
PCB TOLERANCE: ± 0.05 SCALE 1:1

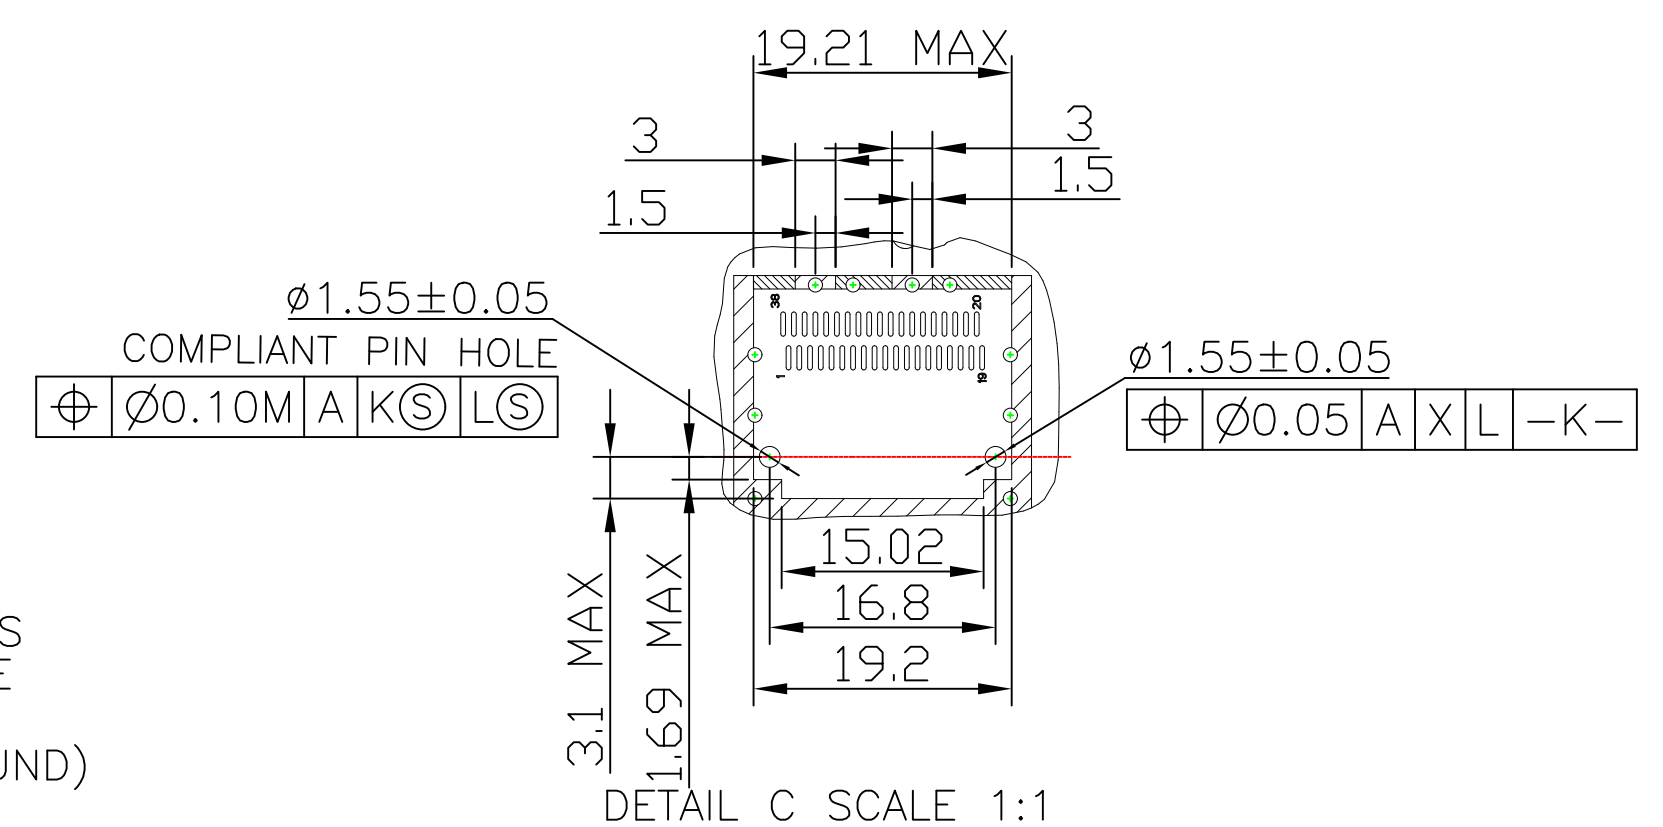

DETAIL C SCALE 1:1



TITLE QSFP28 1X1 CAGE WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP11FC01000			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	° X±0.20	° X±1°	SCALE:1:1	SHEET:4/4
LEO	JAMES	JAMES	° XX±0.15	° XX±5°		
			° XXX±0.10			REV:A