

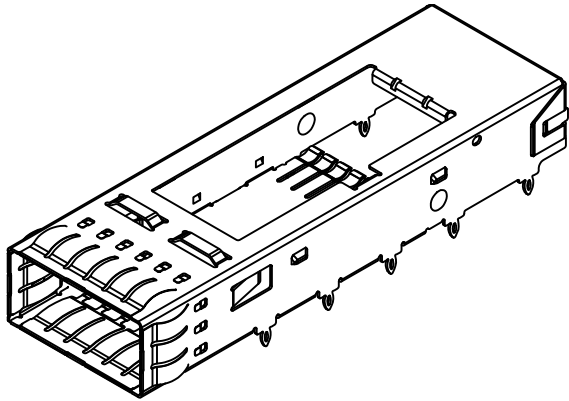
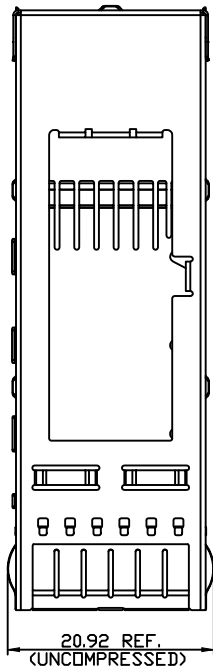


6	7	8
REV	DESCRIPTION OF CHANGE	REVIEWED BY
A	FIRST ISSUE	LEO
		ISSUE DATE
		2021-09-15

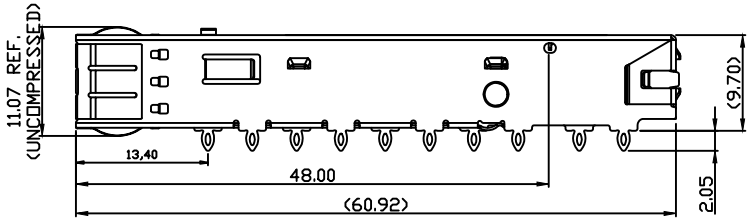


1. MATERIALS:
BODY CAGE: STAINLESS STEEL, 0.25 THICKNESS
EMI FINGER: STAINLESS STEEL
2. SURFACE FINISH:
BODY CAGE: CLEANING
EMI SPRING: CLEANING AND HOLE SEALING
3. MATE WITH QSFP MSA COMPATIBLE TRANSCEIVER.
4. REFERENCE DOCUMENTS:
PRODUCT SPECIFICATION: QSFP MSA
5. THIS PRODUCT COMPLY TO ROHS DIRECTIVE 2011/65/EU.




TITLE			QSFP28 1x1 CAGE WITH EMI SPRING FINGER				LINK-PP INT'L TECHNOLOGY CO., LIMITED							
PART NO.			LP11FC01000E		GENNERAL TOLERANCE			UNIT:MM		SIZE:A4				
APPROVE		CHECK	DRAW		。 X±0.20		。 X±1°		SCALE:1:1		SHEET:1/3		REV:A	
LEO		JAMES		。 XX±0.15		。 XX±5°								
				。 XXX±0.10										

BEZEL AND BOARD POSITION DIMENSION
FOR SINGLE SIDE MOUNTING (SPRING FINGER)

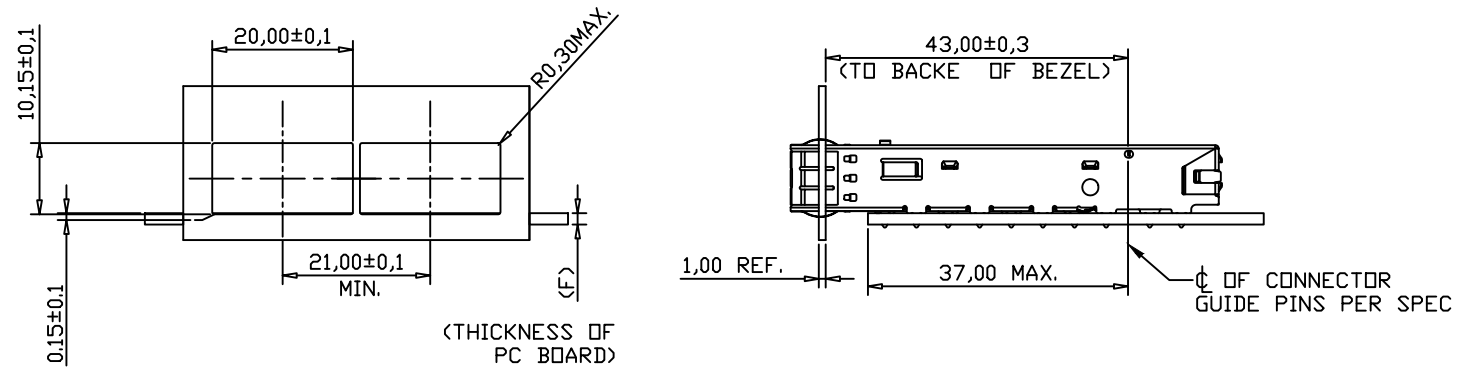

BEZEL AND BOARD POSITION DIMENSION
FOR BELLY TO BELLY MOUNTING (SPRING FINGER)

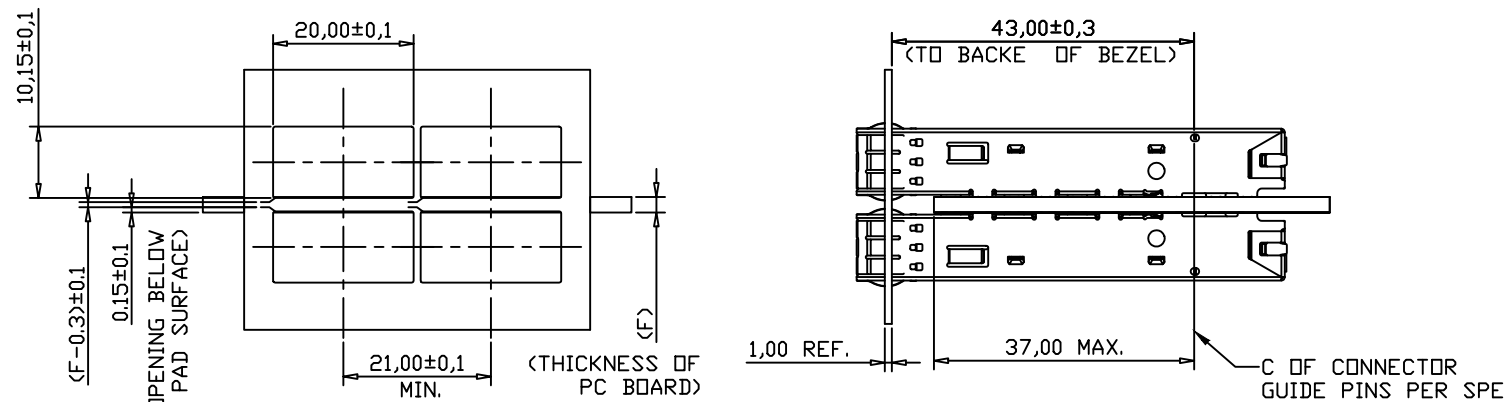


NOTES:

1. THE NORMAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD.(DIM. "F")
SINGLE SIDED PC BOARD THICKNESS: 1.60mm MIN.
BELLY TO BELLY PC BOARD MIN. THICKNESS: 3.0mm MIN.
2. GENERAL TOLERANCE: ±0.05.



TITLE			QSFP28 1x1 CAGE WITH EMI SPRING FINGER					LINK-PP INT'L TECHNOLOGY CO., LIMITED						
PART NO.			LP11FC01000E			GENNERAL TOLERANCE				UNIT:MM		SIZE:A4		
APPROVE		CHECK	DRAW		. X±0.20		. X±1°		SCALE:1:1		SHEET:2/3		REV:A	
LEO		JAMES	JAMES		. XX±0.15		. XX±5°							
					. XXX±0.10									

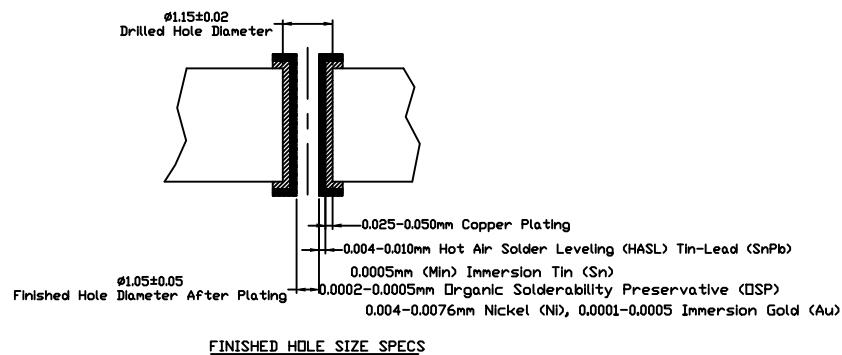

- [illegible]



TITLE			QSFP28 1x1 CAGE WITH EMI SPRING FINGER		LINK-PP INT'L TECHNOLOGY CO., LIMITED				
PART NO.			LP11FC01000E		GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	. X±0.20		. X±1°		SCALE:1:1	SHEET:3/3	REV:A
LEO	JAMES	JAMES	. XX±0.15		. XX±5°				
			. XXX±0.10						