




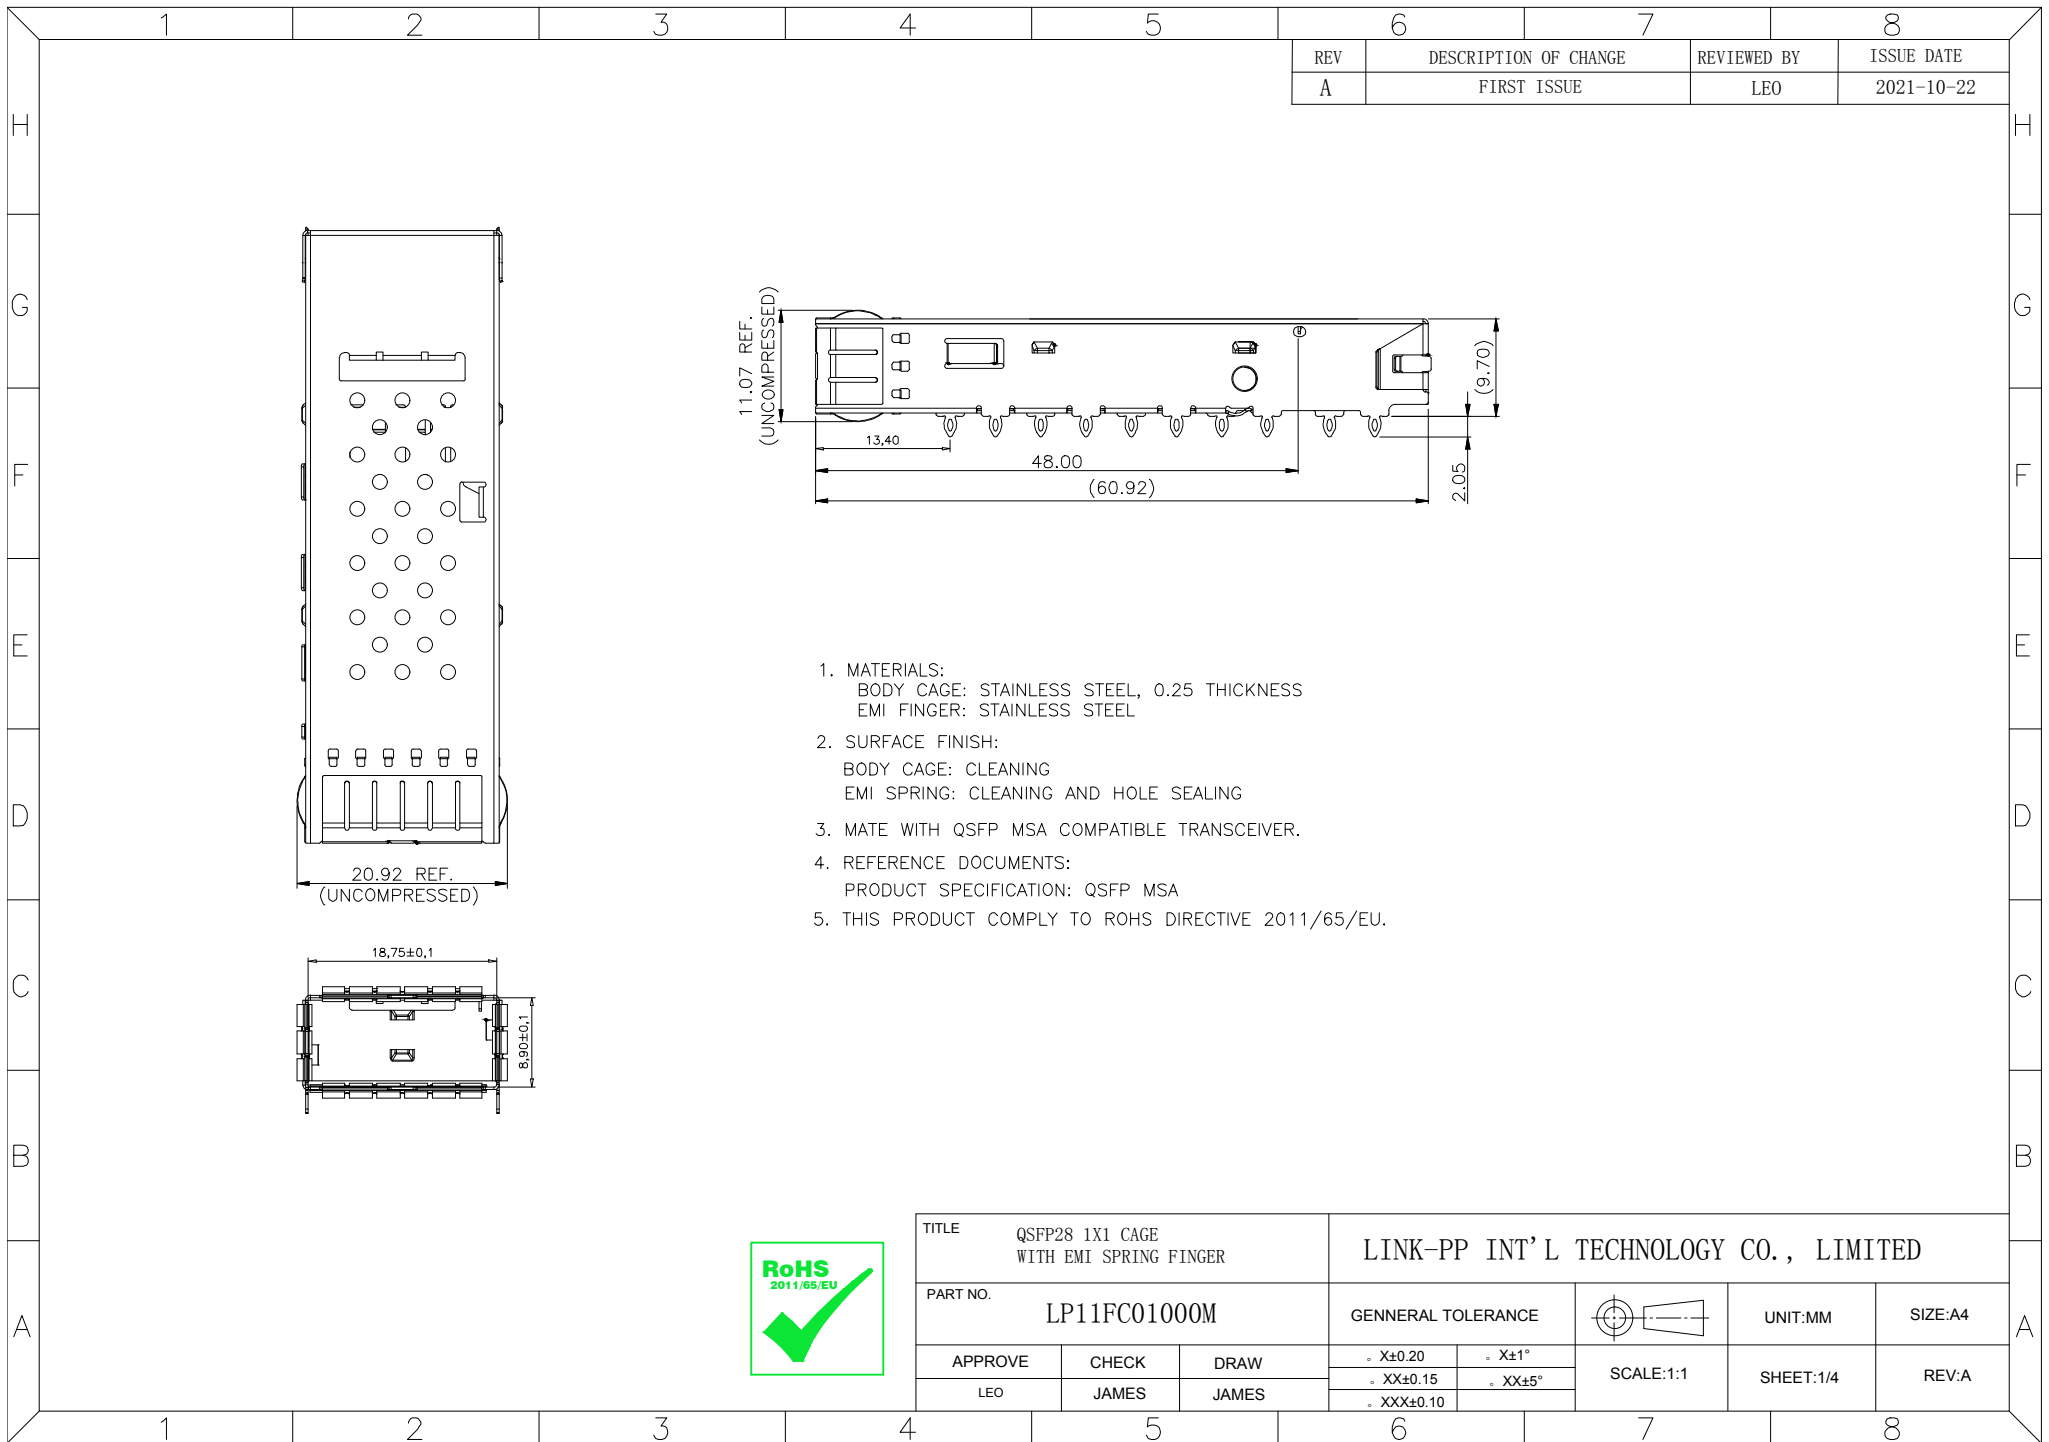


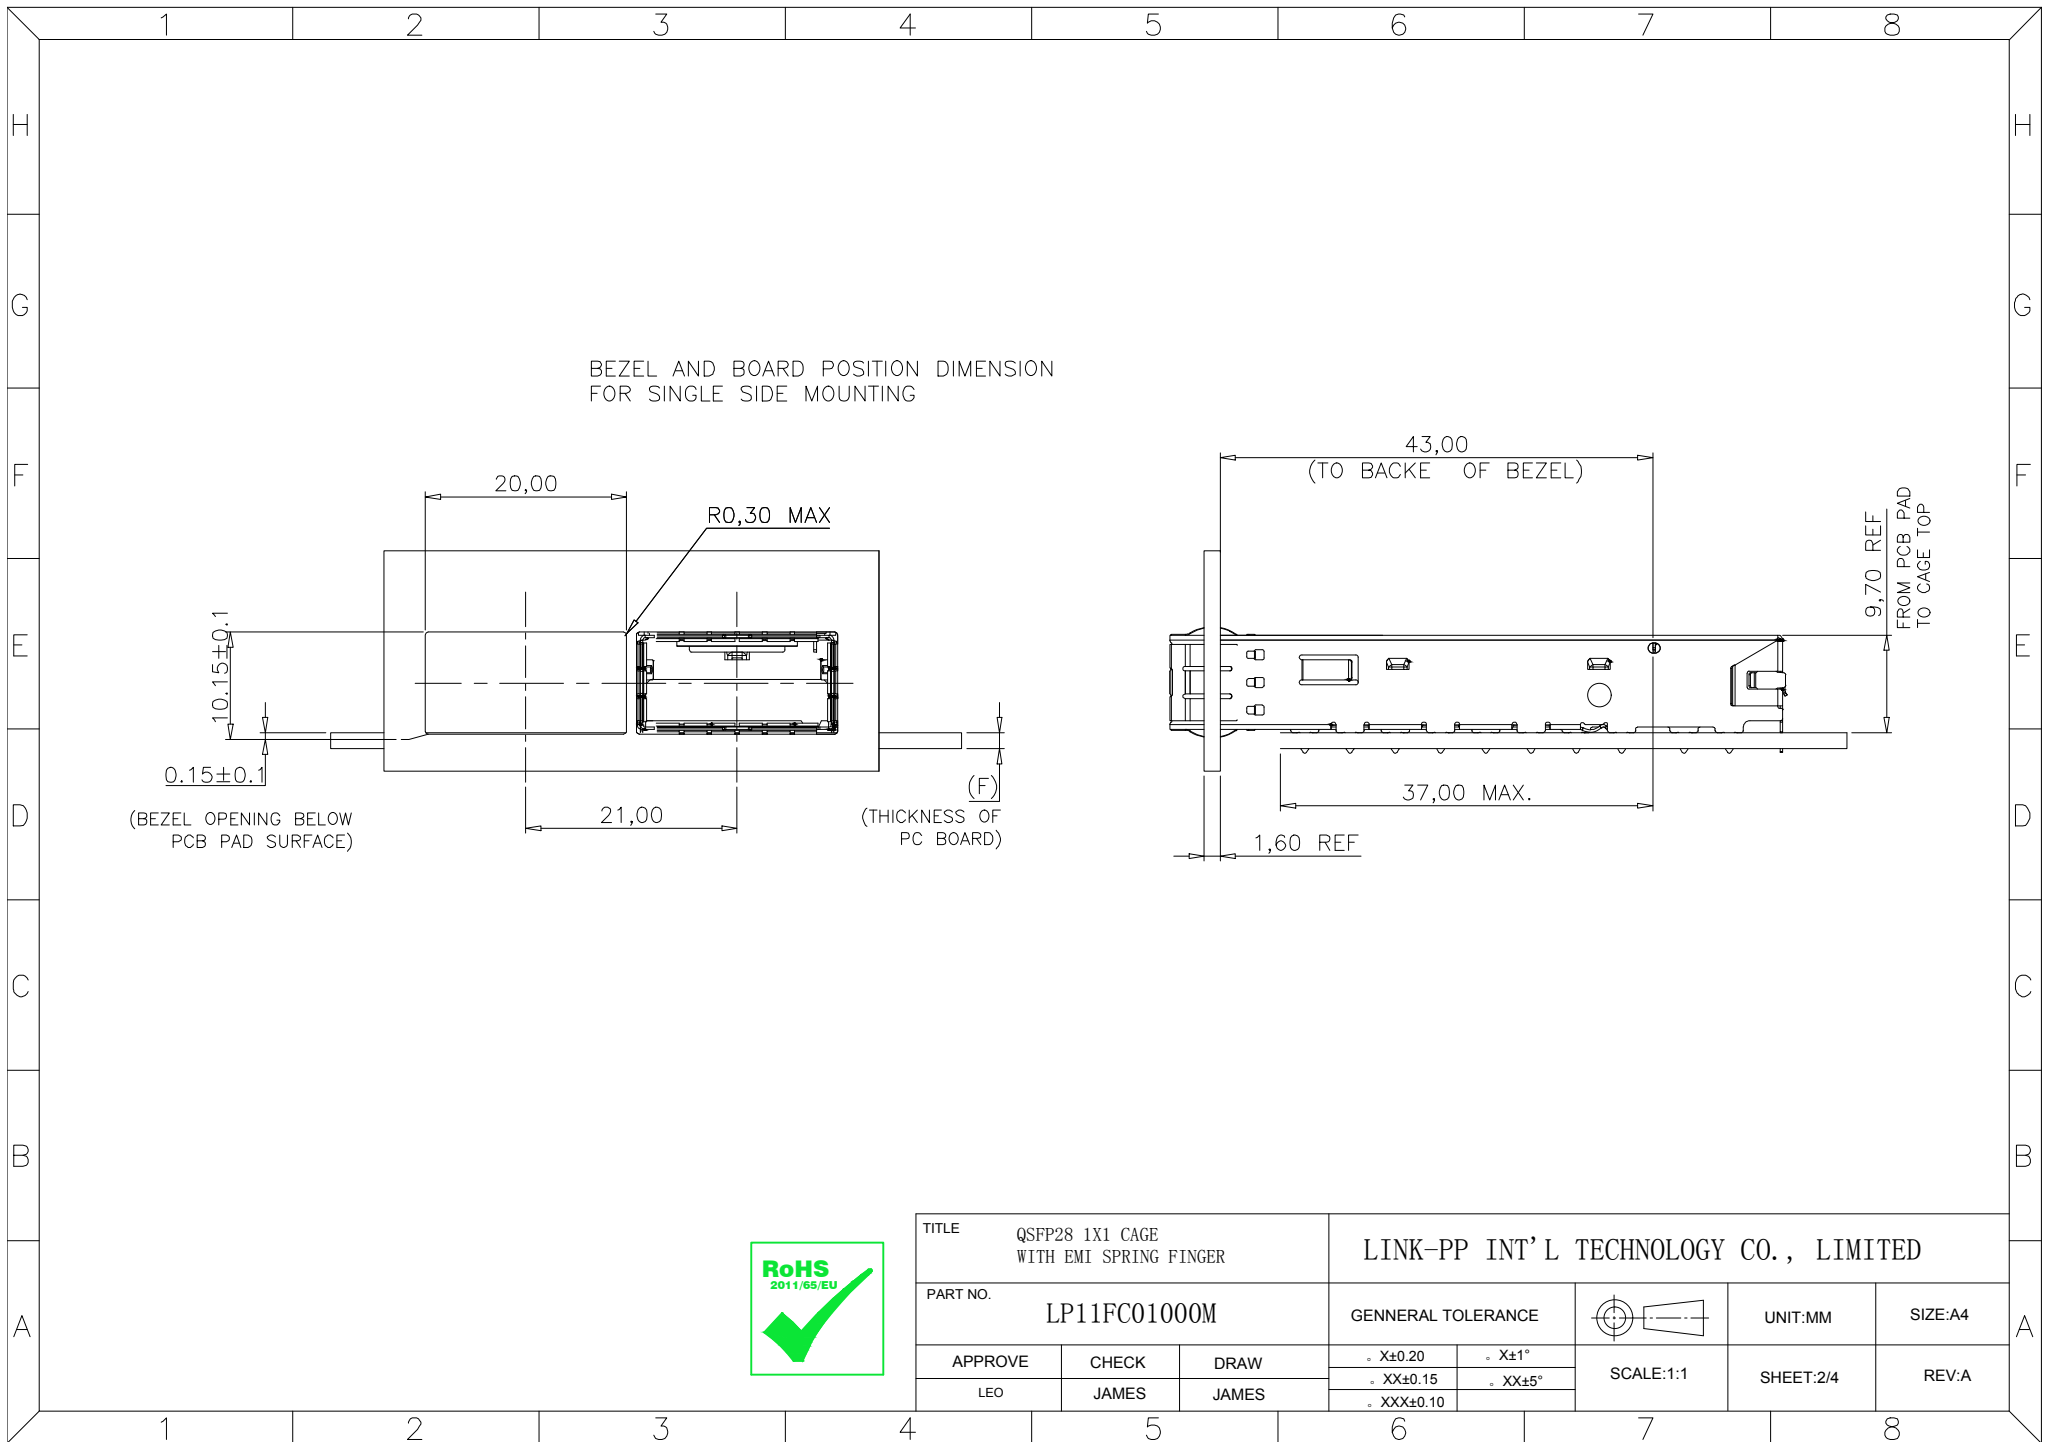

BEZEL AND BOARD POSITION DIMENSION
FOR BELLY TO BELLY MOUNTING

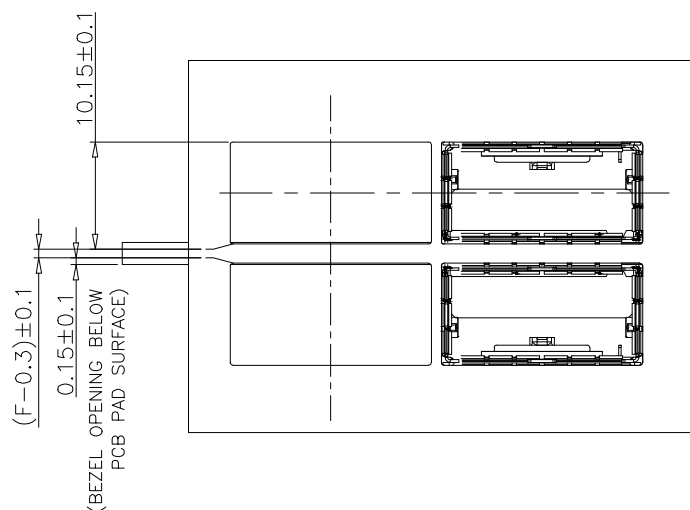

(F)
(THICKNESS OF
PC BOARD)

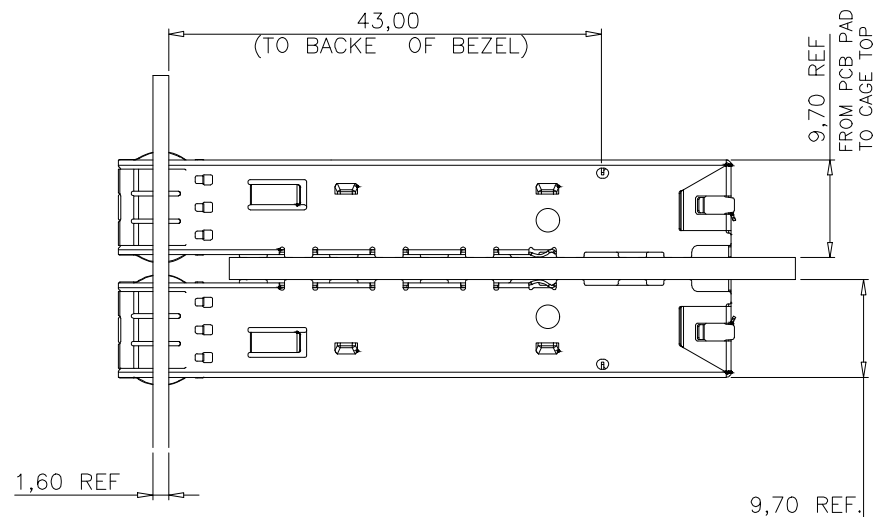


NOTES:


1. THE NORMAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD.(DIM. "F")
SINGLE SIDED PC BOARD THICKNESS: 1.60mm MIN.
BELLY TO BELLY PC BOARD THICKNESS: 3.0mm MIN.
2. GENERAL TOLERANCE: ± 0.05 .



TITLE QSFP28 1X1 CAGE WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP11FC01000M			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	• X±0.20	• X±1°	SCALE:1:1	SHEET:3/4
LEO	JAMES	JAMES	• XX±0.15	• XX±5°		
			• XXX±0.10			

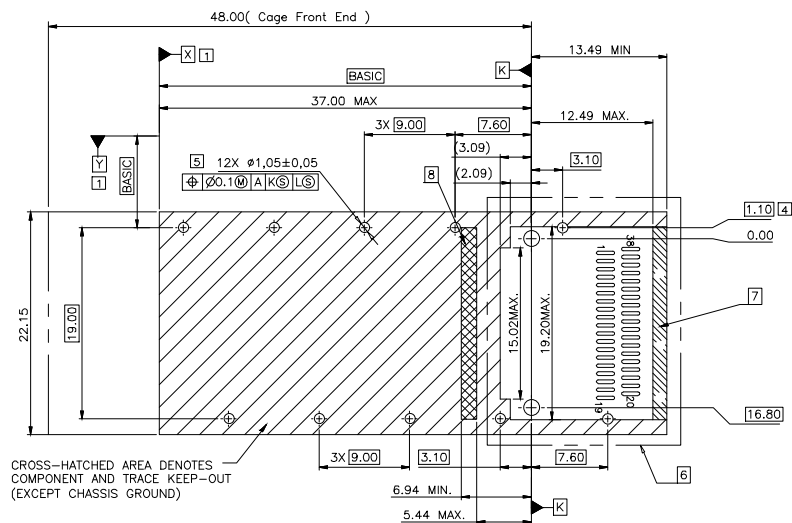

RECOMMENDED SINGLE SIDE PC BOARD LAYOUT

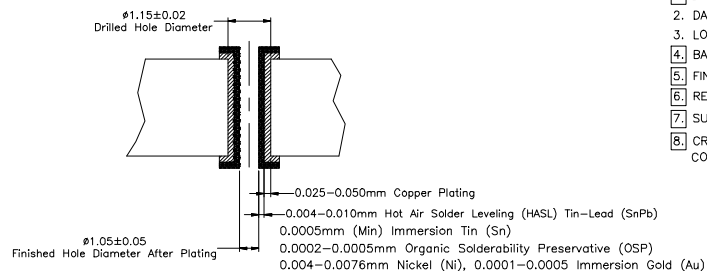

FINISHED HOLE SIZE SPECS

NOTES:

- [1] DATUM X & Y ARE ESTABLISHED BY THE CUSTOMER'S FIDUCIAL
2. DATUM A IS THE TOP SURFACE OF THE HOST BOARD
3. LOCATION OF THE EDGE OF PCB IS APPLICATION SPECIFIC
- [4] BASELINE FOR THESE DIMENSIONS IS THE CENTER OF COMPLIANT PIN HOLE.
- [5] FINISHED HOLE SIZE
- [6] REFER TO SFF8662 FOR CONNECTOR FOOTING DIMENSIONS
- [7] SURFACE TRACES PERMITTED WITHIN THIS SHADED AREA
- [8] CROSS HATCHED AREA DENOTES EMI GROUNDING PAD MUST BE CONNECTED TO CHASSIS GROUND



TITLE			QSFP28 1X1 CAGE WITH EMI SPRING FINGER					LINK-PP INT'L TECHNOLOGY CO., LIMITED					
PART NO.			LP11FC01000M			GENNERAL TOLERANCE				UNIT:MM		SIZE:A4	
APPROVE		CHECK	DRAW	. X±0.20		. X±1°		SCALE:1:1		SHEET:4/4		REV:A	
LEO		JAMES	JAMES	. XX±0.15		. XX±5°							
				. XXX±0.10									