


REV	DESCRIPTION OF CHANGE	REVIEWED BY	ISSUE DATE
A	FIRST ISSUE	LEO	2023-03-20

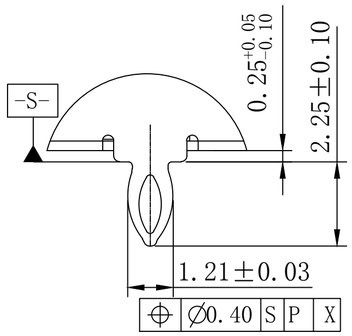



DETAIL A
SCALE 5:1

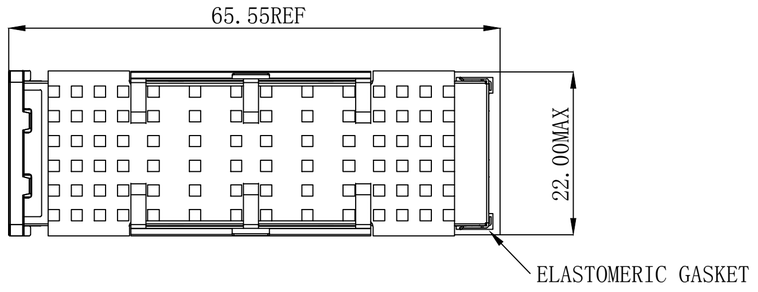




DETAIL B
SCALE 5:1

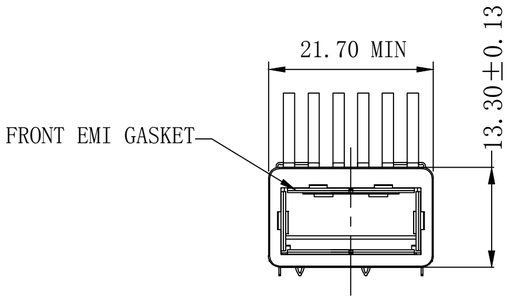

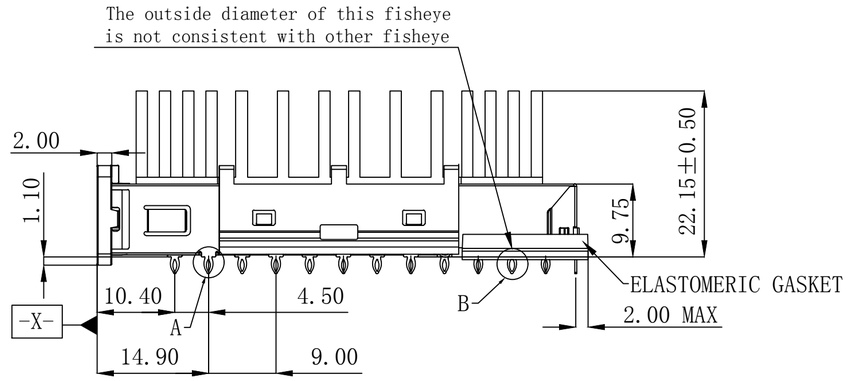





NOTE:
MATERIAL:
1. XFP CAGE: COPPER ALLOY C7701 T=0.25mm.
2. ELASTOMERIC GASKET: CONDUCTIVE RUBBER.
3. XFP CAGE REAR EMI GASKET: CONDUCTIVE FOAM.
4. FRONT FLANGE: ZINC ALLOY.
5. FRONT EMI GASKET: COPPER ALLOY.
6. XFP HEAT SINK CLIP: COPPER ALLOY C7701 T=0.25mm.
7. XFP HEAT SINK: ALUMINUM ,6063-T5
FLATNESS SHOULD BE LESS THAN 0.05mm ON CONTACT SURFACE.
PLATED:
1. FRONT FLANGE : PLATING NICKLE OVER ALL;
2. FRONT EMI GASKET: PLATING NICKLE OVER ALL;
MECHANICAL REQUIREMENT:
1. DURABILITY: 100 CYCLES MIN.
2. INSERTION AND EXTRACTION FORCE: 40N MAX & 30N MAX


RoHS 2011/65/EU


TITLE	XFP 1X1 CAGE WITH EMI SPRING FINGER HEAT SINK	LINK-PP INT'L TECHNOLOGY CO., LIMITED
PART NO.	LP11LC010C0S	GENNERAL TOLERANCE: ◦ X±0.20, ◦ X±1°, ◦ XX±0.15, ◦ XX±5°, ◦ XXX±0.10
UNIT:MM	SIZE:A4	SCALE:1:1
SHEET:1/2	REV:A	

APPROVE	CHECK	DRAW
LEO	JAMES	JAMES

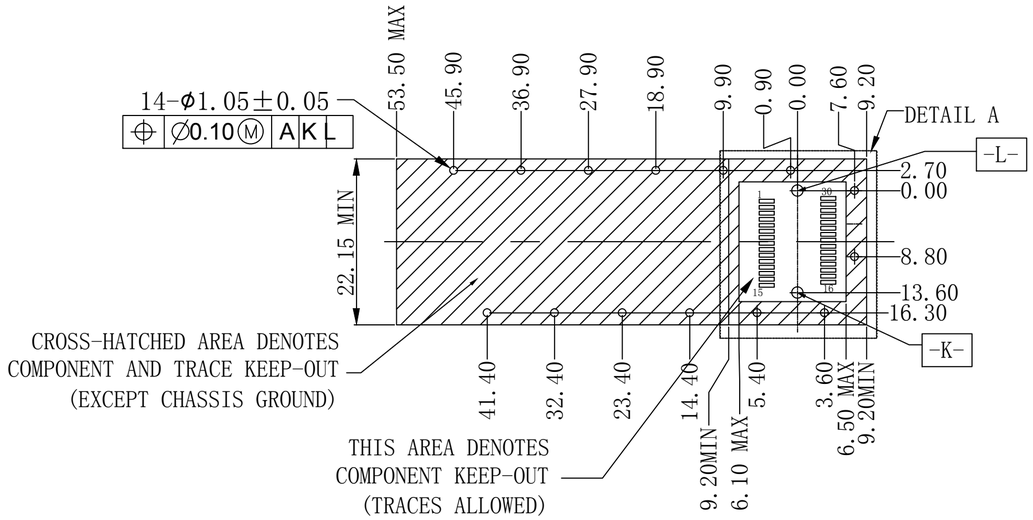

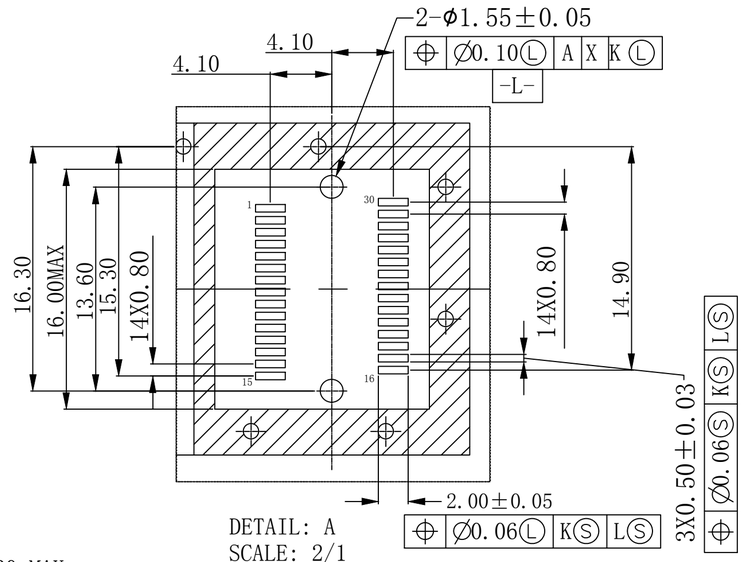

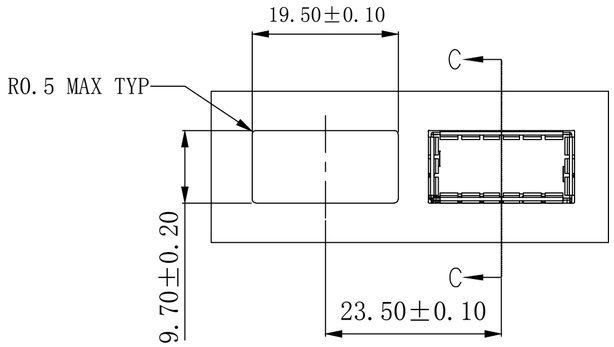

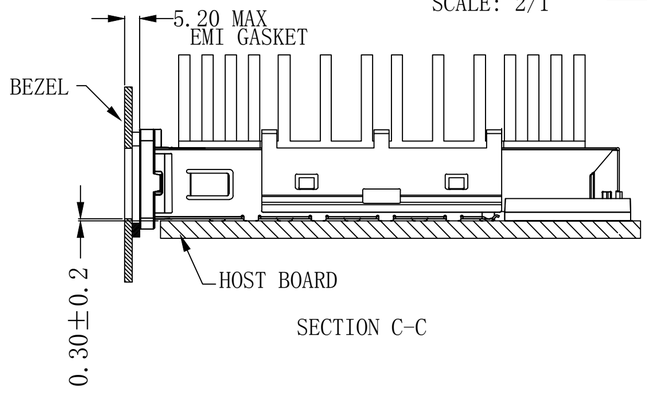

RoHS 2011/65/EU

TITLE: XFP 1X1 CAGE WITH EMI SPRING FINGER HEAT SINK			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP11LC010C0S			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:2/2	REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°			
			◦ XXX±0.10				