


REV.	DESCRIPTION OF CHANGE	REVIEWED BY	ISSUE DATE
A	FIRST ISSUE	LEO	2020-09-03

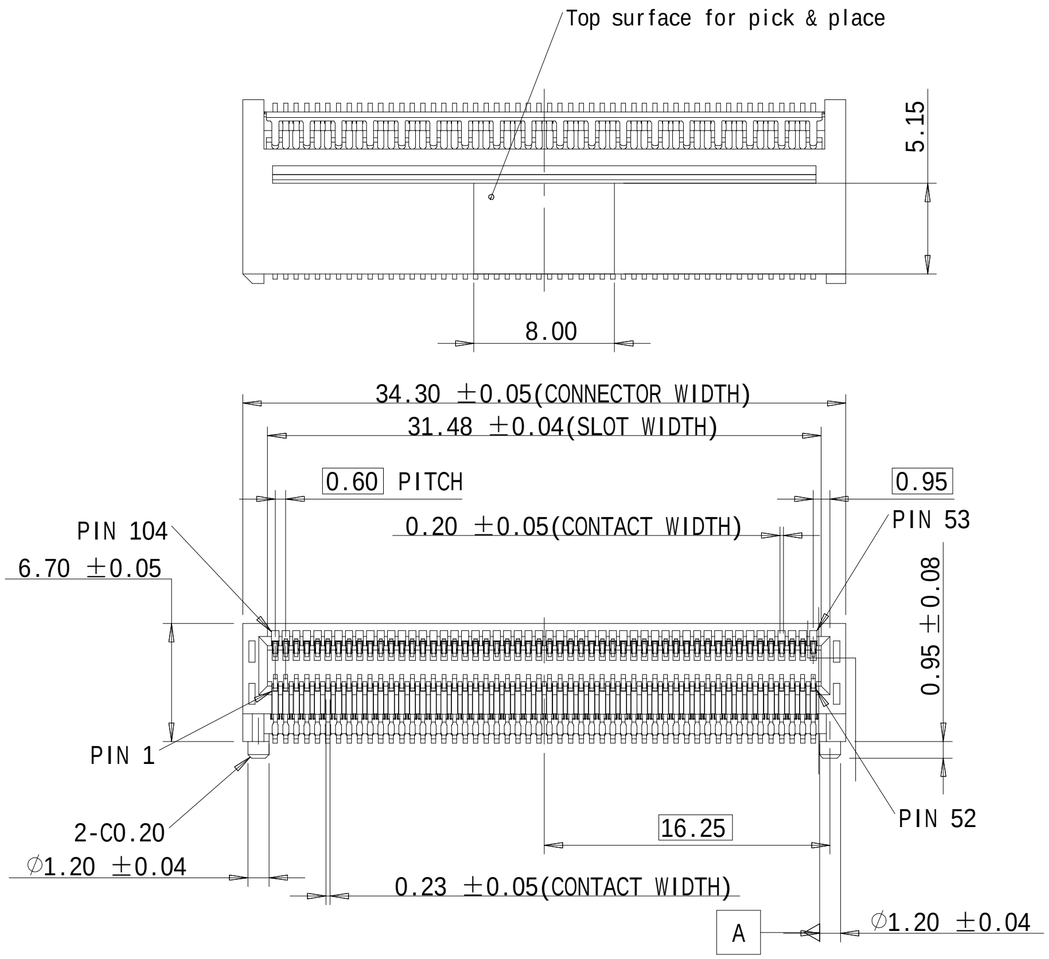

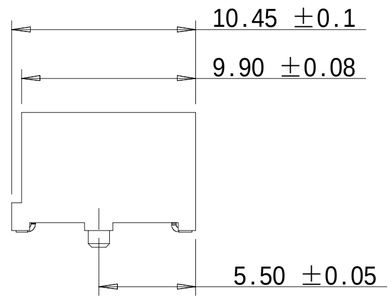


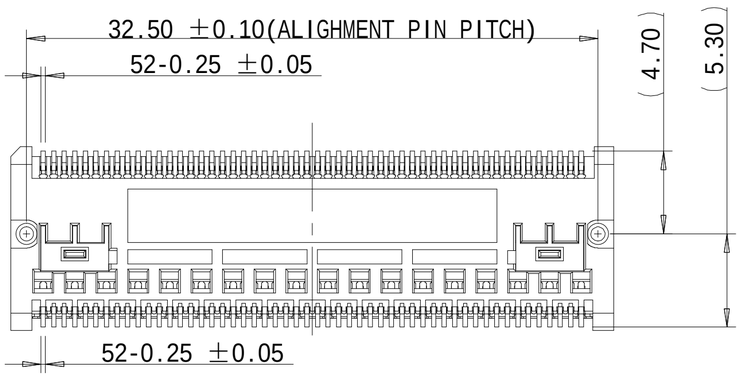

NOTE:
1.Material:
HOUSING: HIGH TEMERATURE LCP,BLACK,UL 94 V-0 FLAME RETARDANT.
2. TERMINAL : NICKEL COPPER ALLOY
PLATING SPEC AS BELOW:
CONTACT AREA PLATE NICKEL 1.27~7.6um,PLATE Gold 0.76um MIN
SOLDER AREA PLATE NICKEL 1.27~7.6um ,PLATE MATT TIN 2.54~7.6um
3.ELELCTRICAL CHARACTERISTICS
CONTACT CURRENT RATING:1AMPERE
VOLTAGE RATING:31.5VAC
CONTACT RESISTACE:30 MILLOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE:300VDC
4.ENVIRONMEENT
OPERATION TEMPERATURE:-40° C TO 85° C

RoHS 2011/65/EU

TITLE: CFP2 104PIN CONNECTOR			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP11P000003			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:1/2 REV:A
LEO	Kevin	Kevin	.XX±0.15	.XX±5°		
			.XXX±0.10			

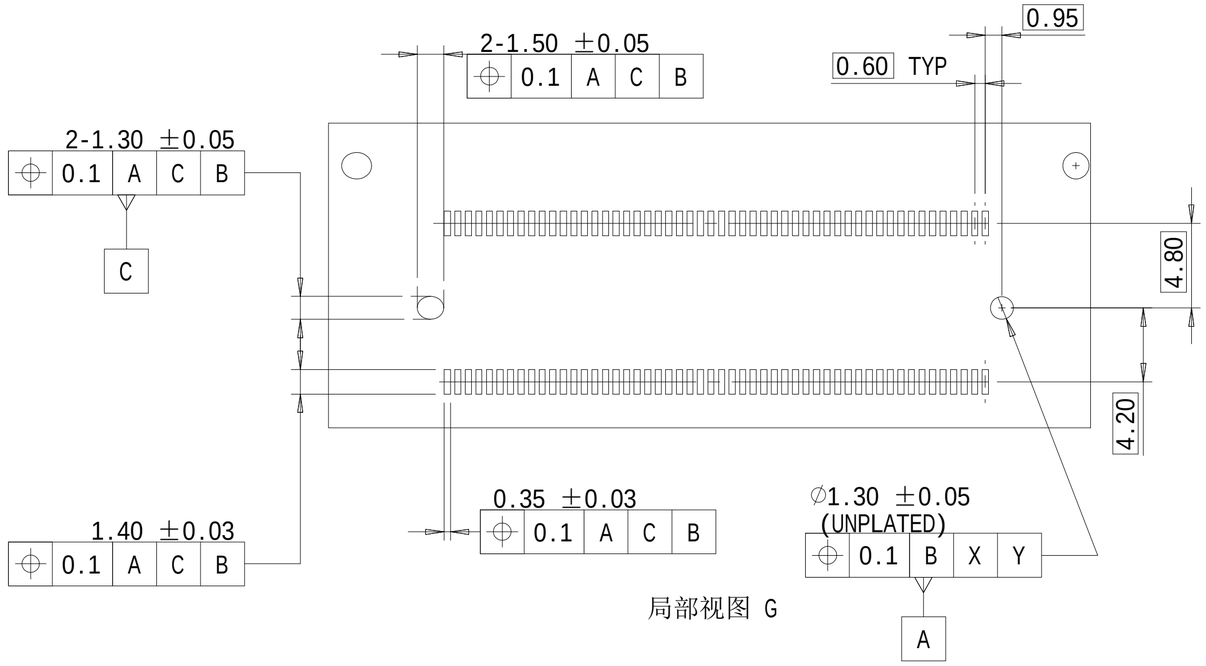

局部视图 G

NOTE:
1. DATUM DETERMINED BY OEM.
2.THIS DRAWING SHOWS SINGLE SIDE APPLICATION.

RoHS 2011/65/EU

TITLE: CFP2 104PIN CONNECTOR			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP11P000003			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:2/2	REV:A
LEO	Kevin	Kevin	.XX±0.15	.XX±5°			
			.XXX±0.10			