






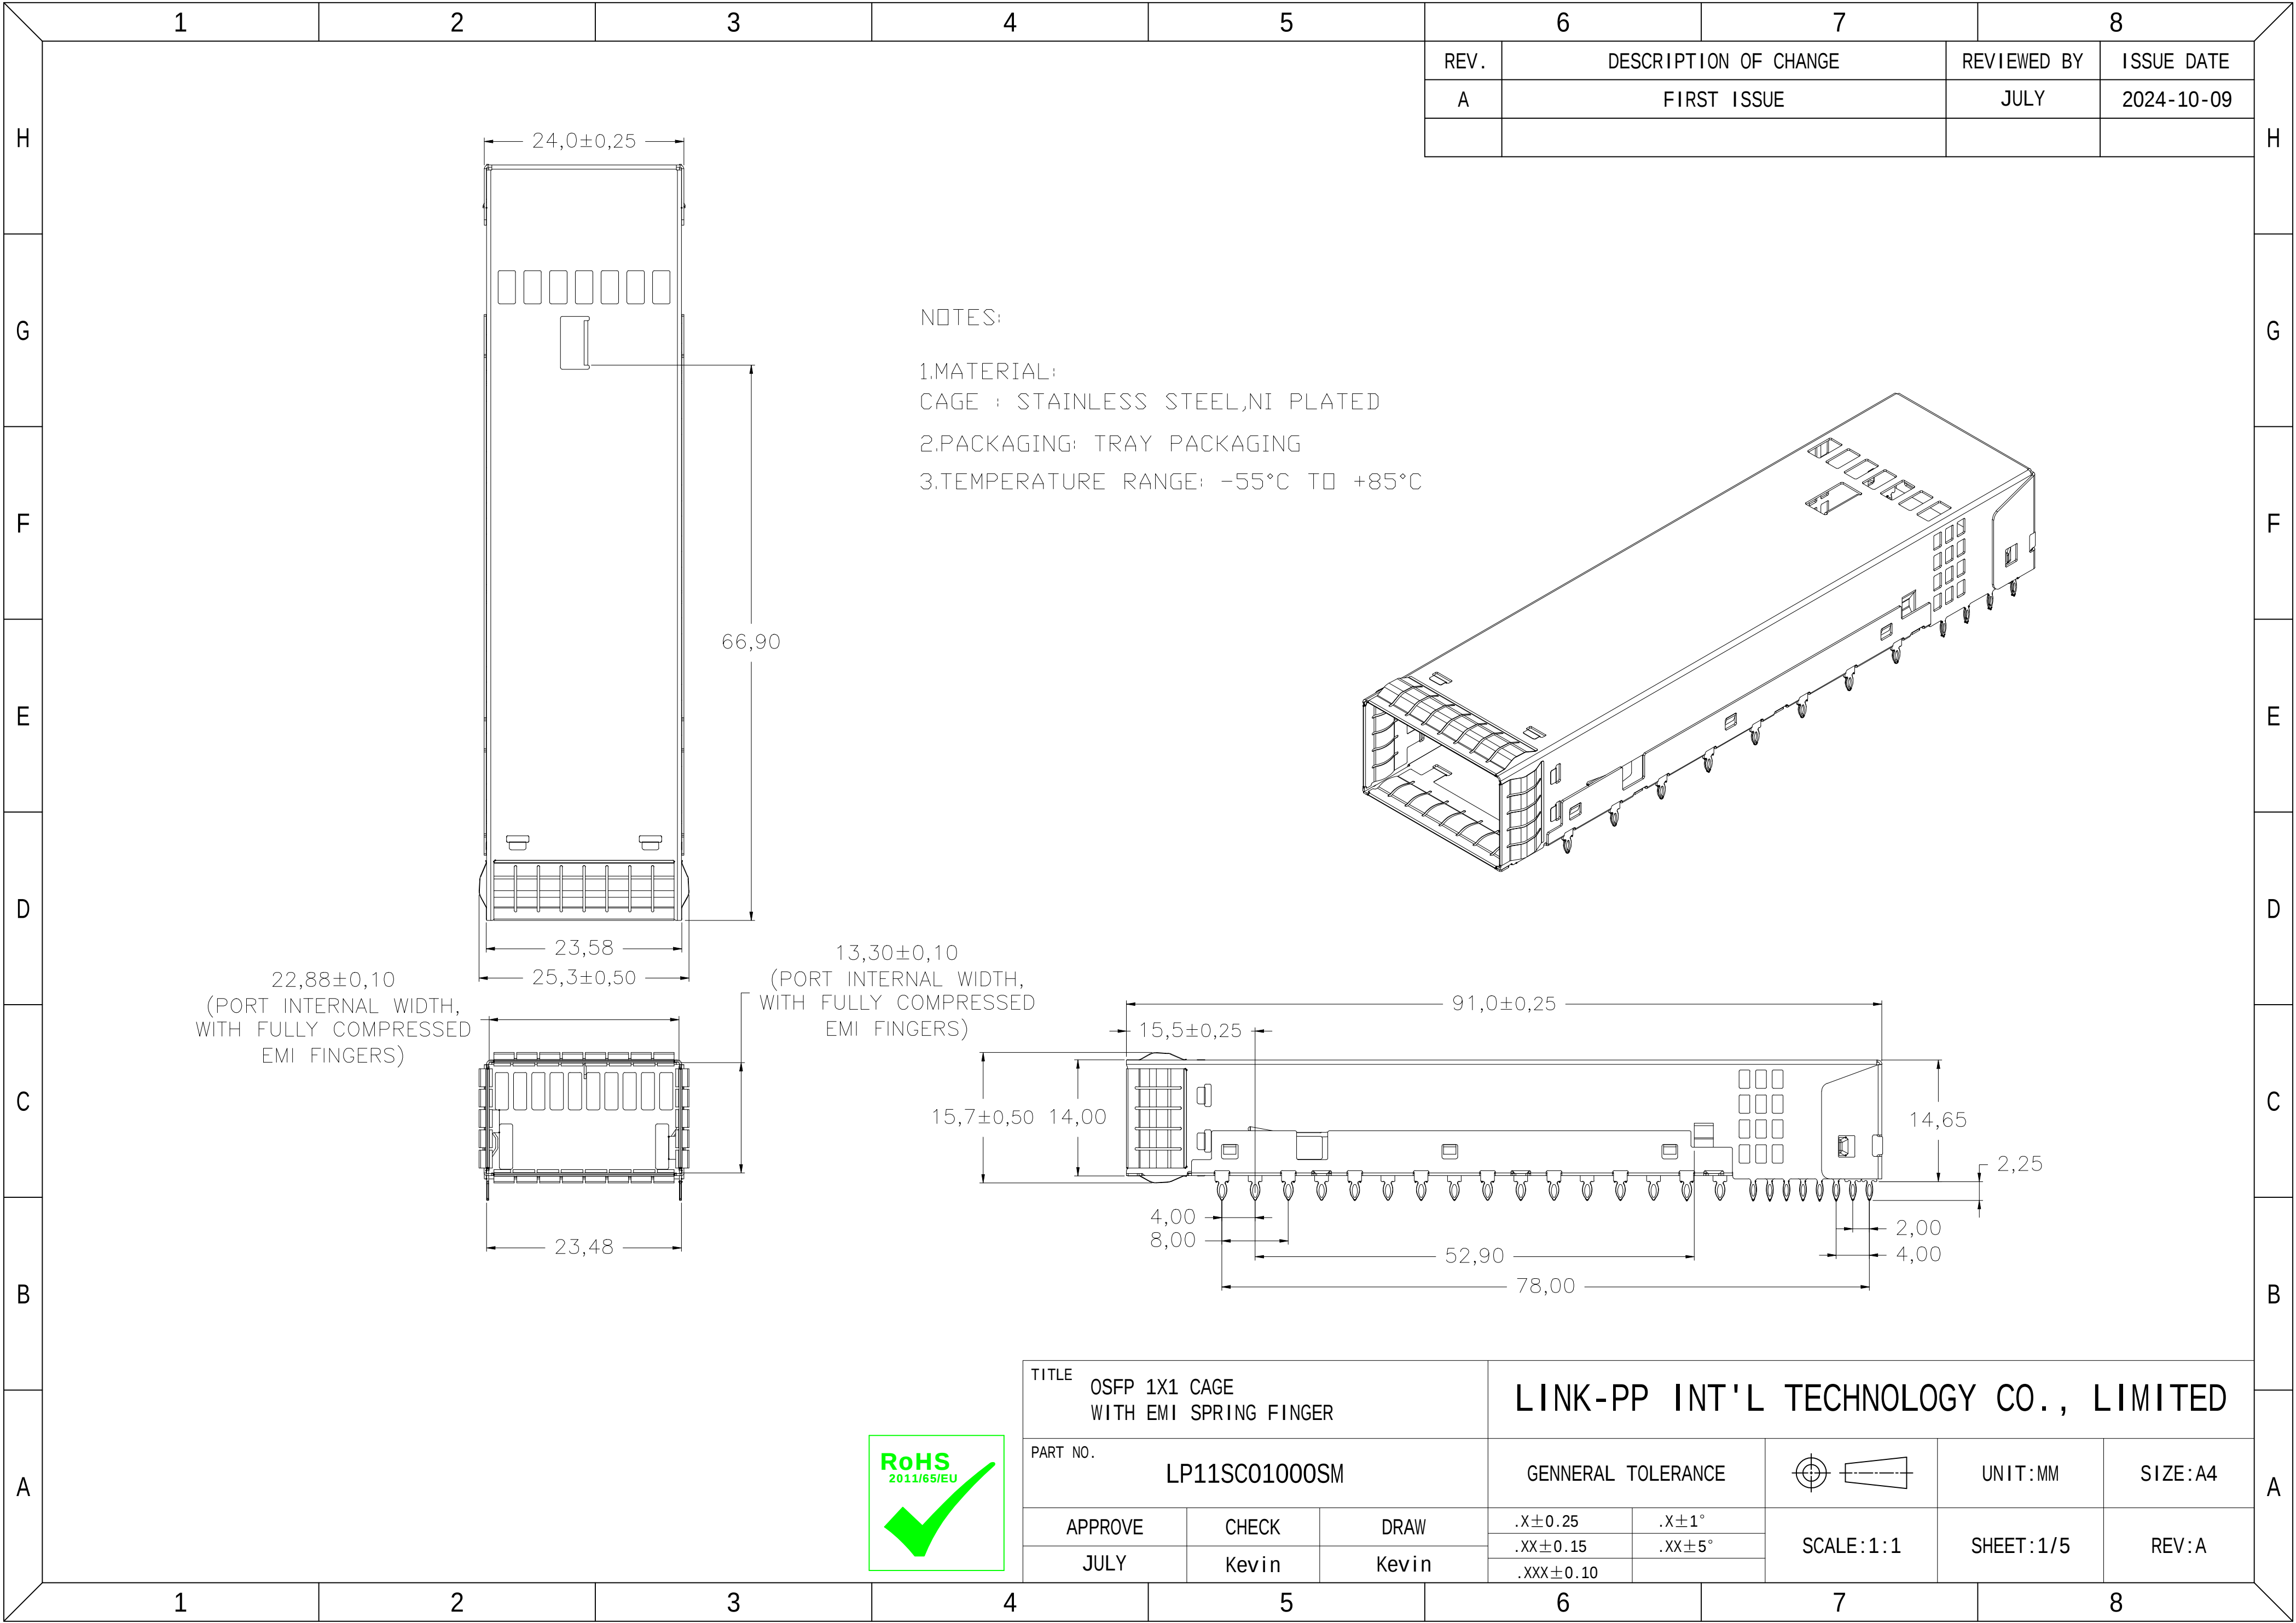


RECOMMENDED PCB DESIGN
FOR BELLY TO BELLY MOUNTING

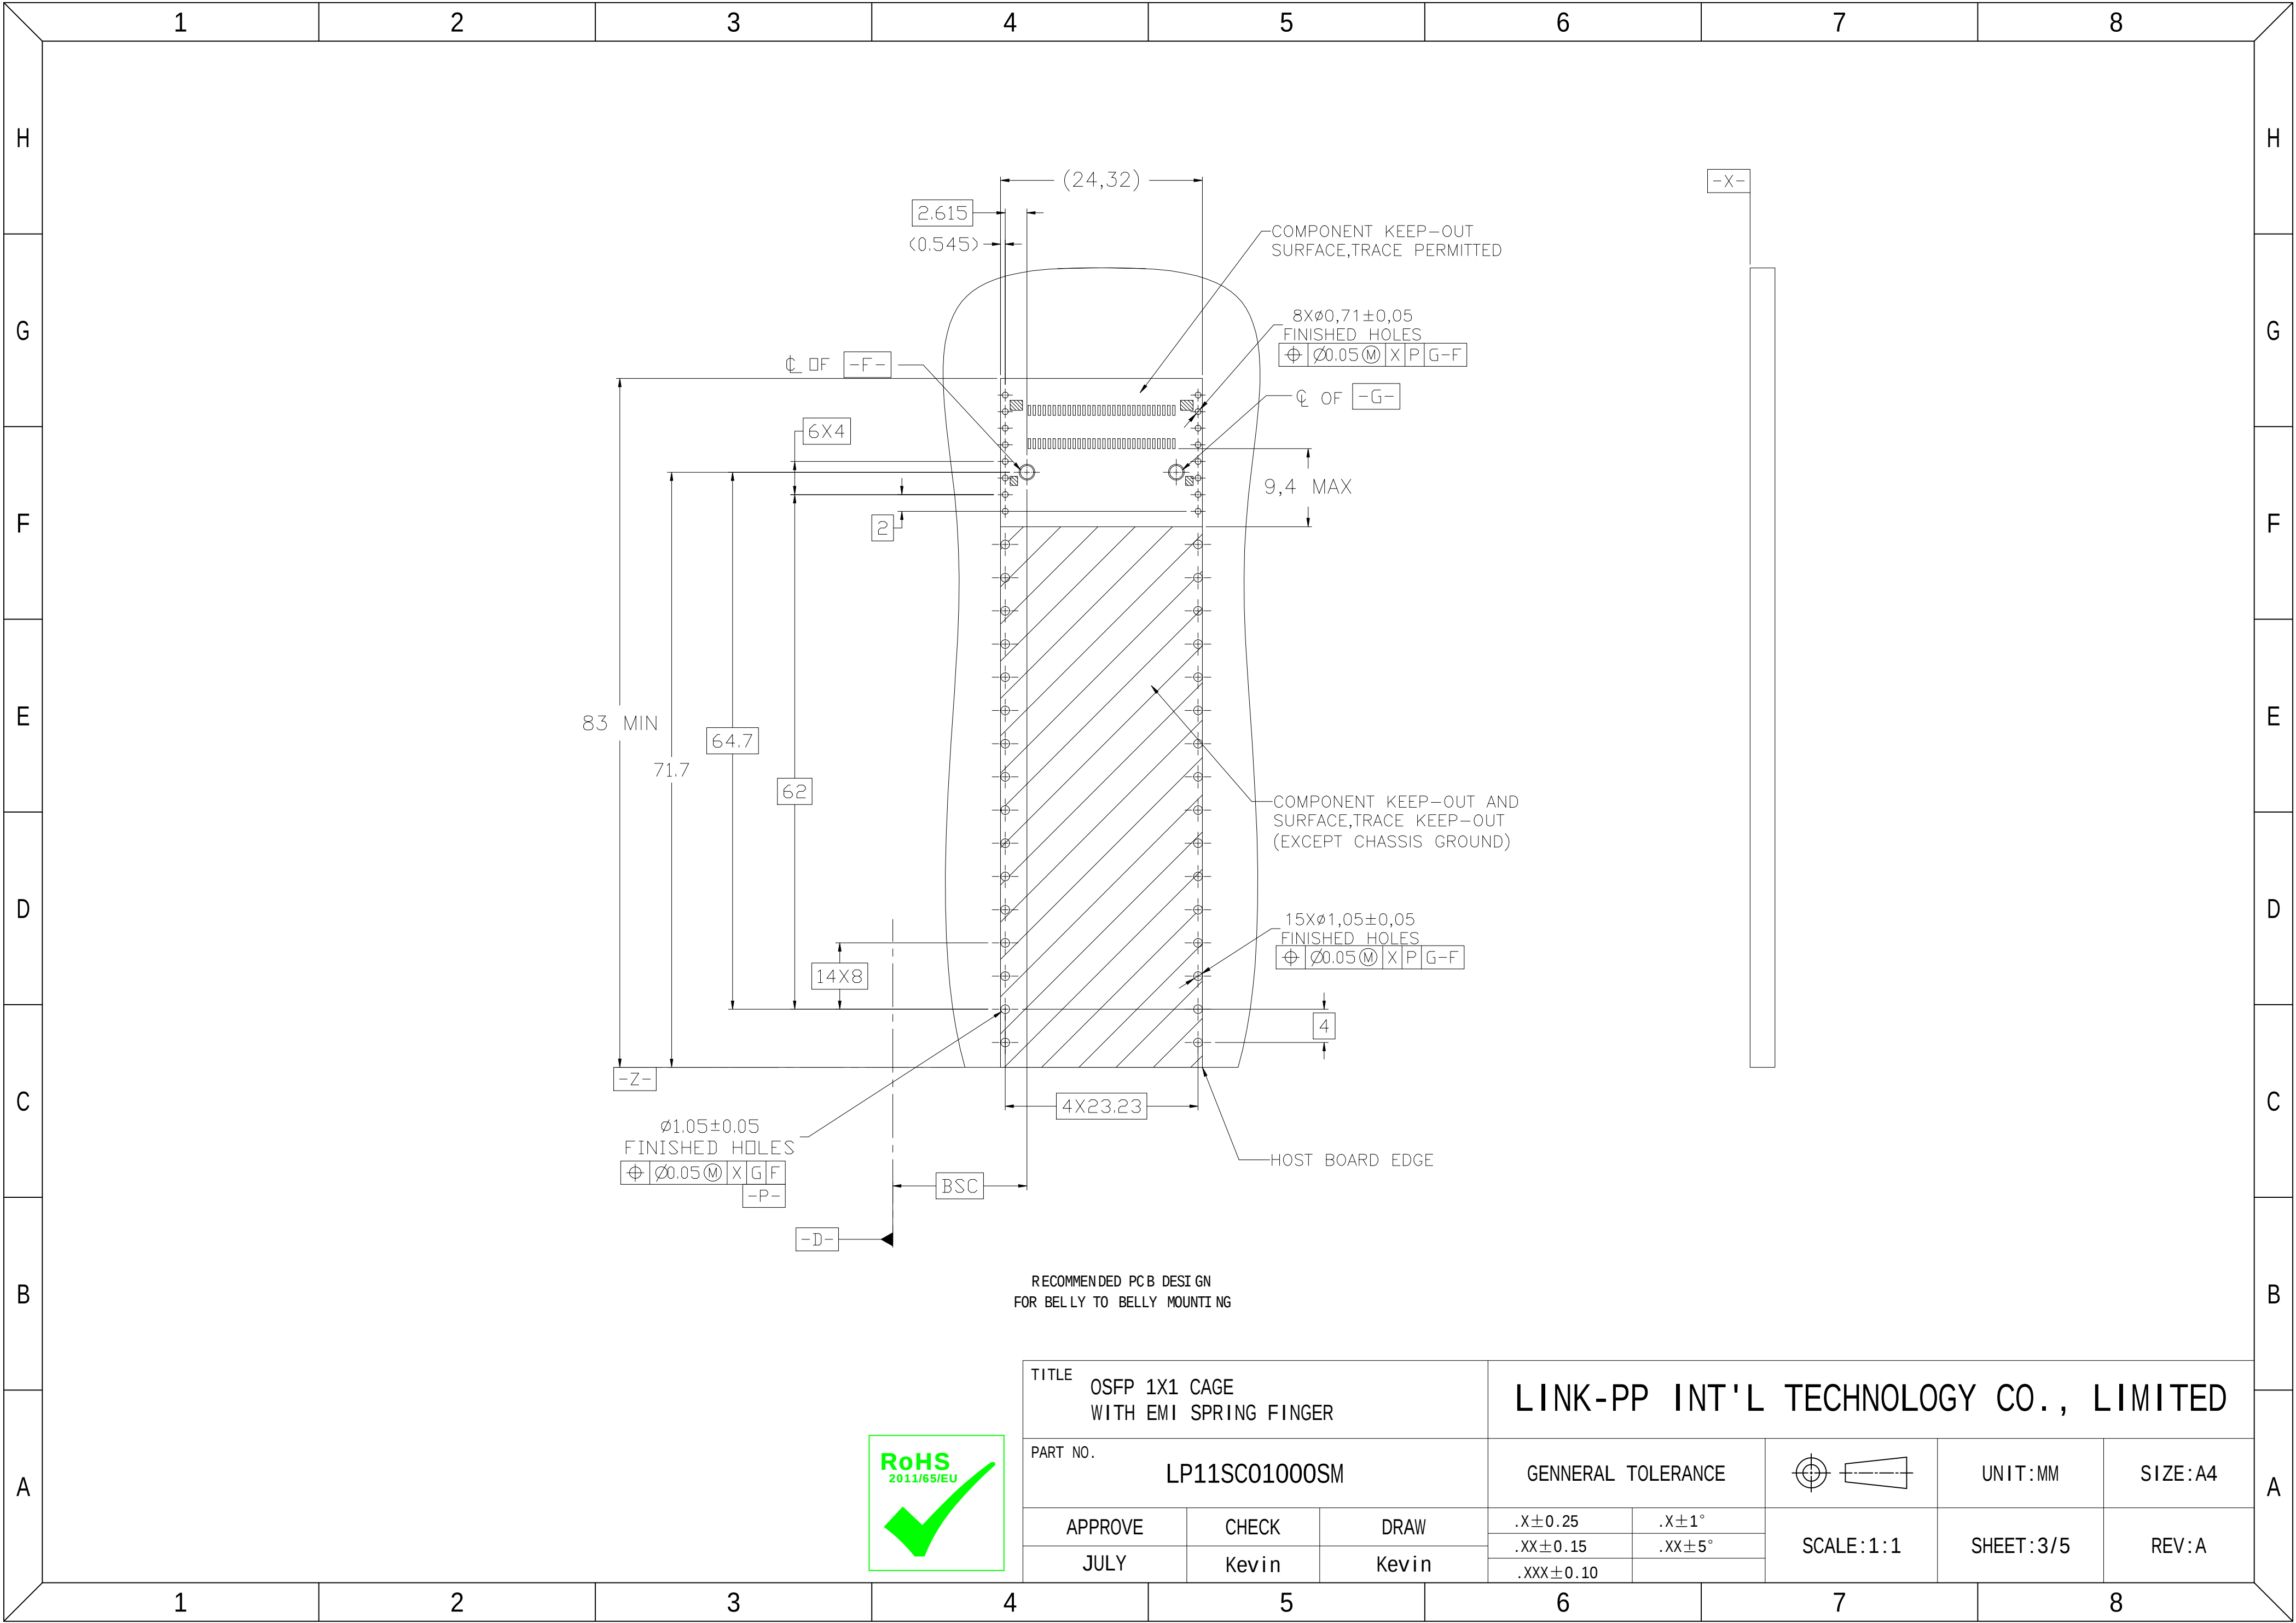


TITLE OSFP 1X1 CAGE WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP11SC01000SM			GENNERAL TOLERANCE			UNIT:MM
APPROVE JULY	CHECK Kevin	DRAW Kevin	.X±0.25	.X±1°	SCALE:1:1	SIZE:A4
			.XX±0.15	.XX±5°		SHEET:3/5
			.XXX±0.10			REV:A

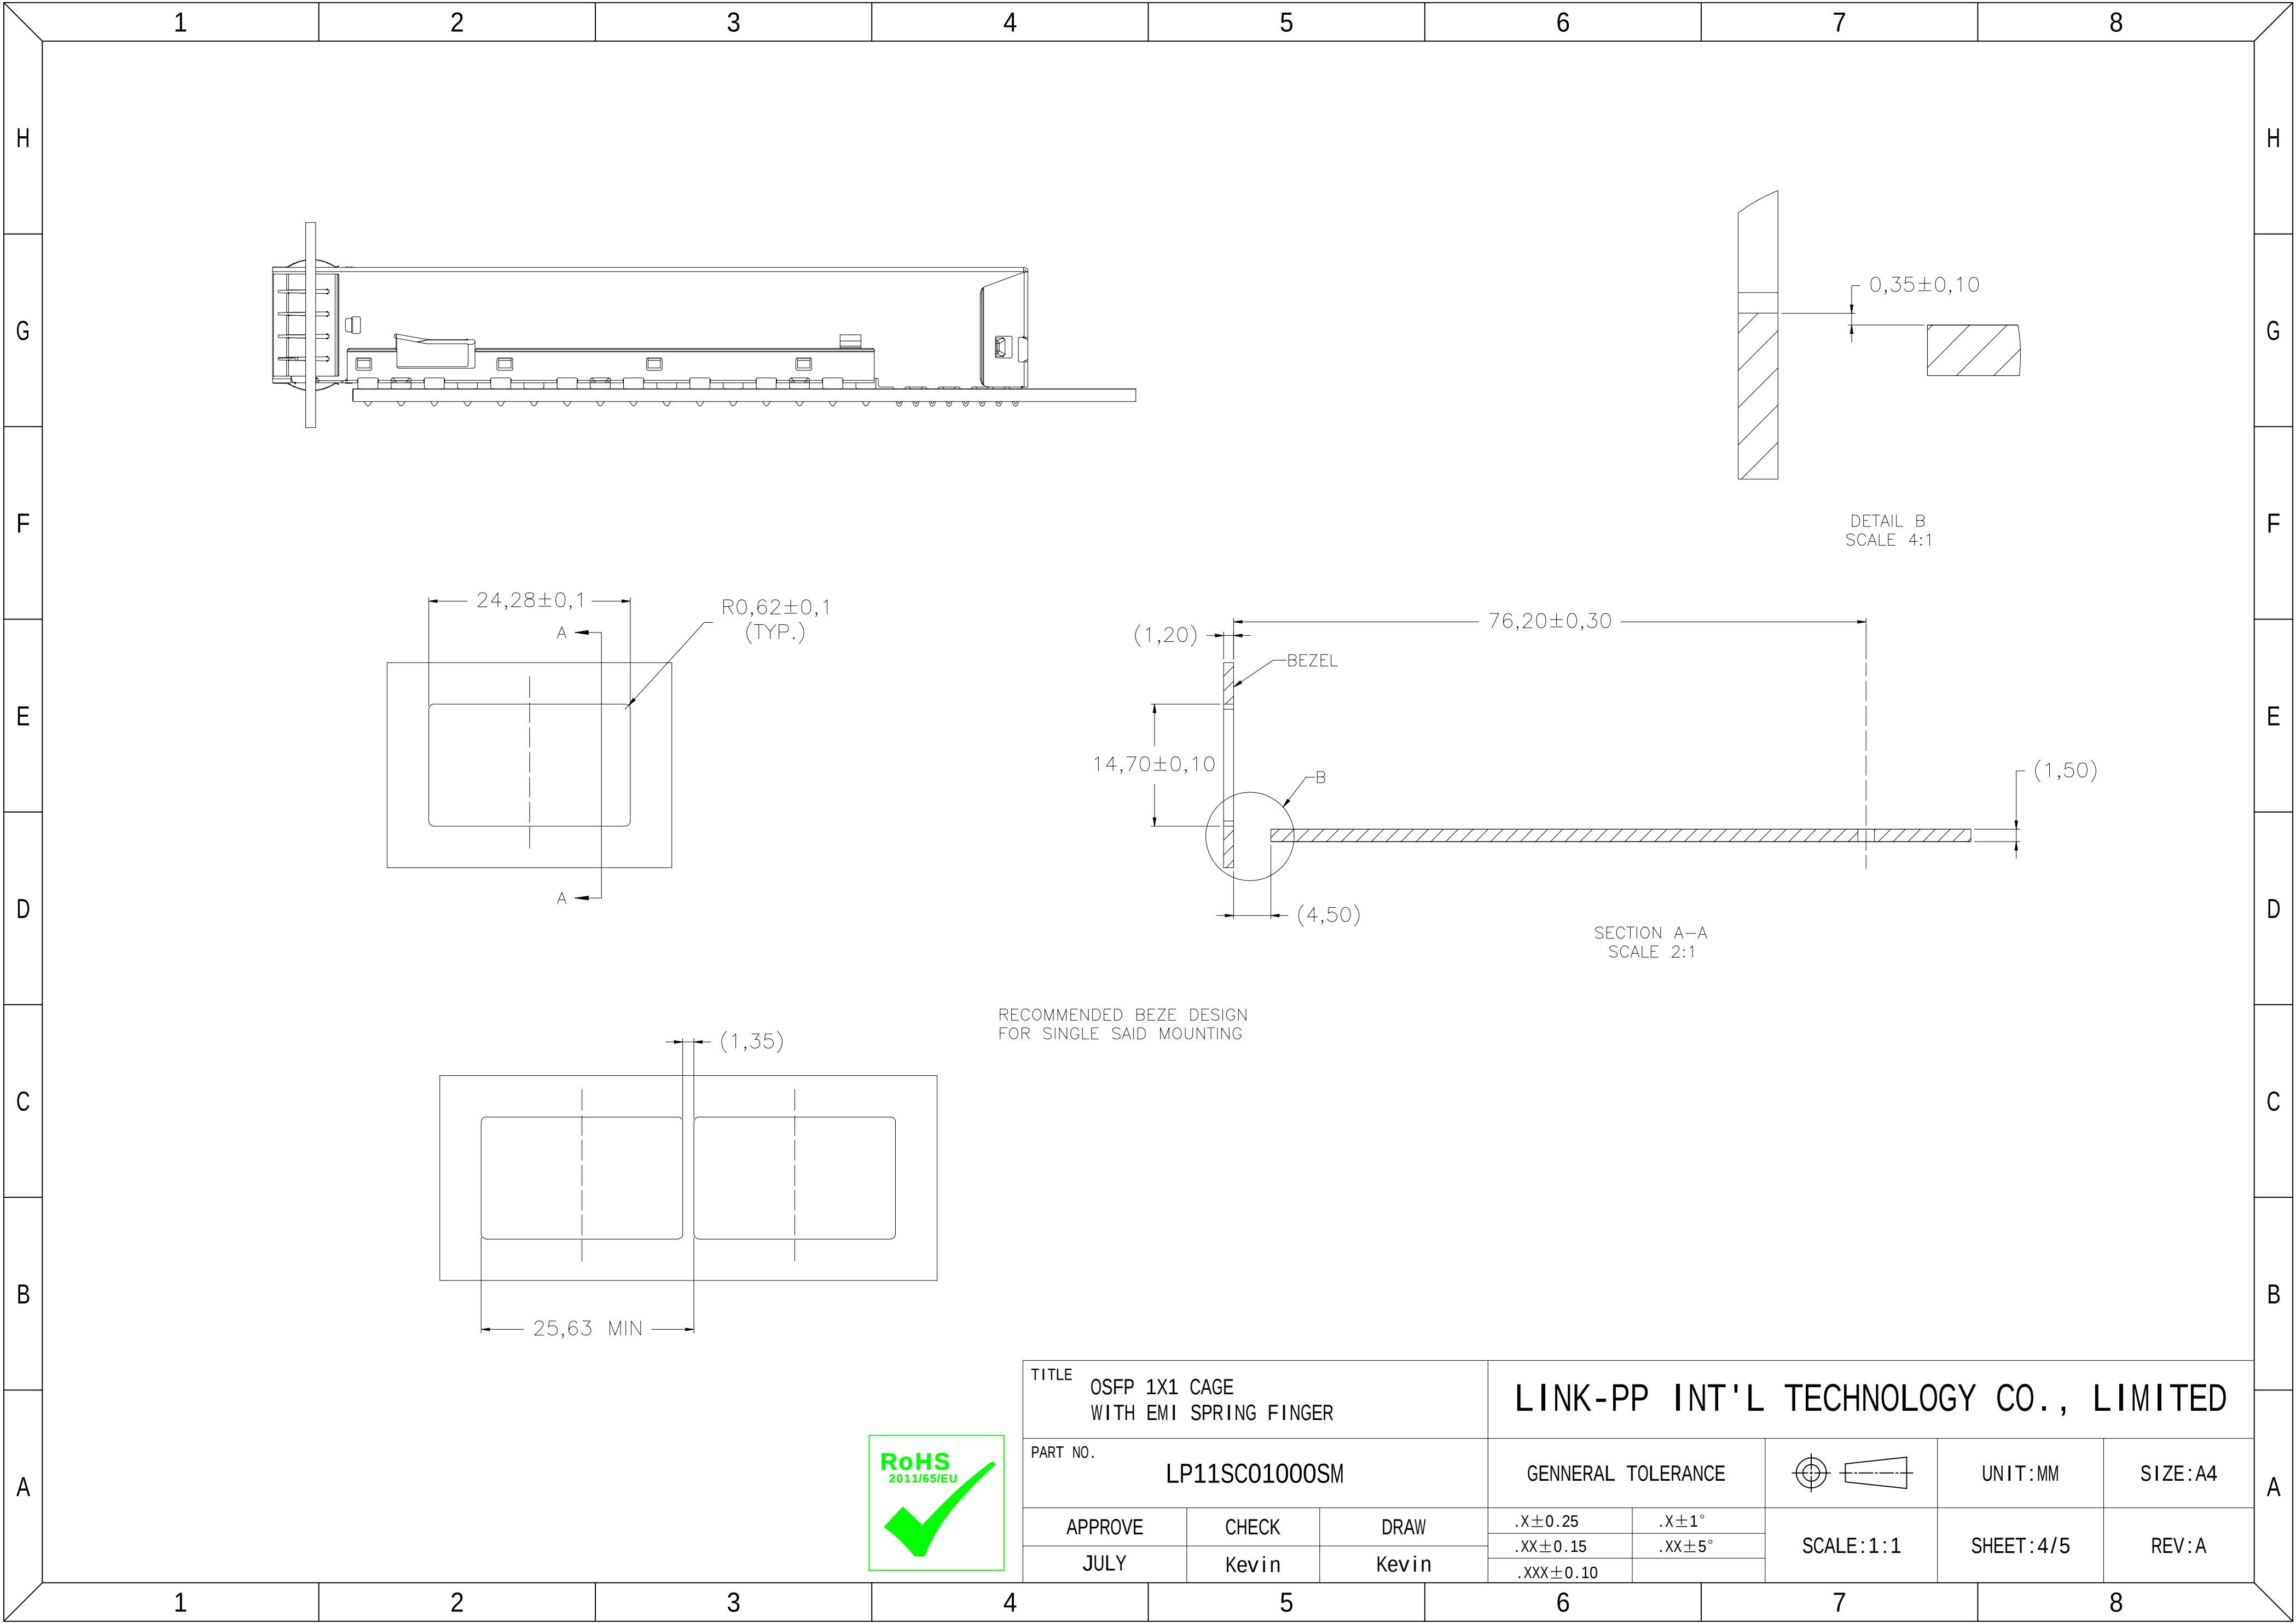

TITLE OSFP 1X1 CAGE WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED				
PART NO. LP11SC01000SM			GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE JULY	CHECK Kevin	DRAW Kevin	.X±0.25	.X±1°	SCALE:1:1	SHEET:4/5	REV:A
			.XX±0.15	.XX±5°			
			.XXX±0.10				

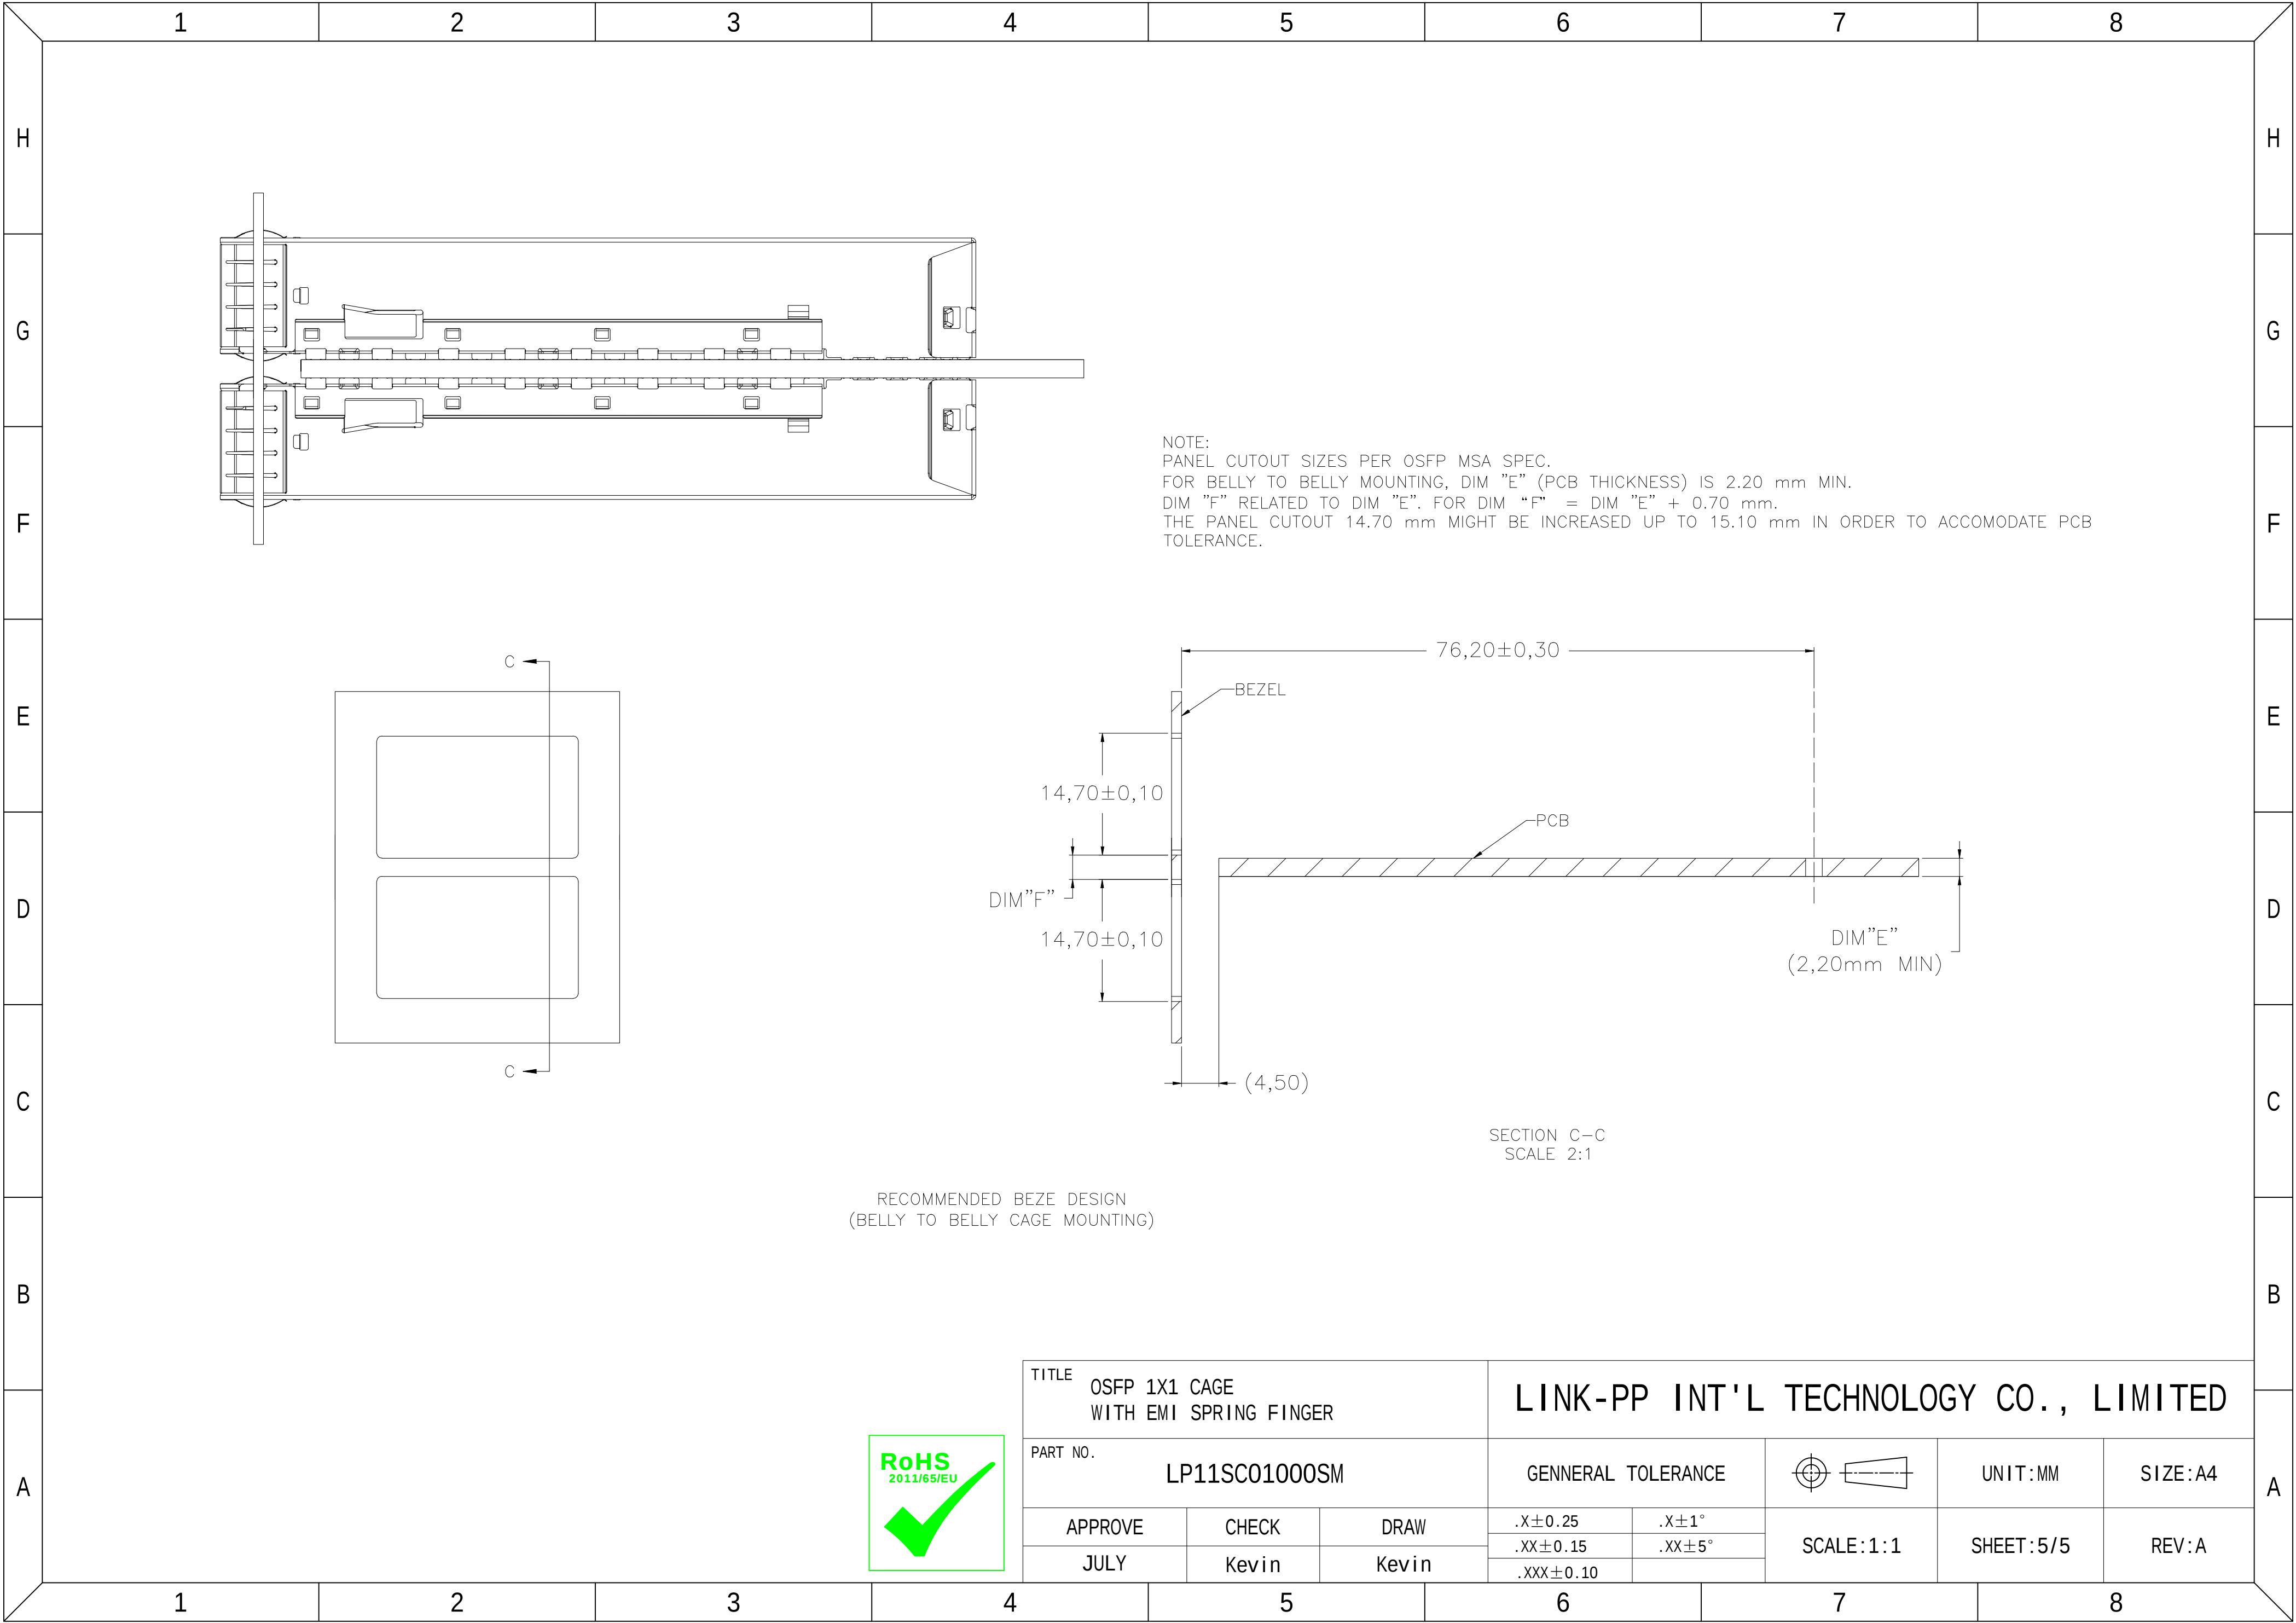

NOTE:
PANEL CUTOUT SIZES PER OSFP MSA SPEC.
FOR BELLY TO BELLY MOUNTING, DIM "E" (PCB THICKNESS) IS 2.20 mm MIN.
DIM "F" RELATED TO DIM "E". FOR DIM "F" = DIM "E" + 0.70 mm.
THE PANEL CUTOUT 14.70 mm MIGHT BE INCREASED UP TO 15.10 mm IN ORDER TO ACCOMODATE PCB TOLERANCE.

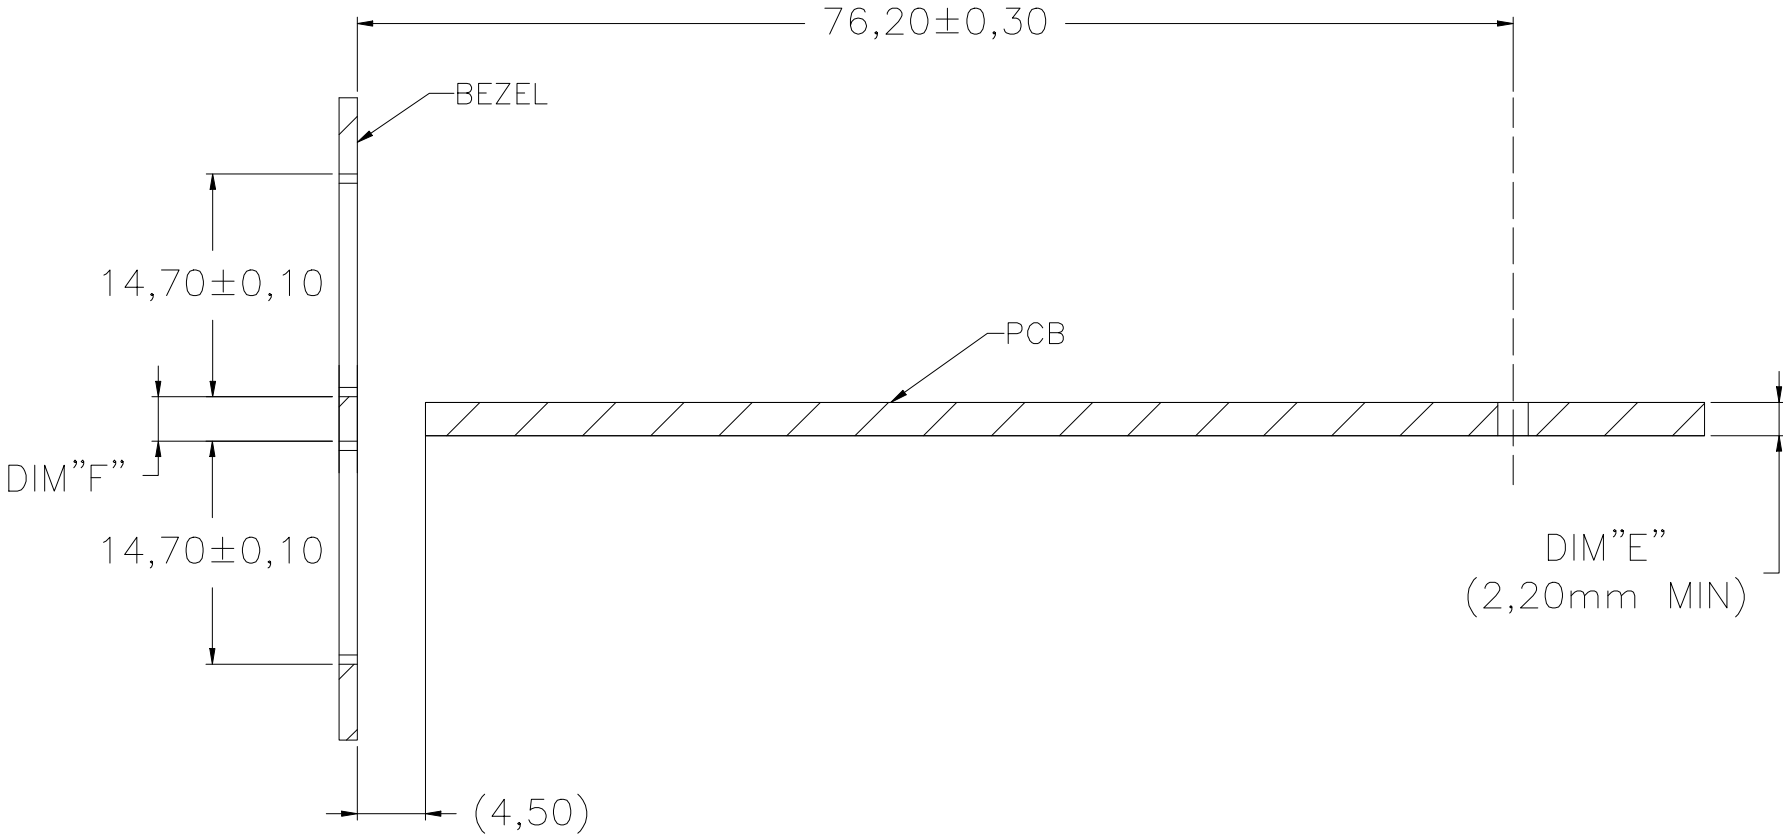

SECTION C-C
SCALE 2:1

RECOMMENDED BEZE DESIGN
(BELLY TO BELLY CAGE MOUNTING)



TITLE OSFP 1X1 CAGE WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP11SC01000SM			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:5/5
JULY	Kevin	Kevin	.XX±0.15	.XX±5°		
			.XXX±0.10			
						REV:A