


REV.	DESCRIPTION OF CHANGE	REVIEWED BY	ISSUE DATE
A	FIRST ISSUE	JULY	2024-01-27

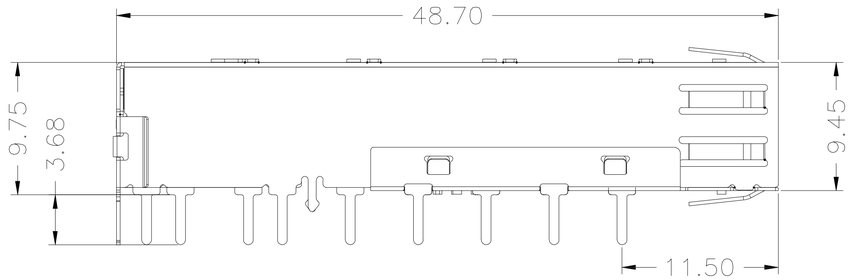

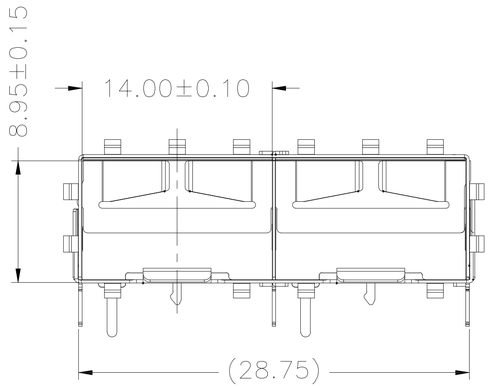

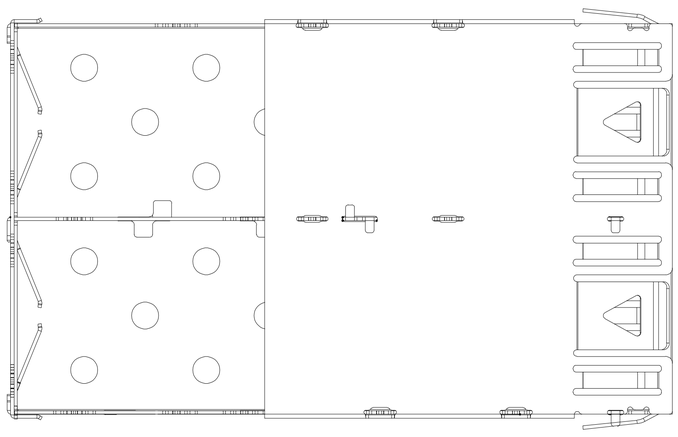

NOTES:


1.MATERIAL:
CAGE: COPPER ALLOY,NI PLATING,THICKNESS 0.25mm
MIDDLE CAGE: STAINLESS STEEL

2.PACKAGING: TRAY PACKAGING

3.TEMPERATURE RANGE:
OPERATING : −40°C TO +85°C
NON OPERATING : −55°C TO +105°C

RoHS 2011/65/EU


TITLE			LINK-PP INT'L TECHNOLOGY CO., LIMITED				
SFP 1X2 CAGE WITH EMI SPRING FINGER							
PART NO. LP12ACS1000			GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:1/3	REV:A
JULY	Kevin	Kevin	.XX±0.15	.XX±5°			
			.XXX±0.10				

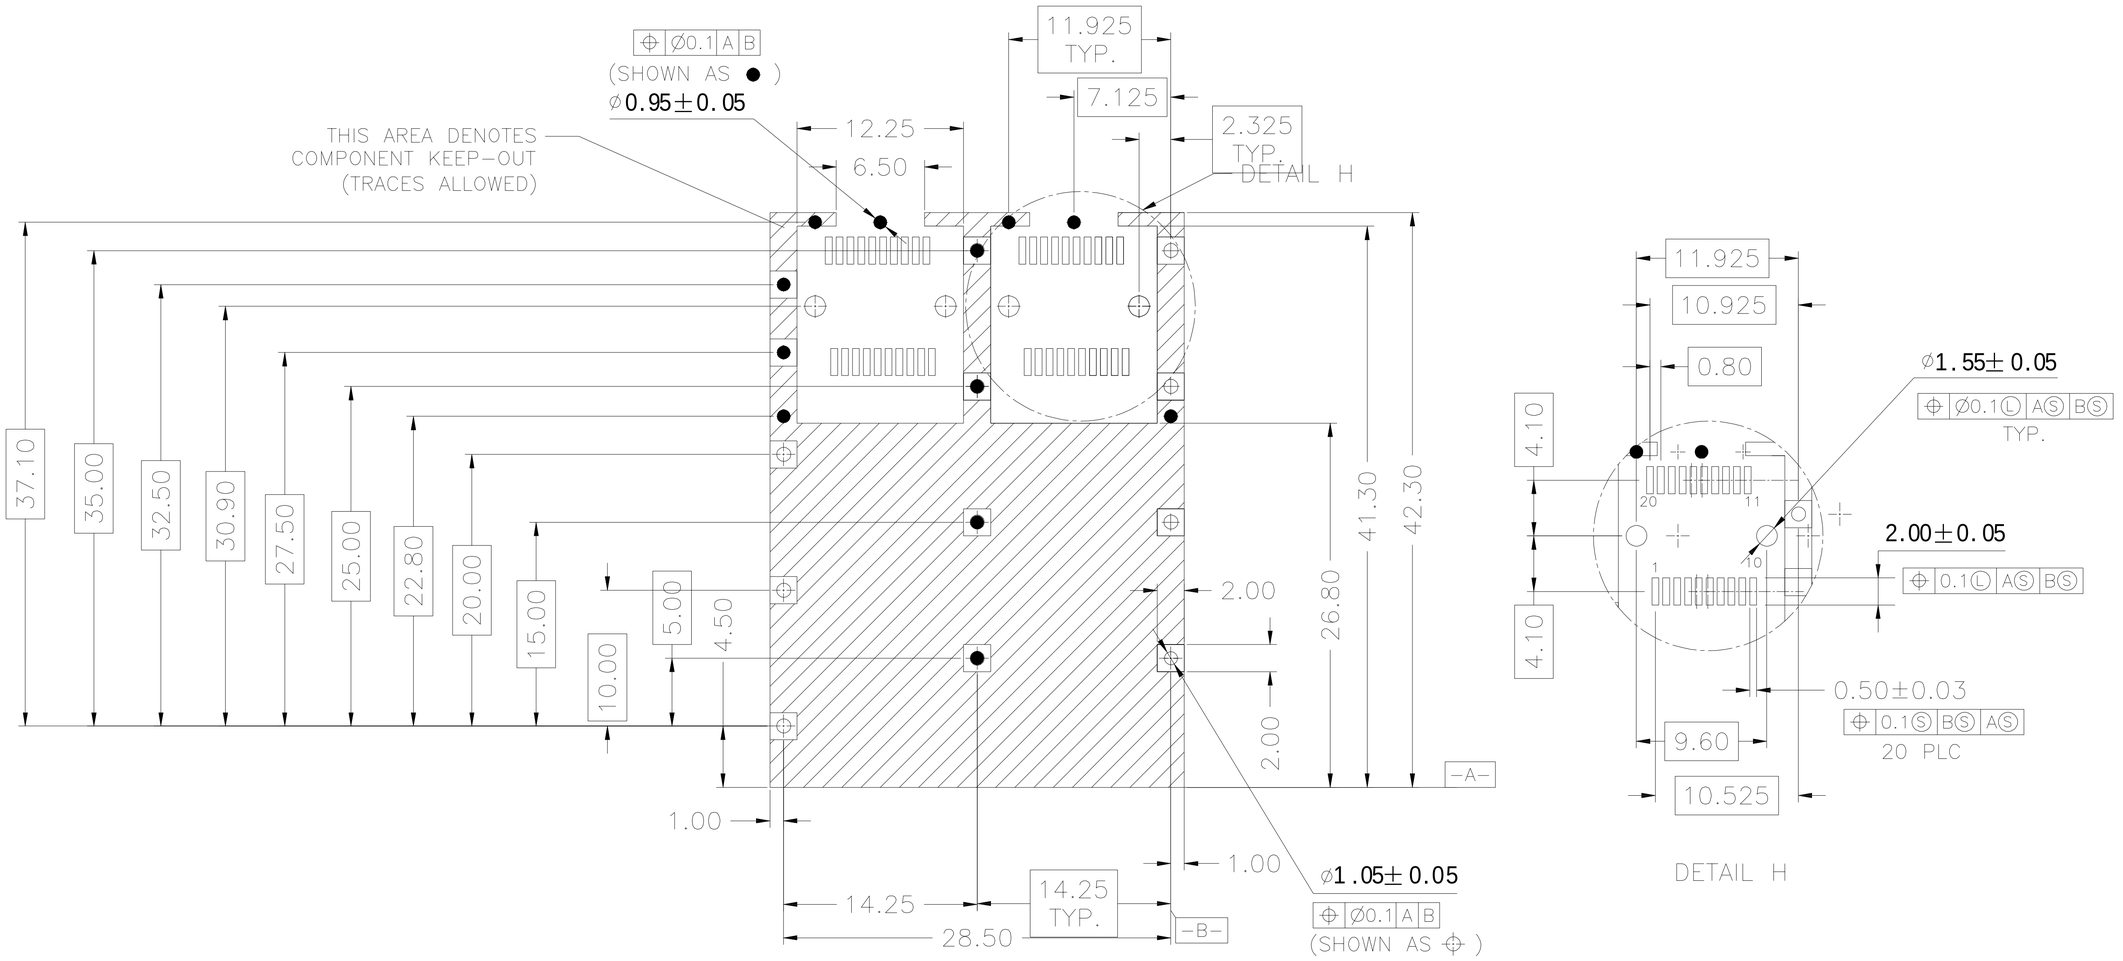


PCB LAYOUT
FOR SINGLE SIDE MOUNTING

RoHS
2011/65/EU

TITLE: SFP 1X2 CAGE WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED				
PART NO.: LP12ACS1000			GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:2/3	REV:A
JULY	Kevin	Kevin	.XX±0.15	.XX±5°			
			.XXX±0.10				

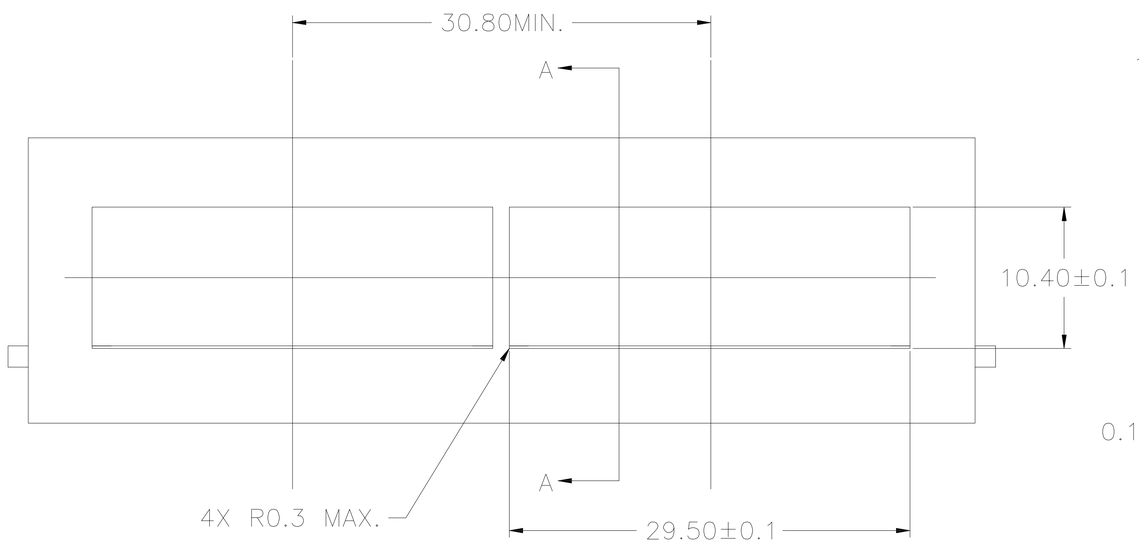

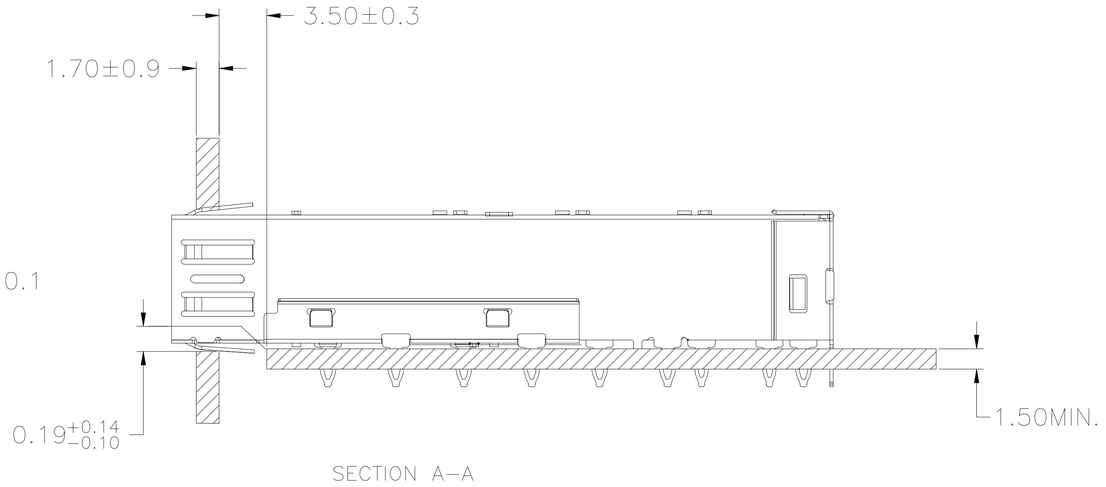

SECTION A–A

RECOMMENDED BEZEL DESIGN
SINGLE SIDED APPLICATIONS

RoHS
2011/65/EU

TITLE: SFP 1X2 CAGE WITH EMI SPRING FINGER			LINK-PP INT'L TECHNOLOGY CO., LIMITED				
PART NO.: LP12ACS1000			GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:3/3	REV:A
JULY	Kevin	Kevin	.XX±0.15	.XX±5°			
			.XXX±0.10				