


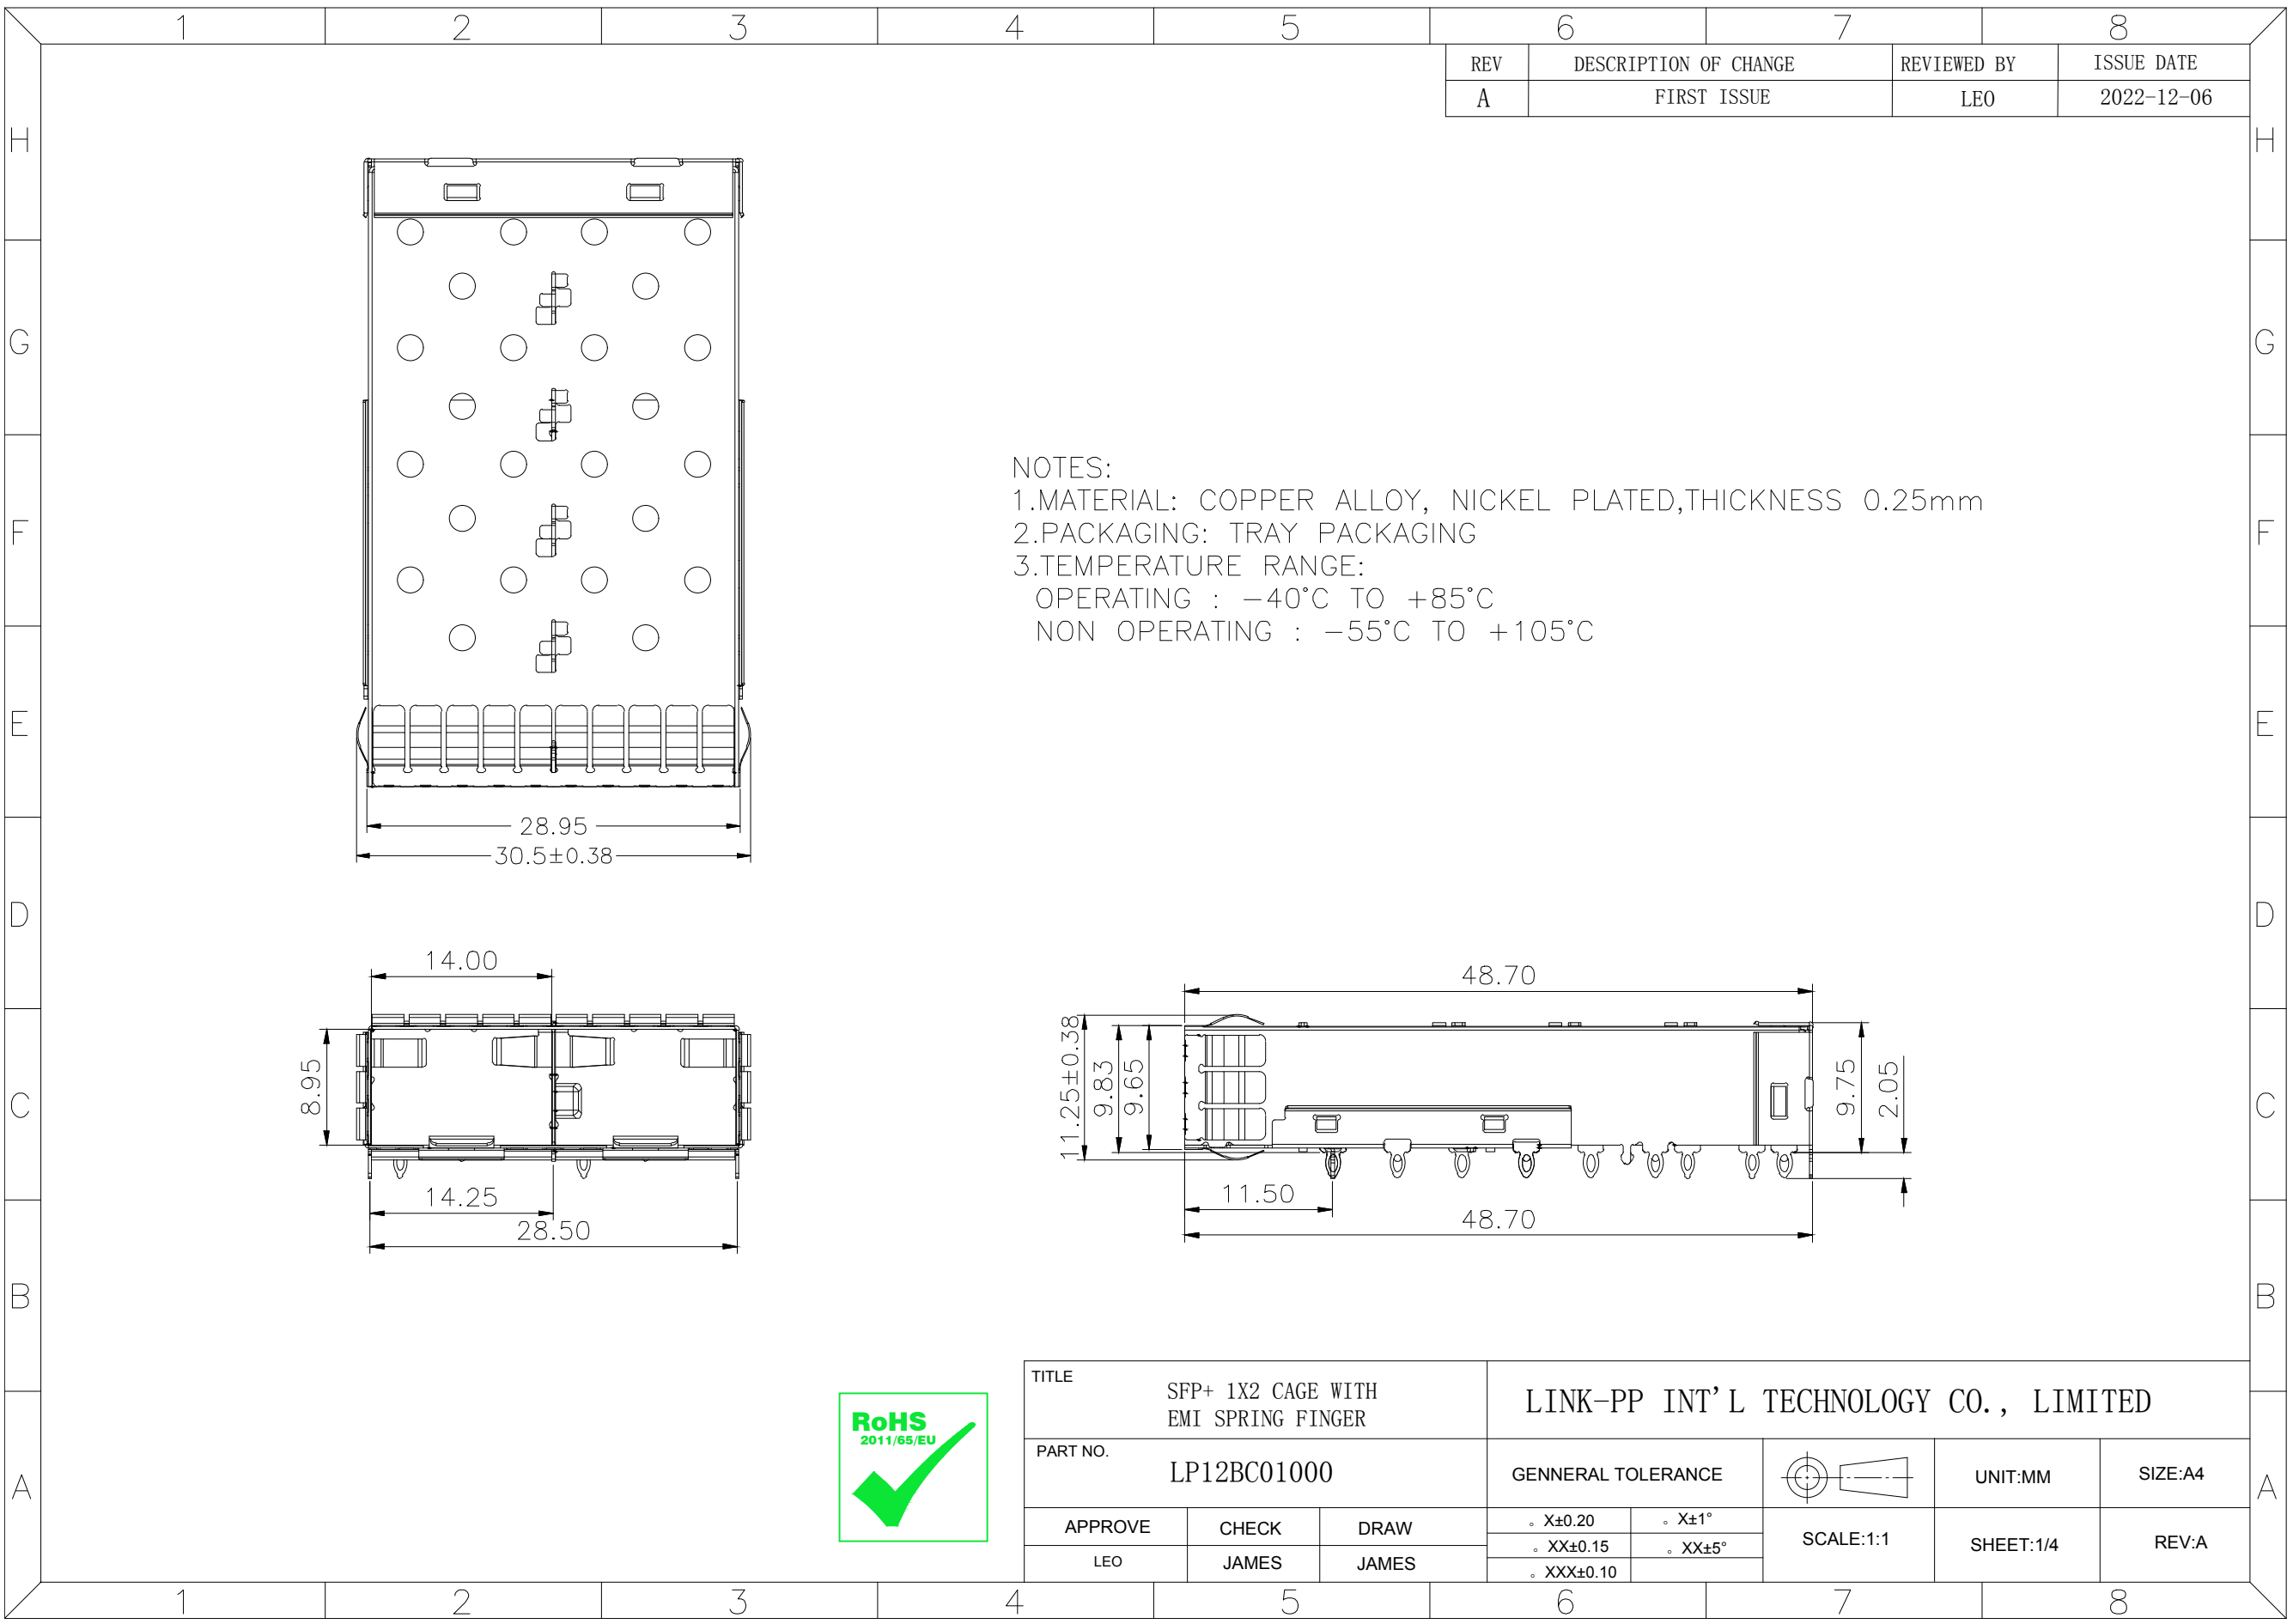

NOTES:

1.MATERIAL: COPPER ALLOY, NICKEL PLATED,THICKNESS 0.25mm

2.PACKAGING: TRAY PACKAGING


3.TEMPERATURE RANGE:

OPERATING : -40°C TO +85°C

NON OPERATING : -55°C TO +105°C




|          |       |       |                                       |        |  |           |         |
|----------|-------|-------|---------------------------------------|--------|--|-----------|---------|
| TITLE    |       |       | LINK-PP INT'L TECHNOLOGY CO., LIMITED |        |  |           |         |
| PART NO. |       |       | GENNERAL TOLERANCE                    |        |  | UNIT:MM   | SIZE:A4 |
| APPROVE  | CHECK | DRAW  | 。X±0.20                               | 。X±1°  |  | SCALE:1:1 | REV:A   |
| LEO      | JAMES | JAMES | 。XX±0.15                              | 。XX±5° |  |           |         |
|          |       |       | 。XXX±0.10                             |        |  | SHEET:1/4 |         |

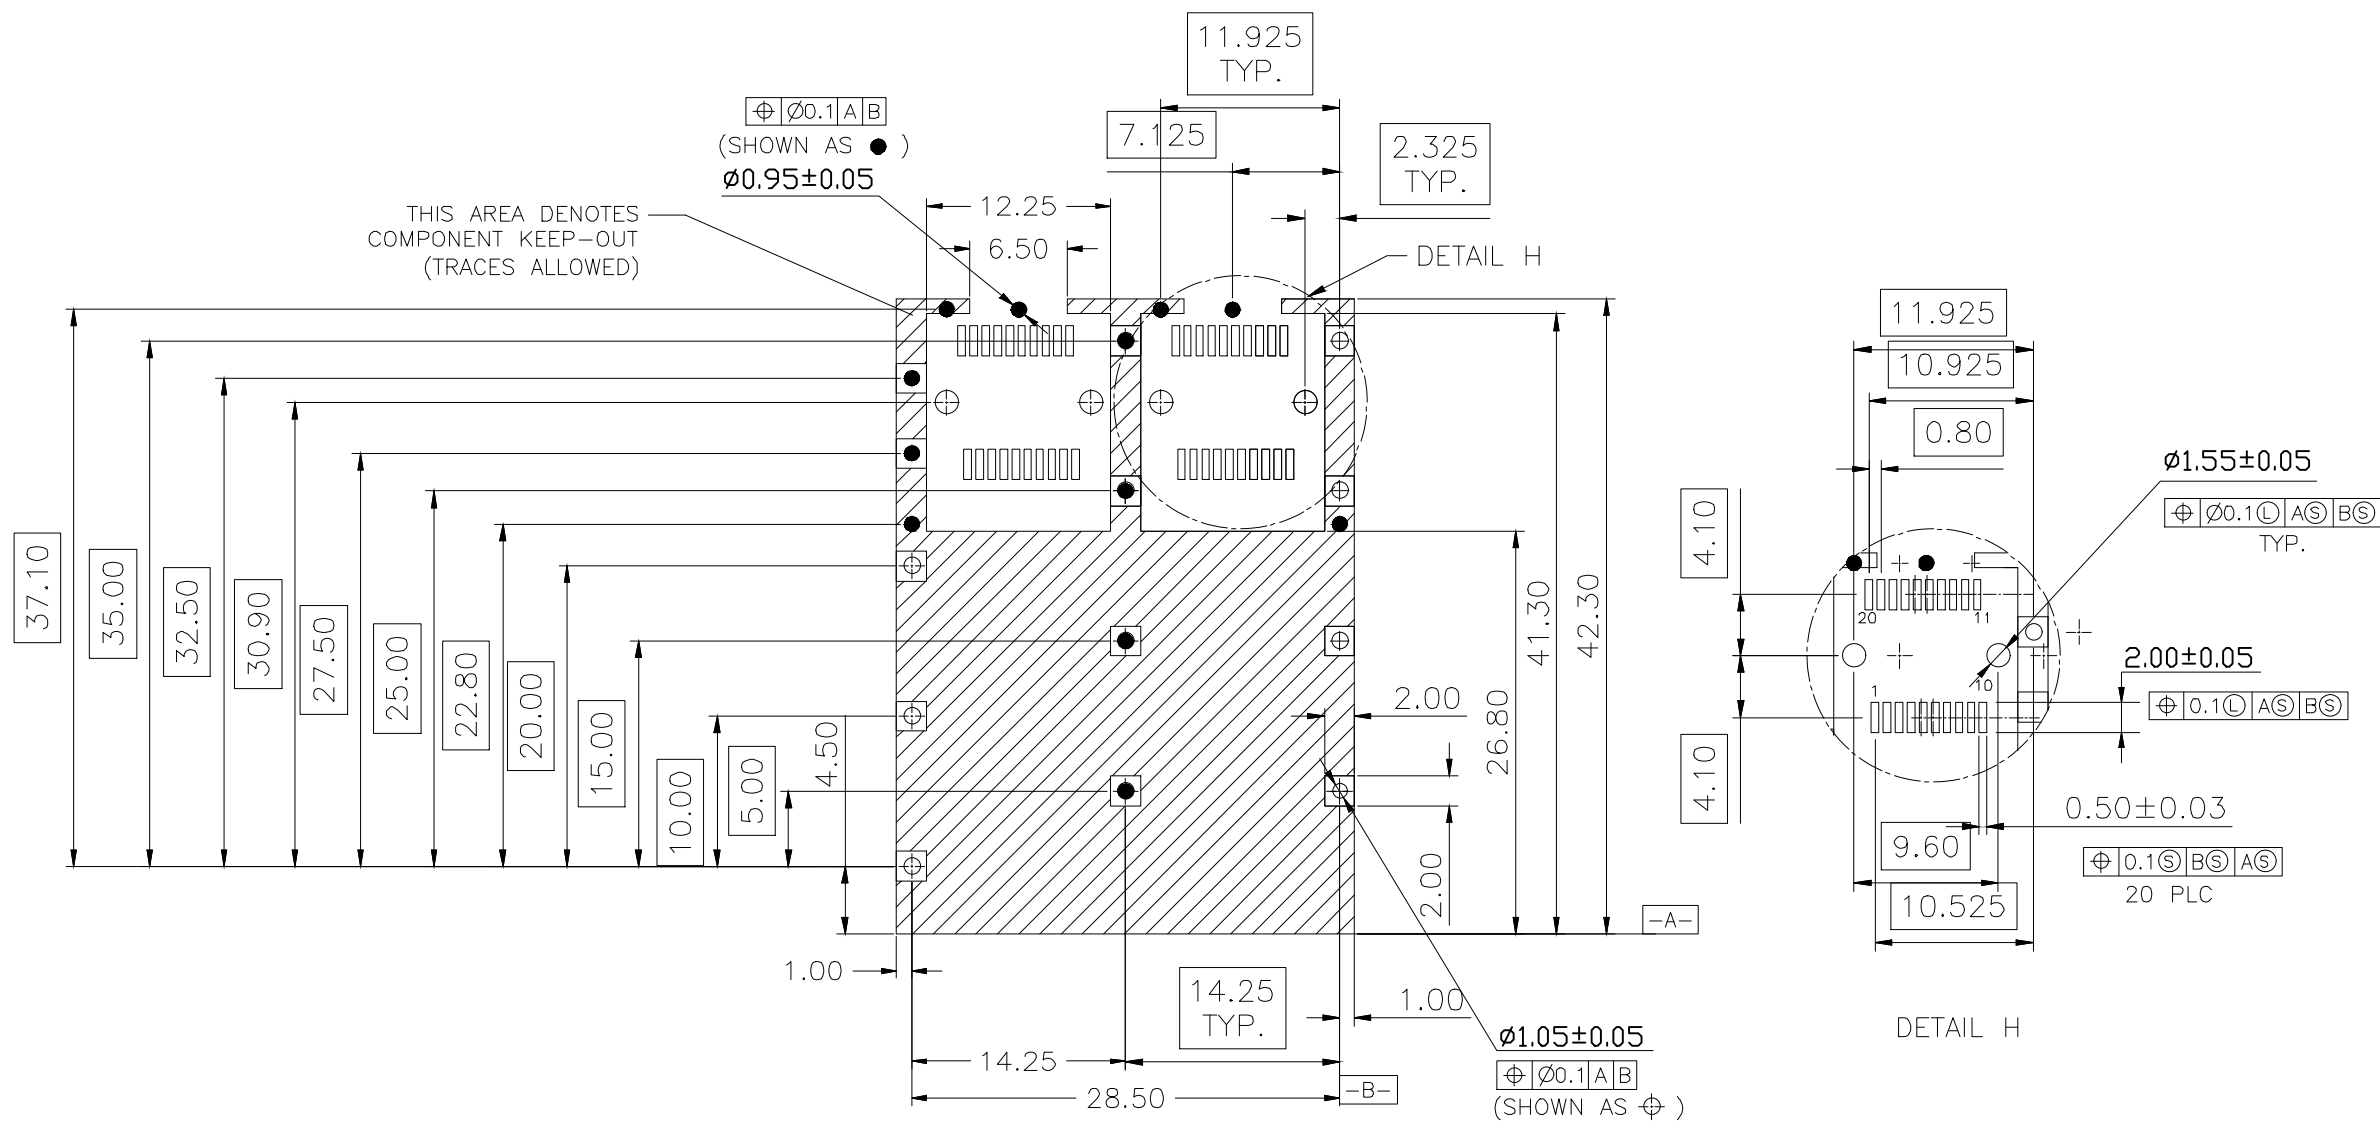

PCB LAYOUT  
FOR SINGLE SIDE MOUNTING





|                                                  |       |       |                                       |         |           |           |
|--------------------------------------------------|-------|-------|---------------------------------------|---------|-----------|-----------|
| TITLE<br>SFP+ 1X2 CAGE WITH<br>EMI SPRING FINGER |       |       | LINK-PP INT'L TECHNOLOGY CO., LIMITED |         |           |           |
| PART NO.<br>LP12BC01000                          |       |       | GENNERAL TOLERANCE                    |         | UNIT:MM   | SIZE:A4   |
| APPROVE                                          | CHECK | DRAW  | ° X±0.20                              | ° X±1°  | SCALE:1:1 | SHEET:2/4 |
| LEO                                              | JAMES | JAMES | ° XX±0.15                             | ° XX±5° |           |           |
|                                                  |       |       | ° XXX±0.10                            |         |           | REV:A     |

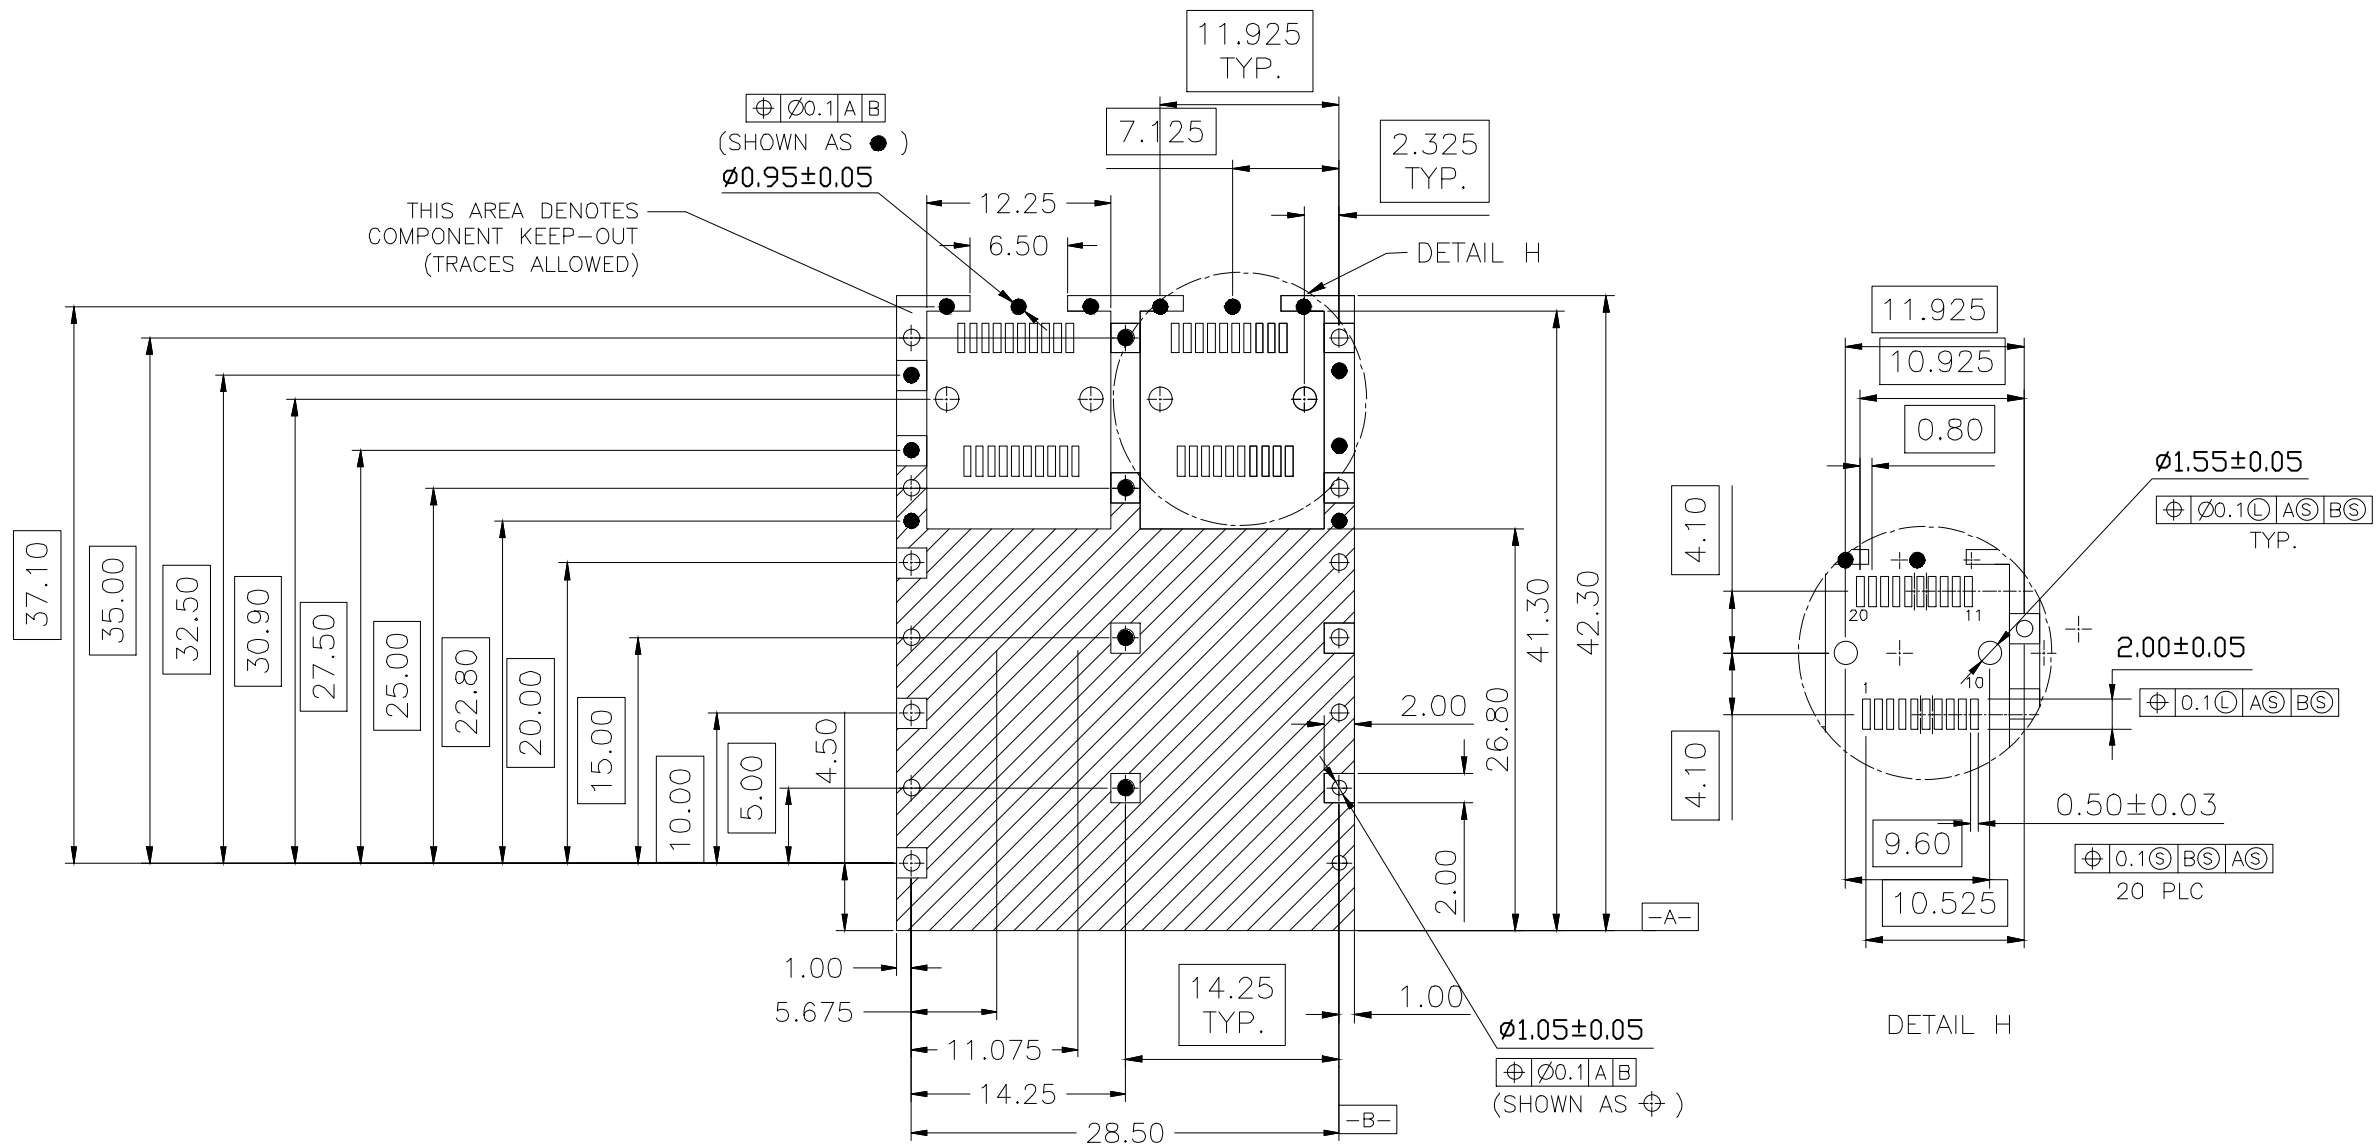

PCB LAYOUT  
FOR BELLY TO BELLY SIDE MOUNTING





|                                                  |       |       |                                       |         |           |           |
|--------------------------------------------------|-------|-------|---------------------------------------|---------|-----------|-----------|
| TITLE<br>SFP+ 1X2 CAGE WITH<br>EMI SPRING FINGER |       |       | LINK-PP INT'L TECHNOLOGY CO., LIMITED |         |           |           |
| PART NO.<br>LP12BC01000                          |       |       | GENNERAL TOLERANCE                    |         | UNIT:MM   | SIZE:A4   |
| APPROVE                                          | CHECK | DRAW  | 。 X±0.20                              | 。 X±1°  | SCALE:1:1 | SHEET:3/4 |
| LEO                                              | JAMES | JAMES | 。 XX±0.15                             | 。 XX±5° |           |           |
|                                                  |       |       | 。 XXX±0.10                            |         |           | REV:A     |

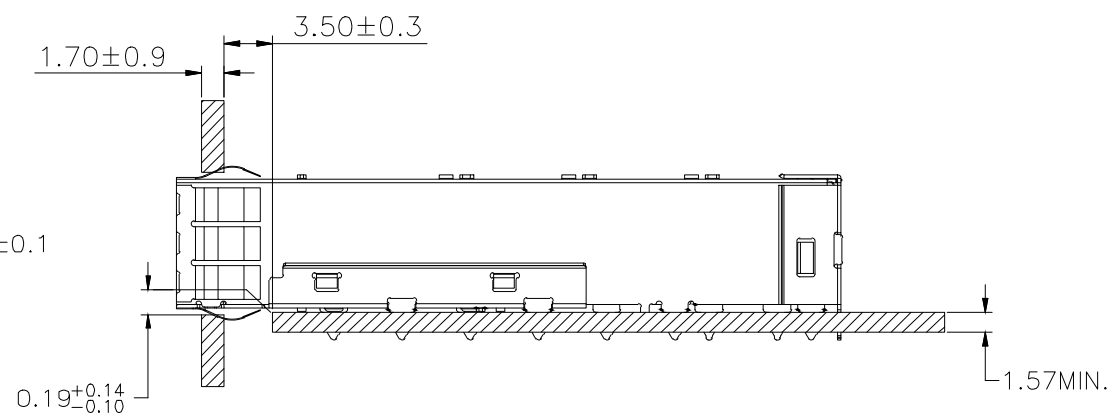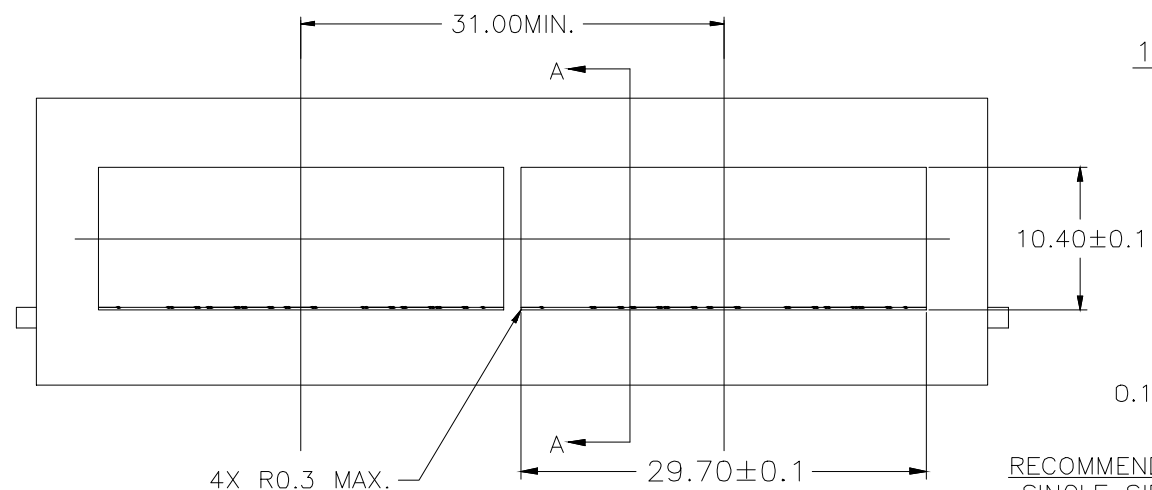

SECTION A-A

RECOMMENDED BEZEL DESIGN  
SINGLE SIDED APPLICATIONS

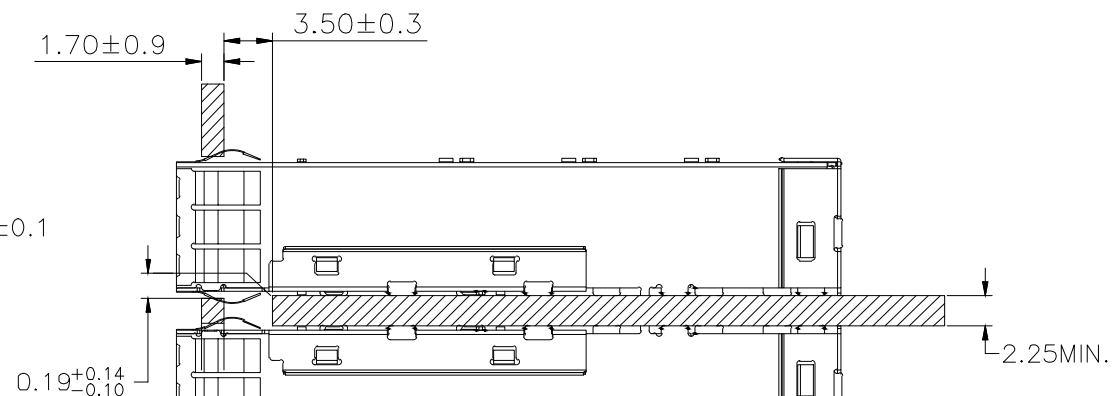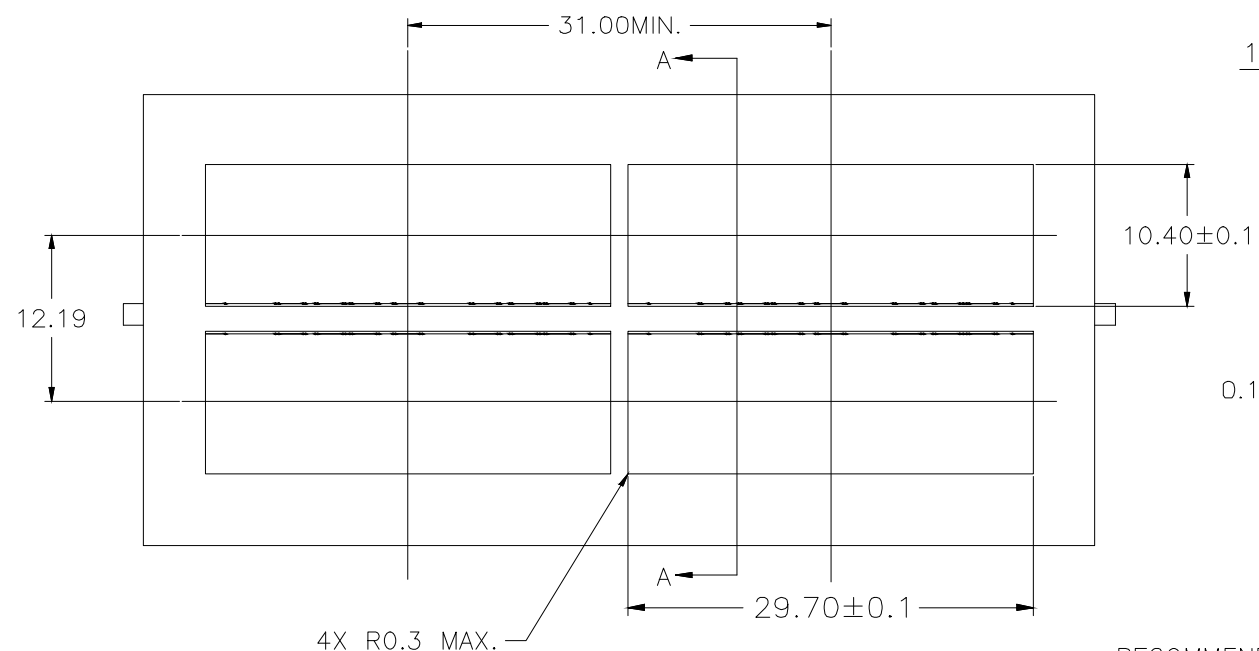

SECTION A-A

RECOMMENDED BEZEL DESIGN  
BELLY TO BELLY APPLICATIONS



|          |  |  |                                       |         |           |         |
|----------|--|--|---------------------------------------|---------|-----------|---------|
| TITLE    |  |  | LINK-PP INT'L TECHNOLOGY CO., LIMITED |         |           |         |
| PART NO. |  |  | GENNERAL TOLERANCE                    |         | UNIT:MM   | SIZE:A4 |
| APPROVE  |  |  | ° X±0.20                              | ° X±1°  | SCALE:1:1 | REV:A   |
| LEO      |  |  | ° XX±0.15                             | ° XX±5° |           |         |
| CHECK    |  |  | ° XXX±0.10                            |         |           |         |
| DRAW     |  |  |                                       |         | SHEET:4/4 |         |
| JAMES    |  |  |                                       |         |           |         |