


REV	DESCRIPTION OF CHANGE	REVIEWED BY	ISSUE DATE
A	FIRST ISSUE	LEO	2020-04-01

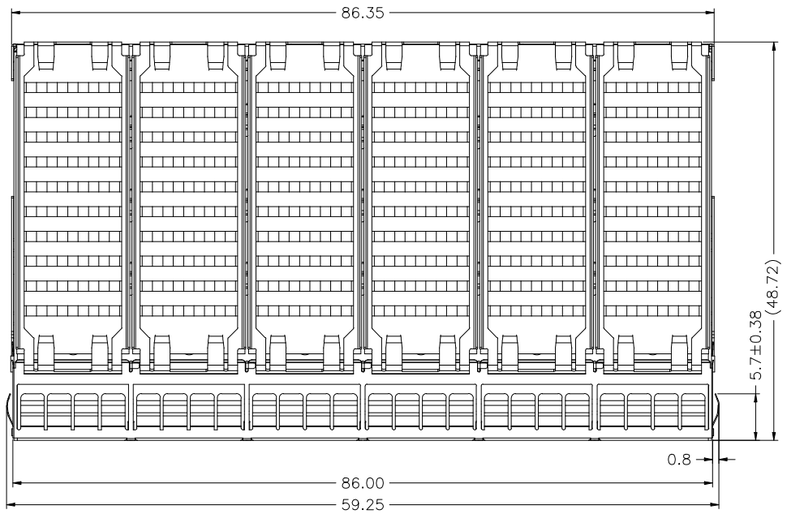

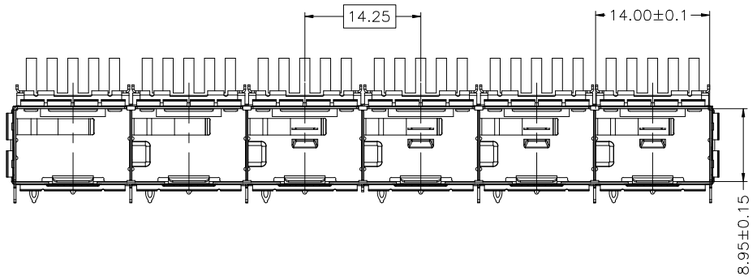

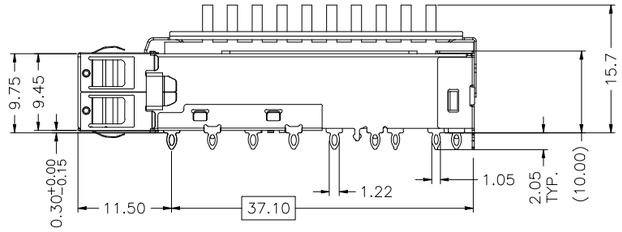

NOTES:
1.MATERIAL:
CAGE:COPPER ALLOY, THICKNESS 0.25mm
HEATSINK:ALUMINNUM
CLIP: STAINLESS STEEL
2.PACKAGING: TRAY PACKAGING
3.TEMPERATURE RANGE:
OPERATING : −40°C TO +85°C
NON OPERATING : −55°C TO +105°C


RoHS 2011/65/EU

TITLE	SFP+ 1X6 CAGE WITH EMI SPRING FINGER HEAT SINK	LINK-PP INT'L TECHNOLOGY CO., LIMITED
PART NO.	LP16BC010Q0S	GENNERAL TOLERANCE


APPROVE	CHECK	DRAW
LEO	JAMES	JAMES

◦ X±0.20	◦ X±1°
◦ XX±0.15	◦ XX±5°
◦ XXX±0.10	

UNIT:MM	SIZE:A4
SCALE:1:1	SHEET:1/4
	REV:A

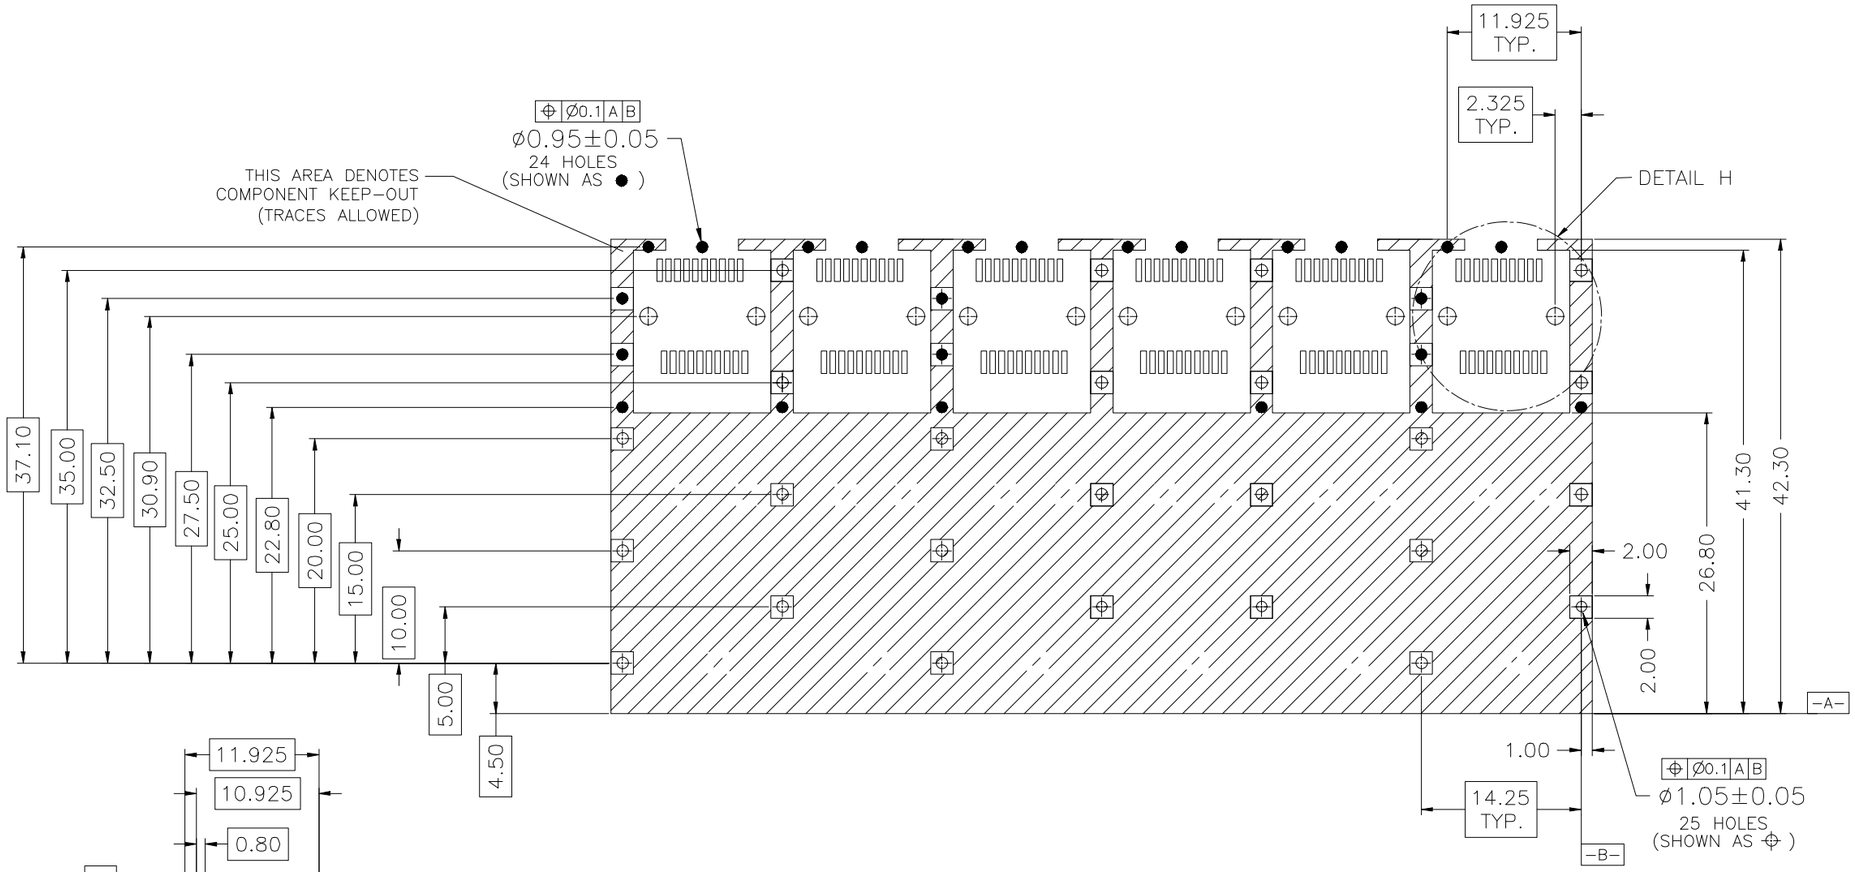


PCB LAYOUT
FOR SINGLE SIDE MOUNTING

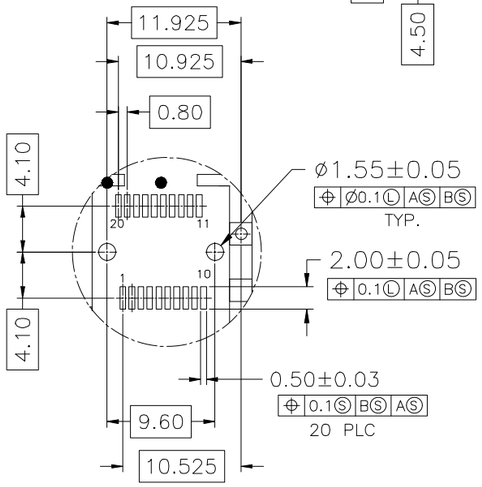


DETAIL H

RoHS
2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER HEAT SINK			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP16BC010Q0S			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:2/4 REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°		
			◦ XXX±0.10			

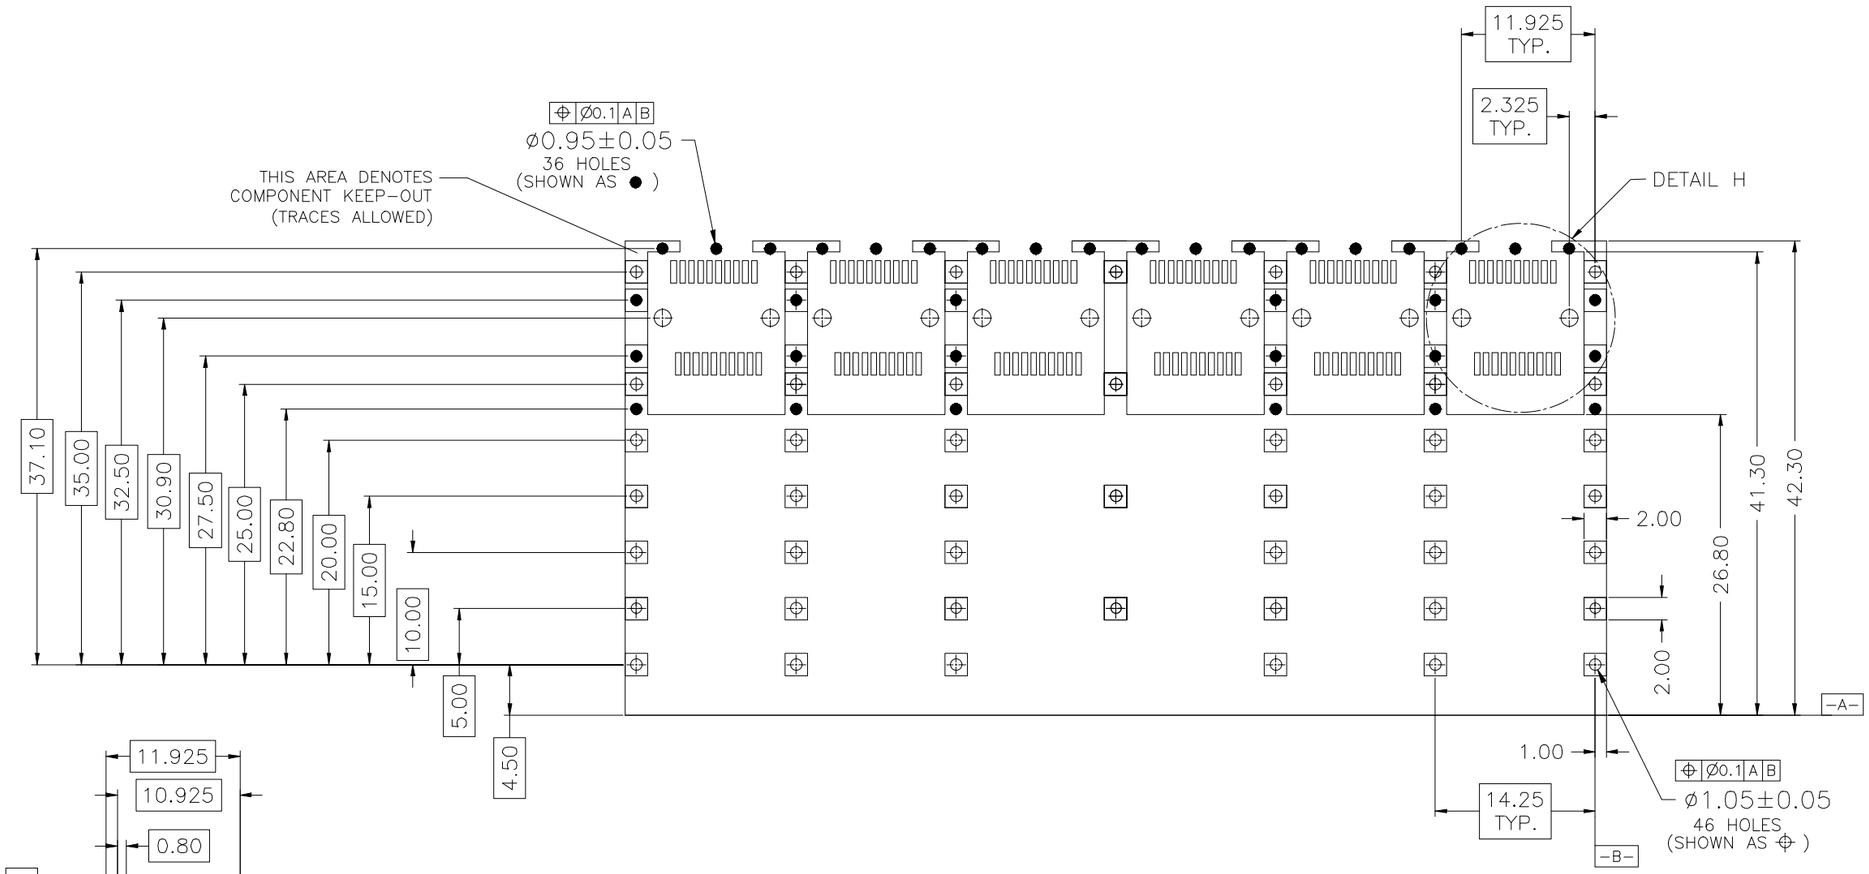

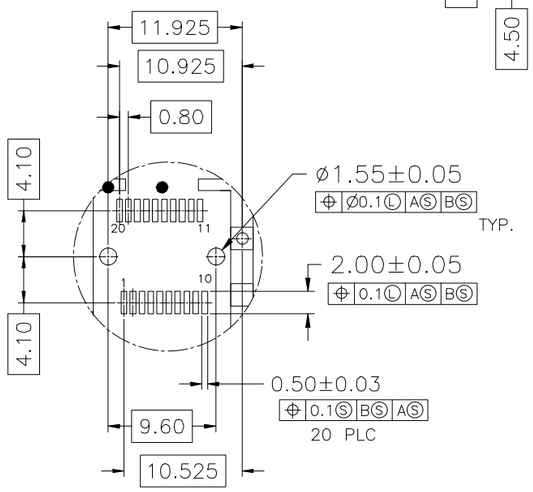



DETAIL H

PCB LAYOUT
FOR BELLY TO BELLY MOUNTING

RoHS
2011/65/EU


TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER HEAT SINK			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP16BC010Q0S			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:3/4	REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°			
			◦ XXX±0.10			

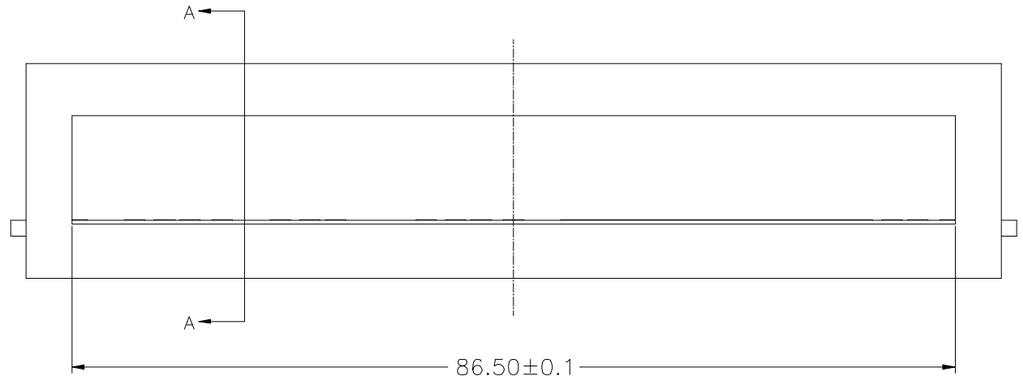


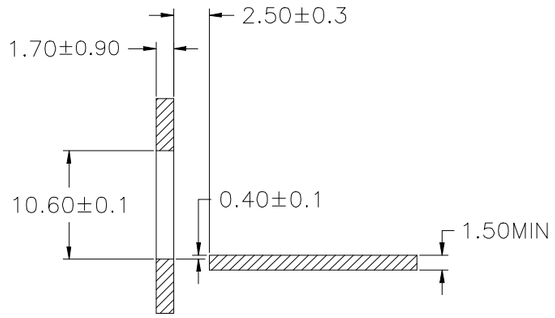

SECTION A–A

MOUNTED ON PC BOARD
SHOWN THRU RECOMMENDED BEZEL

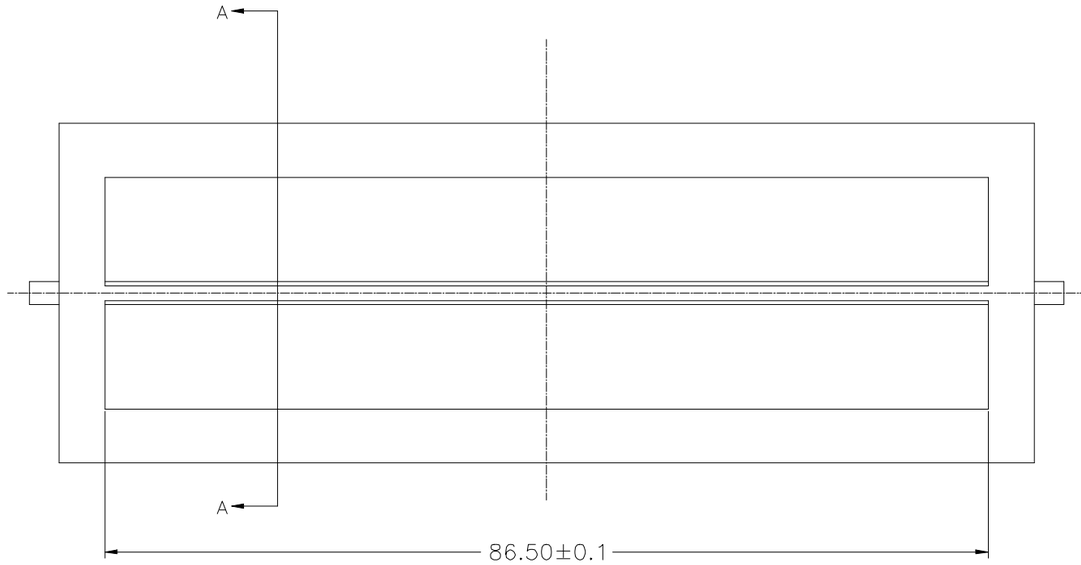

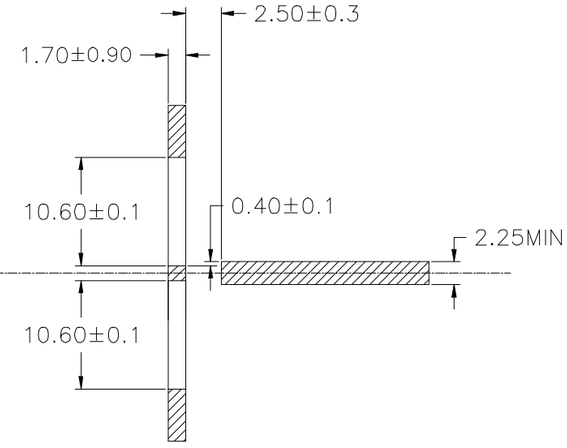

SECTION A–A

MOUNTED BELLY TO BELLY ON PC BOARD
SHOWN THRU RECOMMENDED BEZEL

RoHS
2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER HEAT SINK			LINK-PP INT'L TECHNOLOGY CO., LIMITED				
PART NO.: LP16BC010Q0S			GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:4/4	REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°			
			◦ XXX±0.10				