
REV	DESCRIPTION OF CHANGE	REVIEWED BY	ISSUE DATE
A	FIRST ISSUE	LEO	2023-03-18

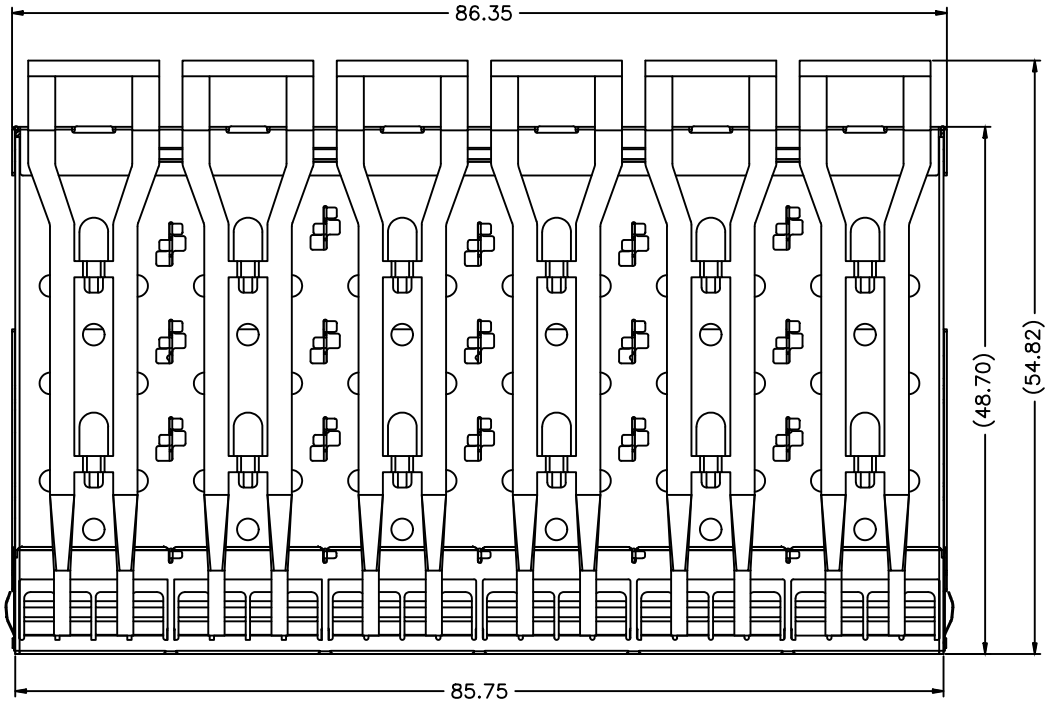



NOTES:

1.MATERIAL: COPPER ALLOY, THICKNESS 0.25mm

2.PACKAGING: TRAY PACKAGING


3.TEMPERATURE:
OPERATION : −40°C TO +85°C
STORAGE : −55°C TO +105°C

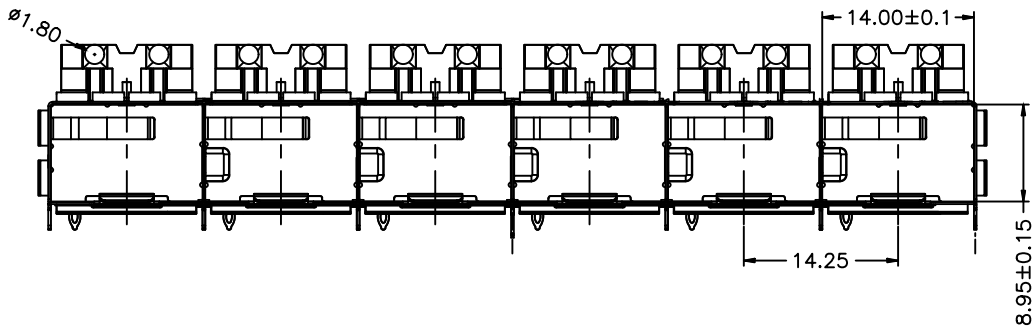

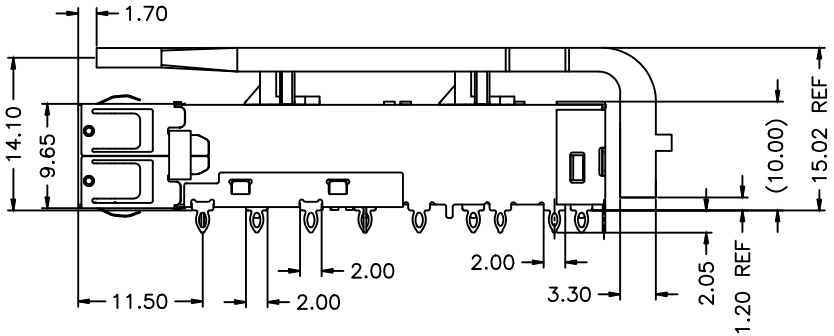


RoHS 2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP16BC01300			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:1/4 REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°		
			◦ XXX±0.10			

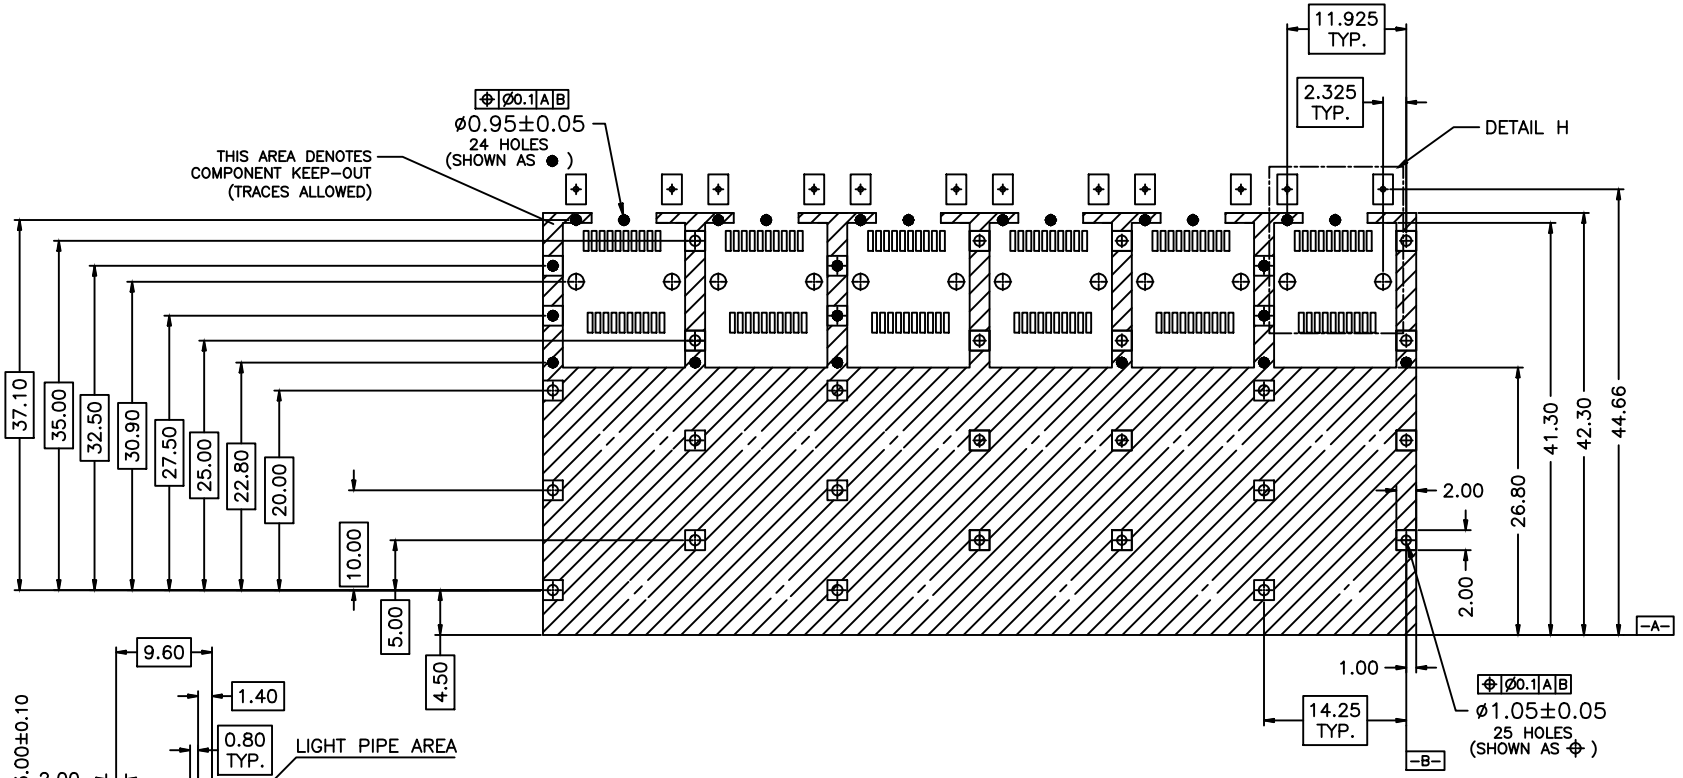


PCB LAYOUT
FOR SINGLE SIDE MOUNTING

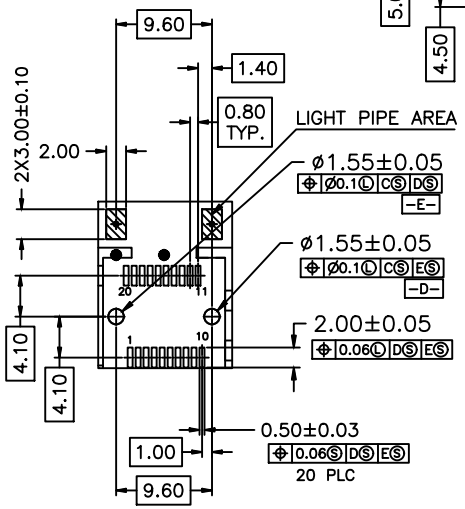


DETAIL H
RECOMMENDED CONNECTOR LAYOUT

RoHS 2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP16BC01300			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:2/4 REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°		
			◦ XXX±0.10			

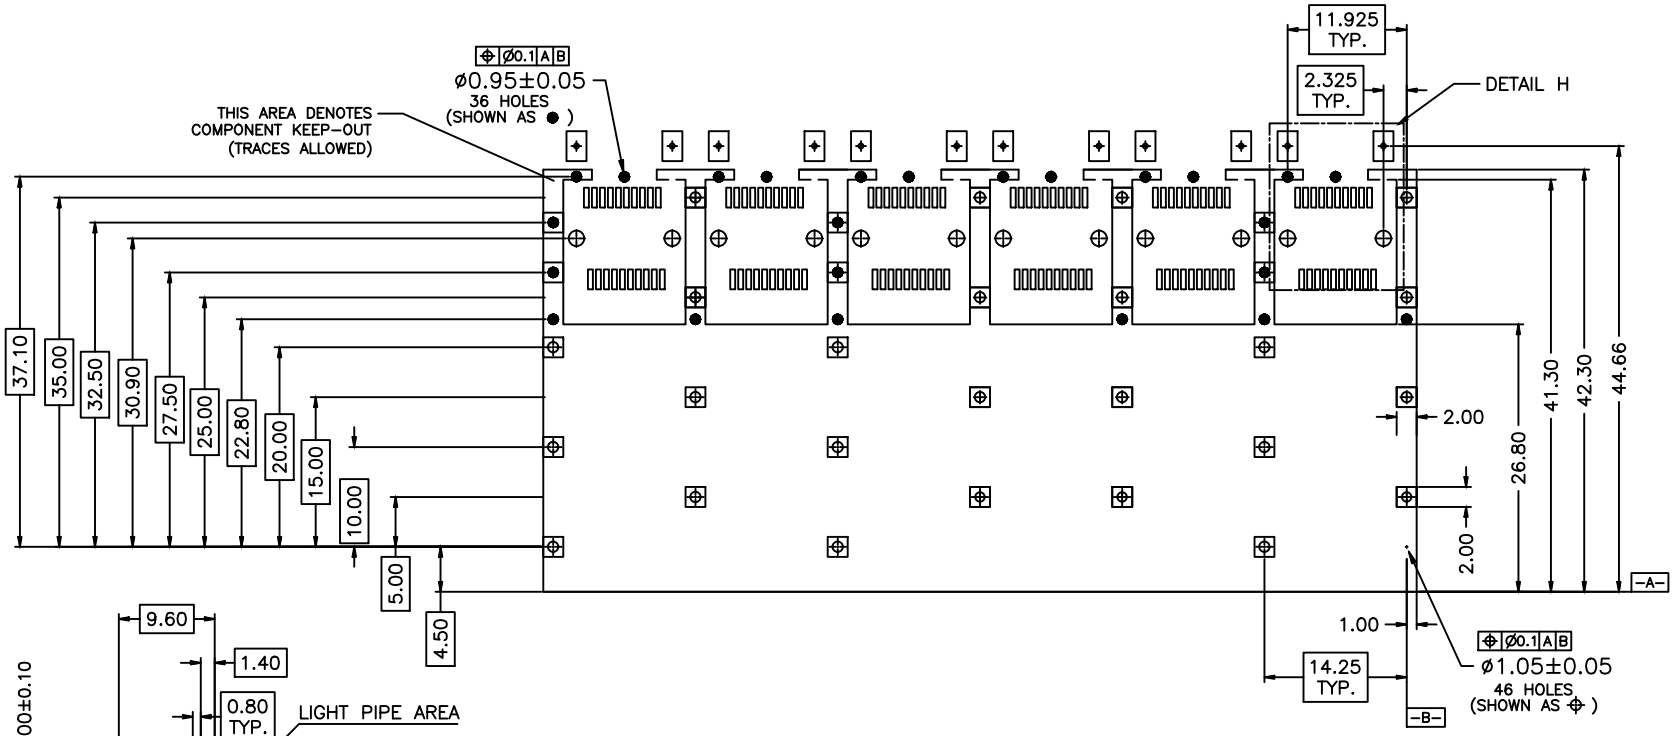


PCB LAYOUT
FOR BELLY TO BELLY MOUNTING

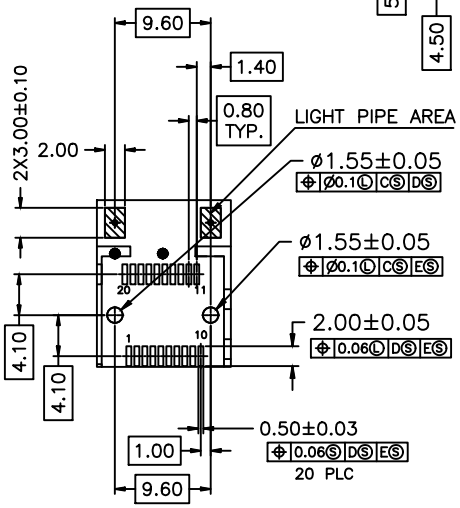


DETAIL H
RECOMMENDED CONNECTOR LAYOUT

RoHS 2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP16BC01300			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:3/4 REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°		
			◦ XXX±0.10			

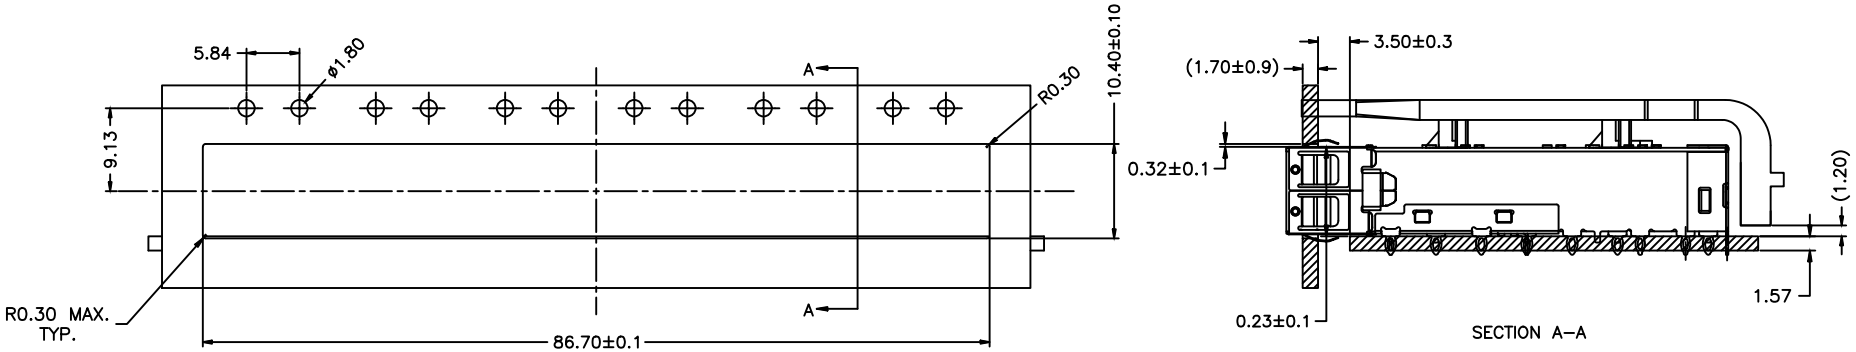

RECOMMENDED BEZEL DESIGN
SINGLE SIDED APPLICATIONS

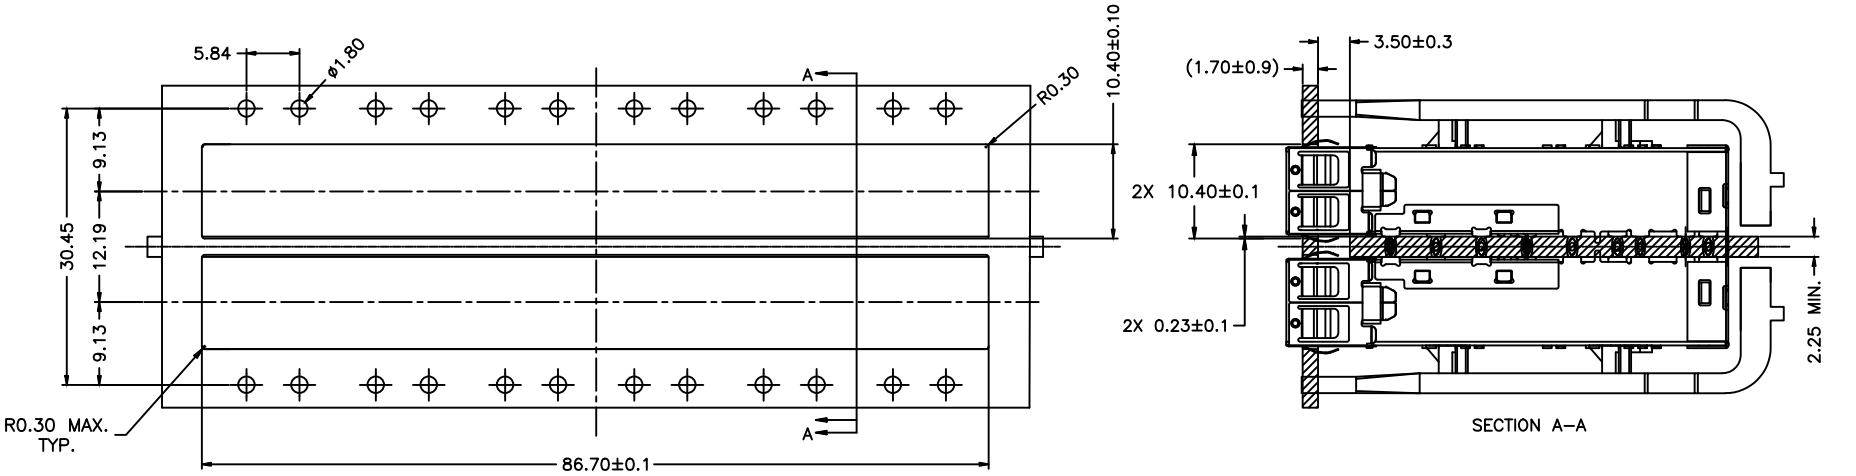

RECOMMENDED BEZEL DESIGN
BELLY TO BELLY APPLICATIONS

RoHS 2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP16BC01300			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:4/4	REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°			
			◦ XXX±0.10				