



REV.	DESCRIPTION OF CHANGE	REVIEWED BY	ISSUE DATE
A	FIRST ISSUE	LEO	2023-01-12

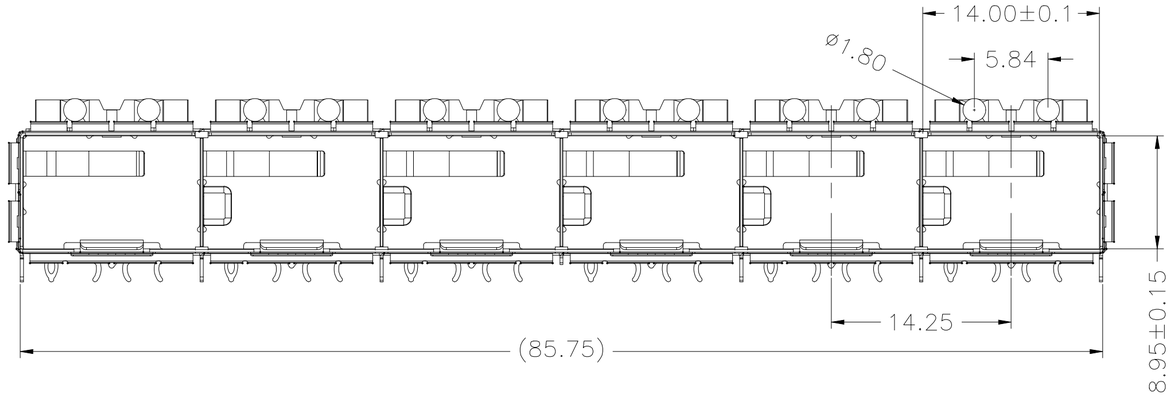

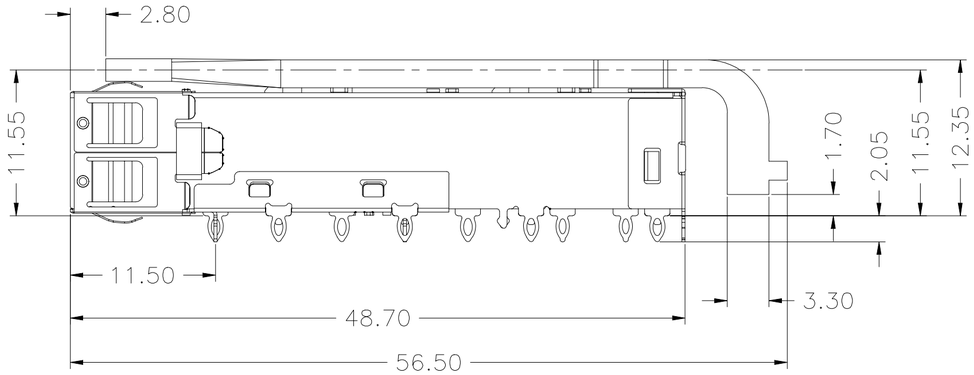

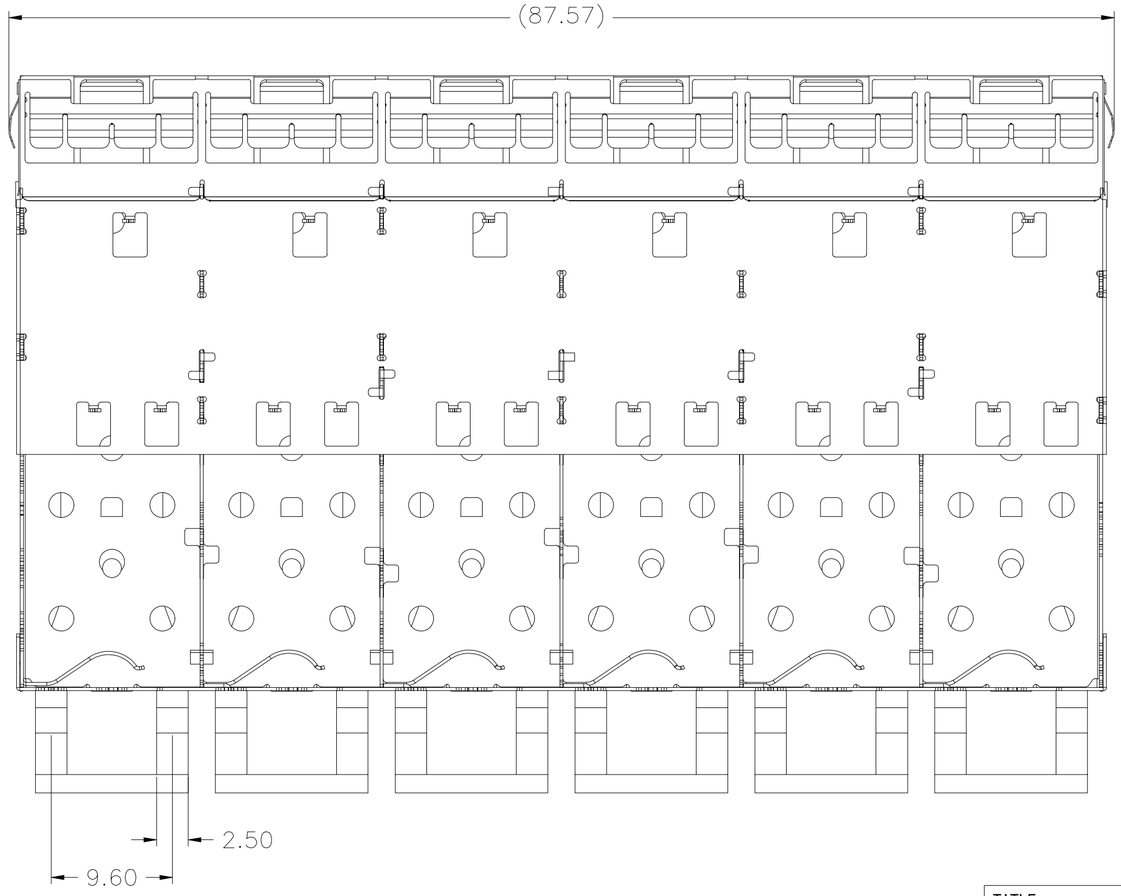


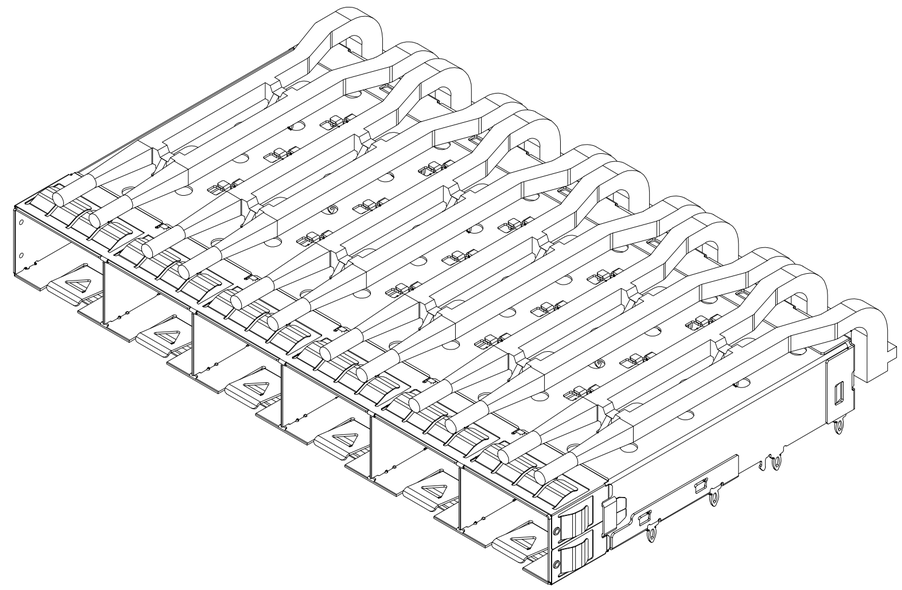


NOTES:
1.MATERIAL:
  CAGE: COPPER ALLOY,NI PLATING,THICKNESS 0.25mm
  LIGHT PIPE: CLEAR POLYCARBONATE
2.PACKAGING: TRAY PACKAGING
3.TEMPERATURE RANGE:
  OPERATING : −40°C TO +85°C
  NON OPERATING : −55°C TO +105°C

RoHS 2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED				
PART NO. LP16BC02800S			GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:1/4	REV:A
LEO	Kevin	Kevin	.XX±0.15	.XX±5°			
			.XXX±0.10				

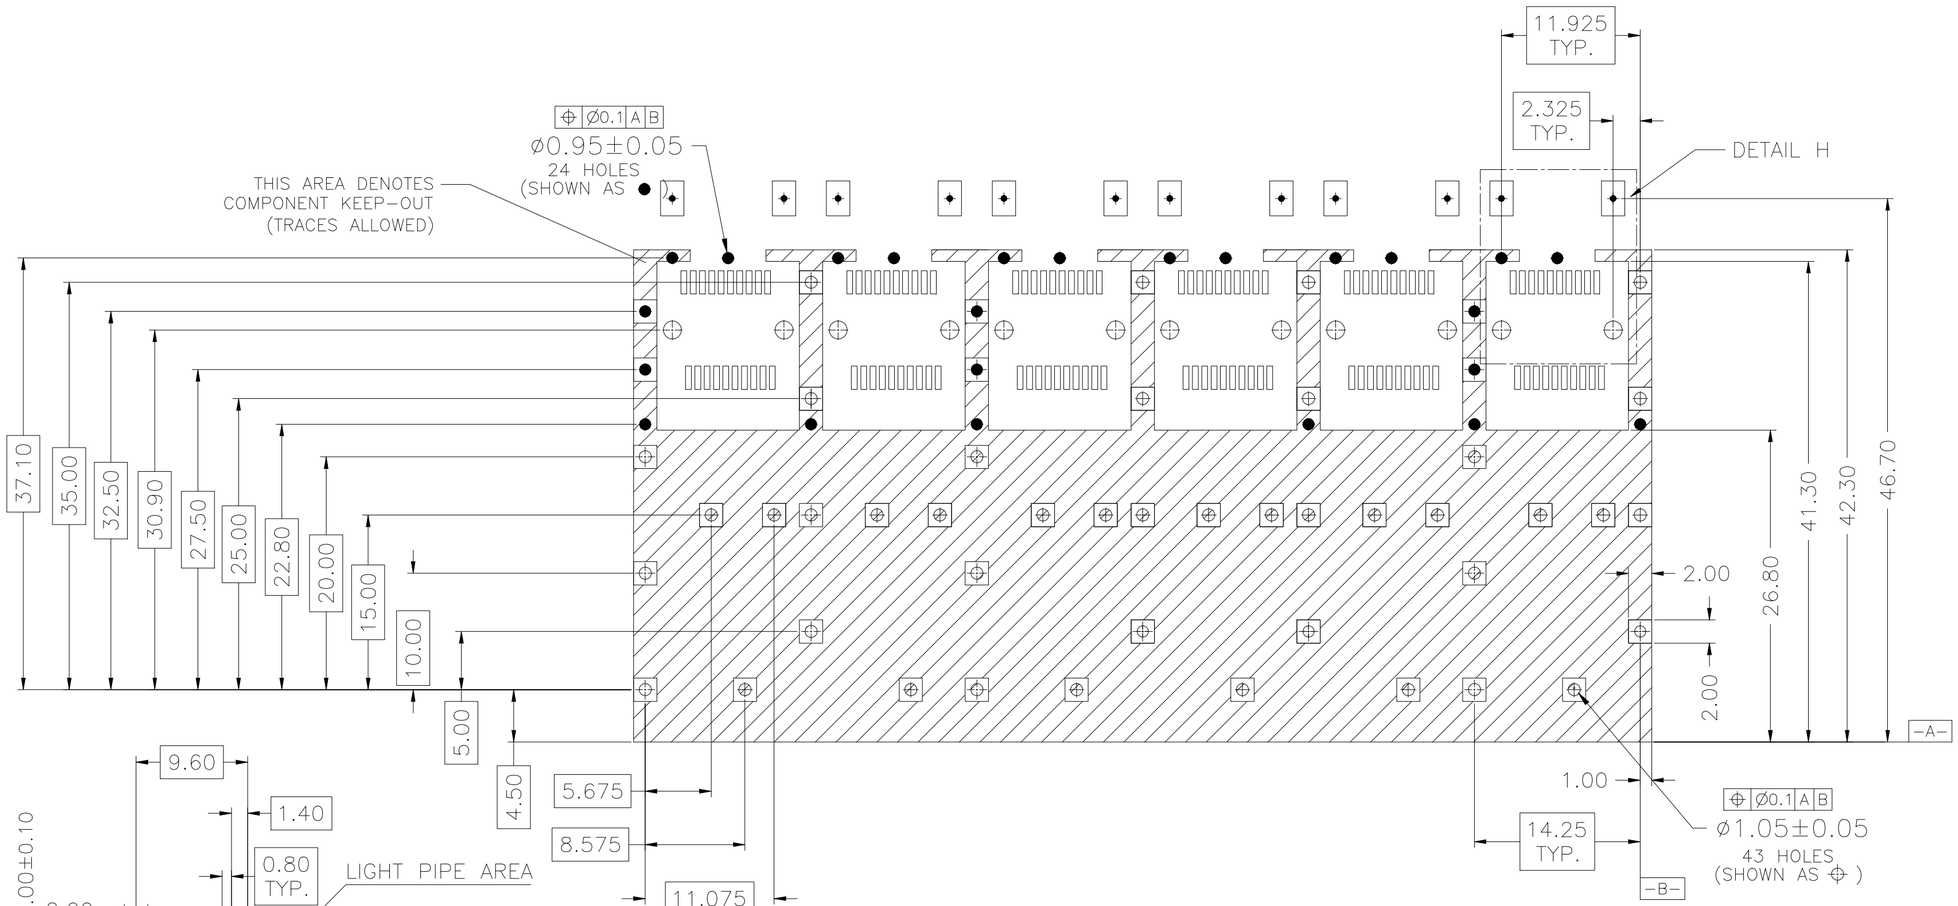


PCB LAYOUT
FOR SINGLE SIDE MOUNTING

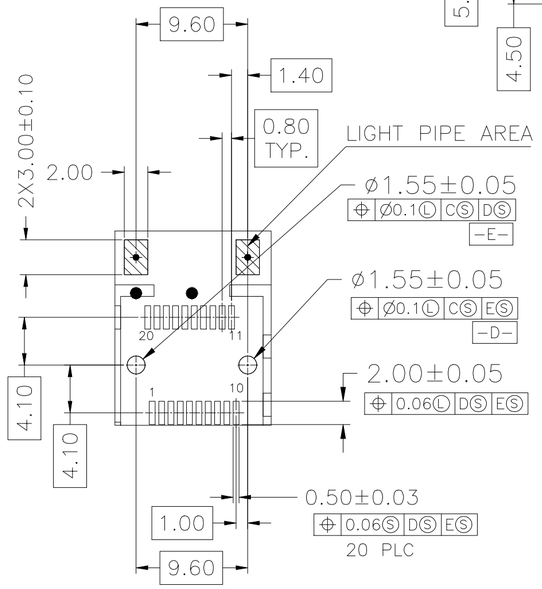


DETAIL H
RECOMMENDED CONNECTOR LAYOUT

RoHS
2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP16BC02800S			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:2/4	REV:A
LEO	Kevin	Kevin	.XX±0.15	.XX±5°			
			.XXX±0.10			

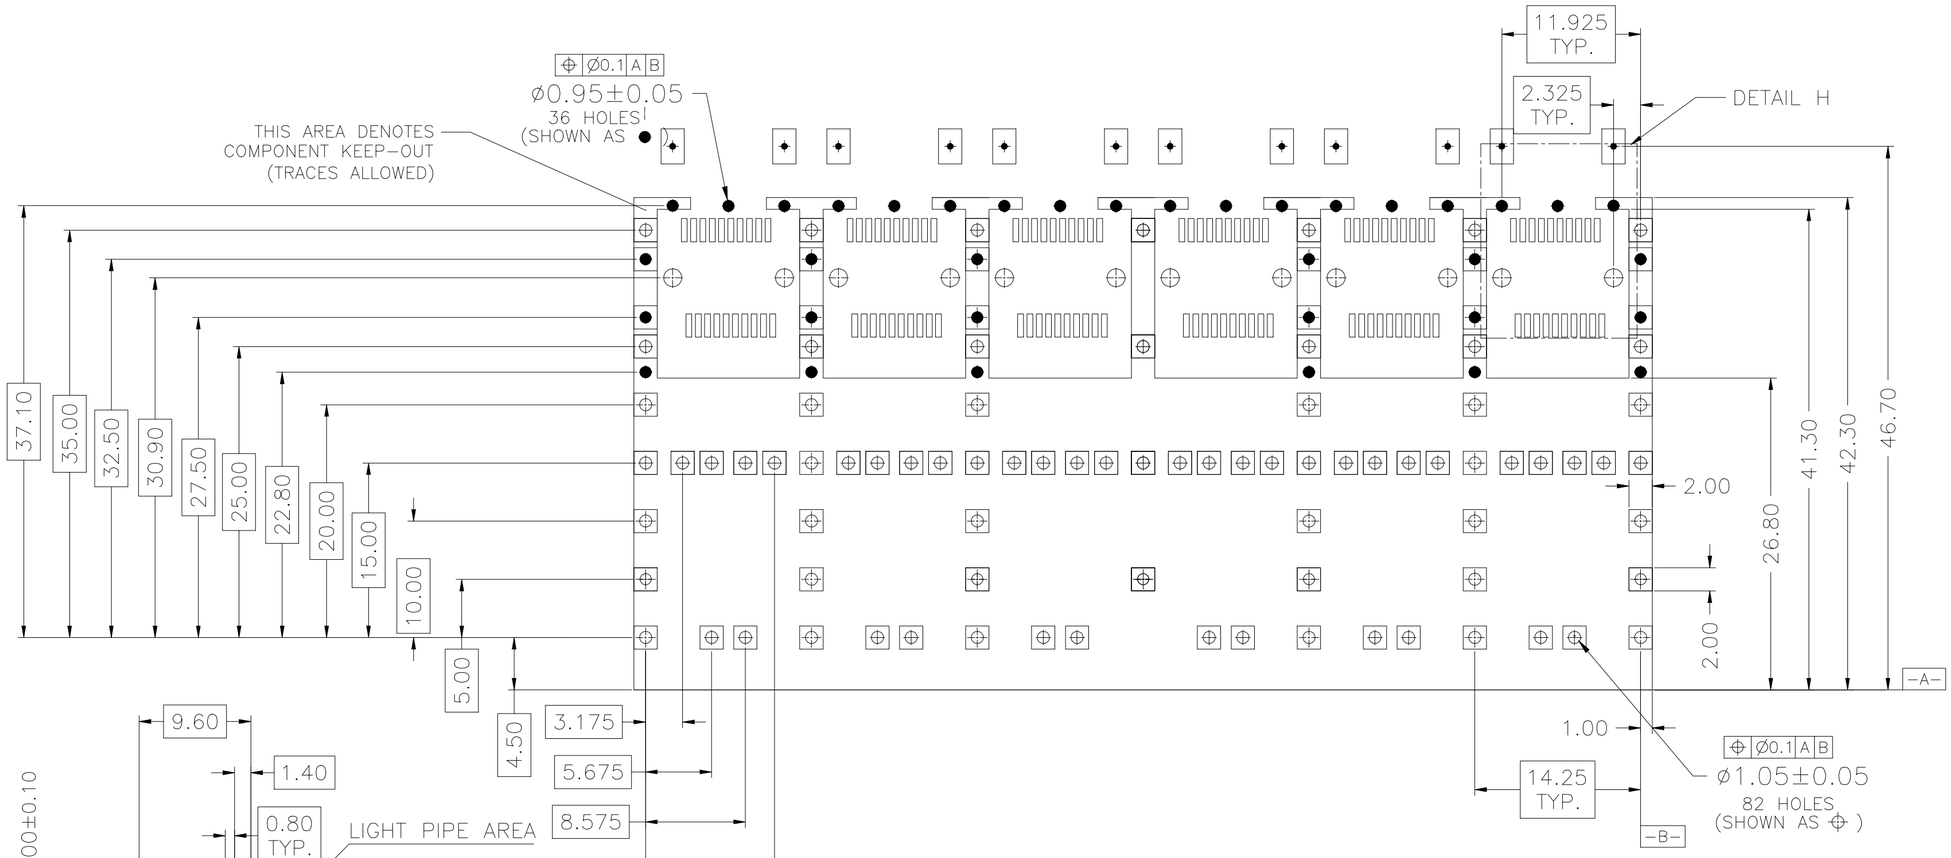


PCB LAYOUT
FOR BELLY TO BELLY MOUNTING

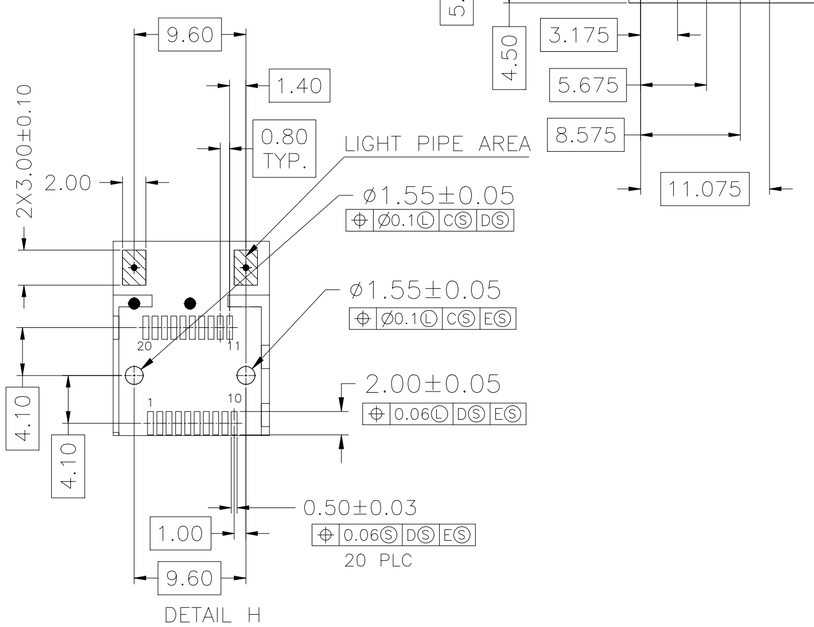


DETAIL H
RECOMMENDED CONNECTOR LAYOUT

RoHS
2011/65/EU


TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO.: LP16BC02800S			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:3/4 REV:A
LEO	Kevin	Kevin	.XX±0.15	.XX±5°		
			.XXX±0.10			

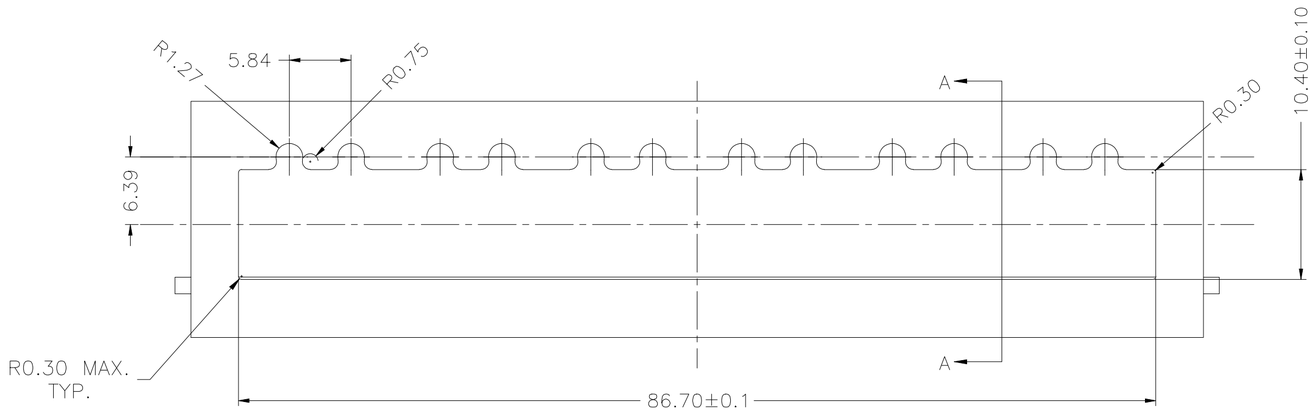


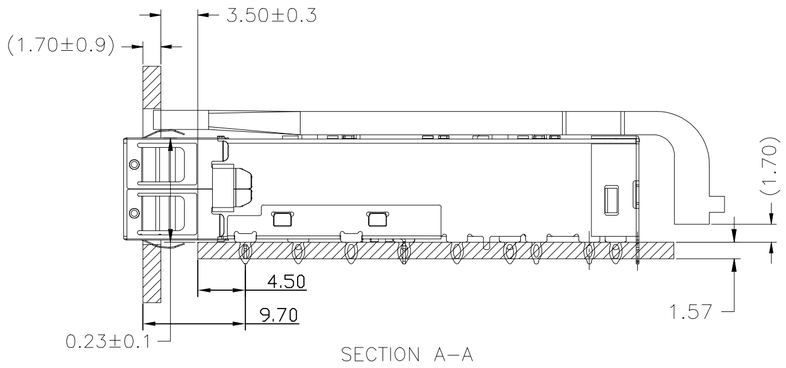

SECTION A–A

RECOMMENDED BEZEL DESIGN
SINGLE SIDED APPLICATIONS

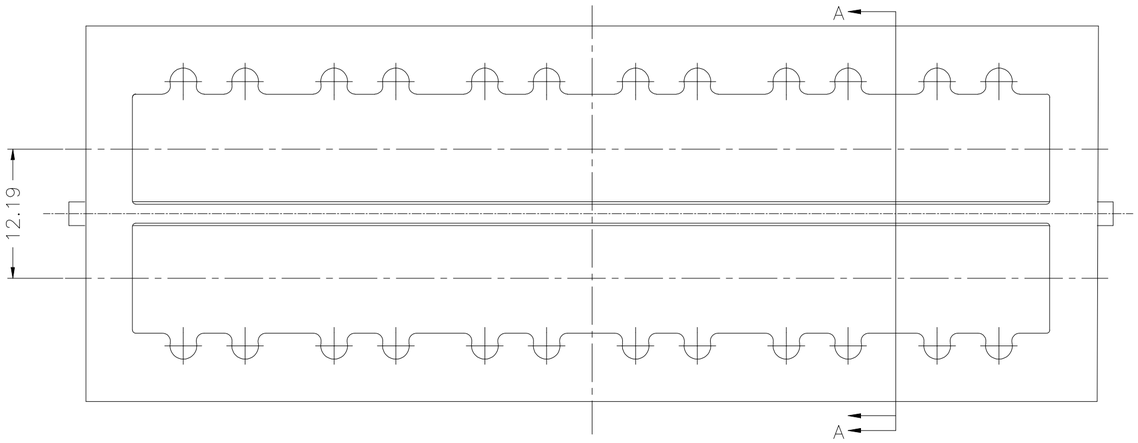

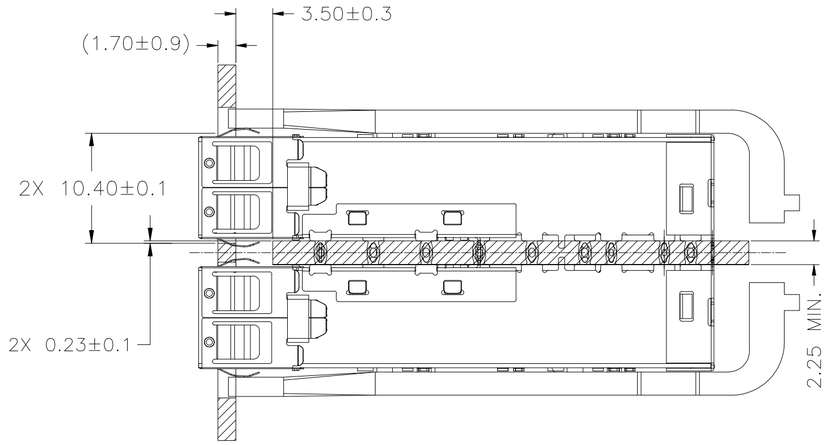

SECTION A–A

RECOMMENDED BEZEL DESIGN
BELLY TO BELLY APPLICATIONS

RoHS
2011/65/EU

TITLE: SFP+ 1X6 CAGE WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED				
PART NO.: LP16BC02800S			GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	.X±0.25	.X±1°	SCALE:1:1	SHEET:4/4	REV:A
LEO	Kevin	Kevin	.XX±0.15	.XX±5°			
			.XXX±0.10				