


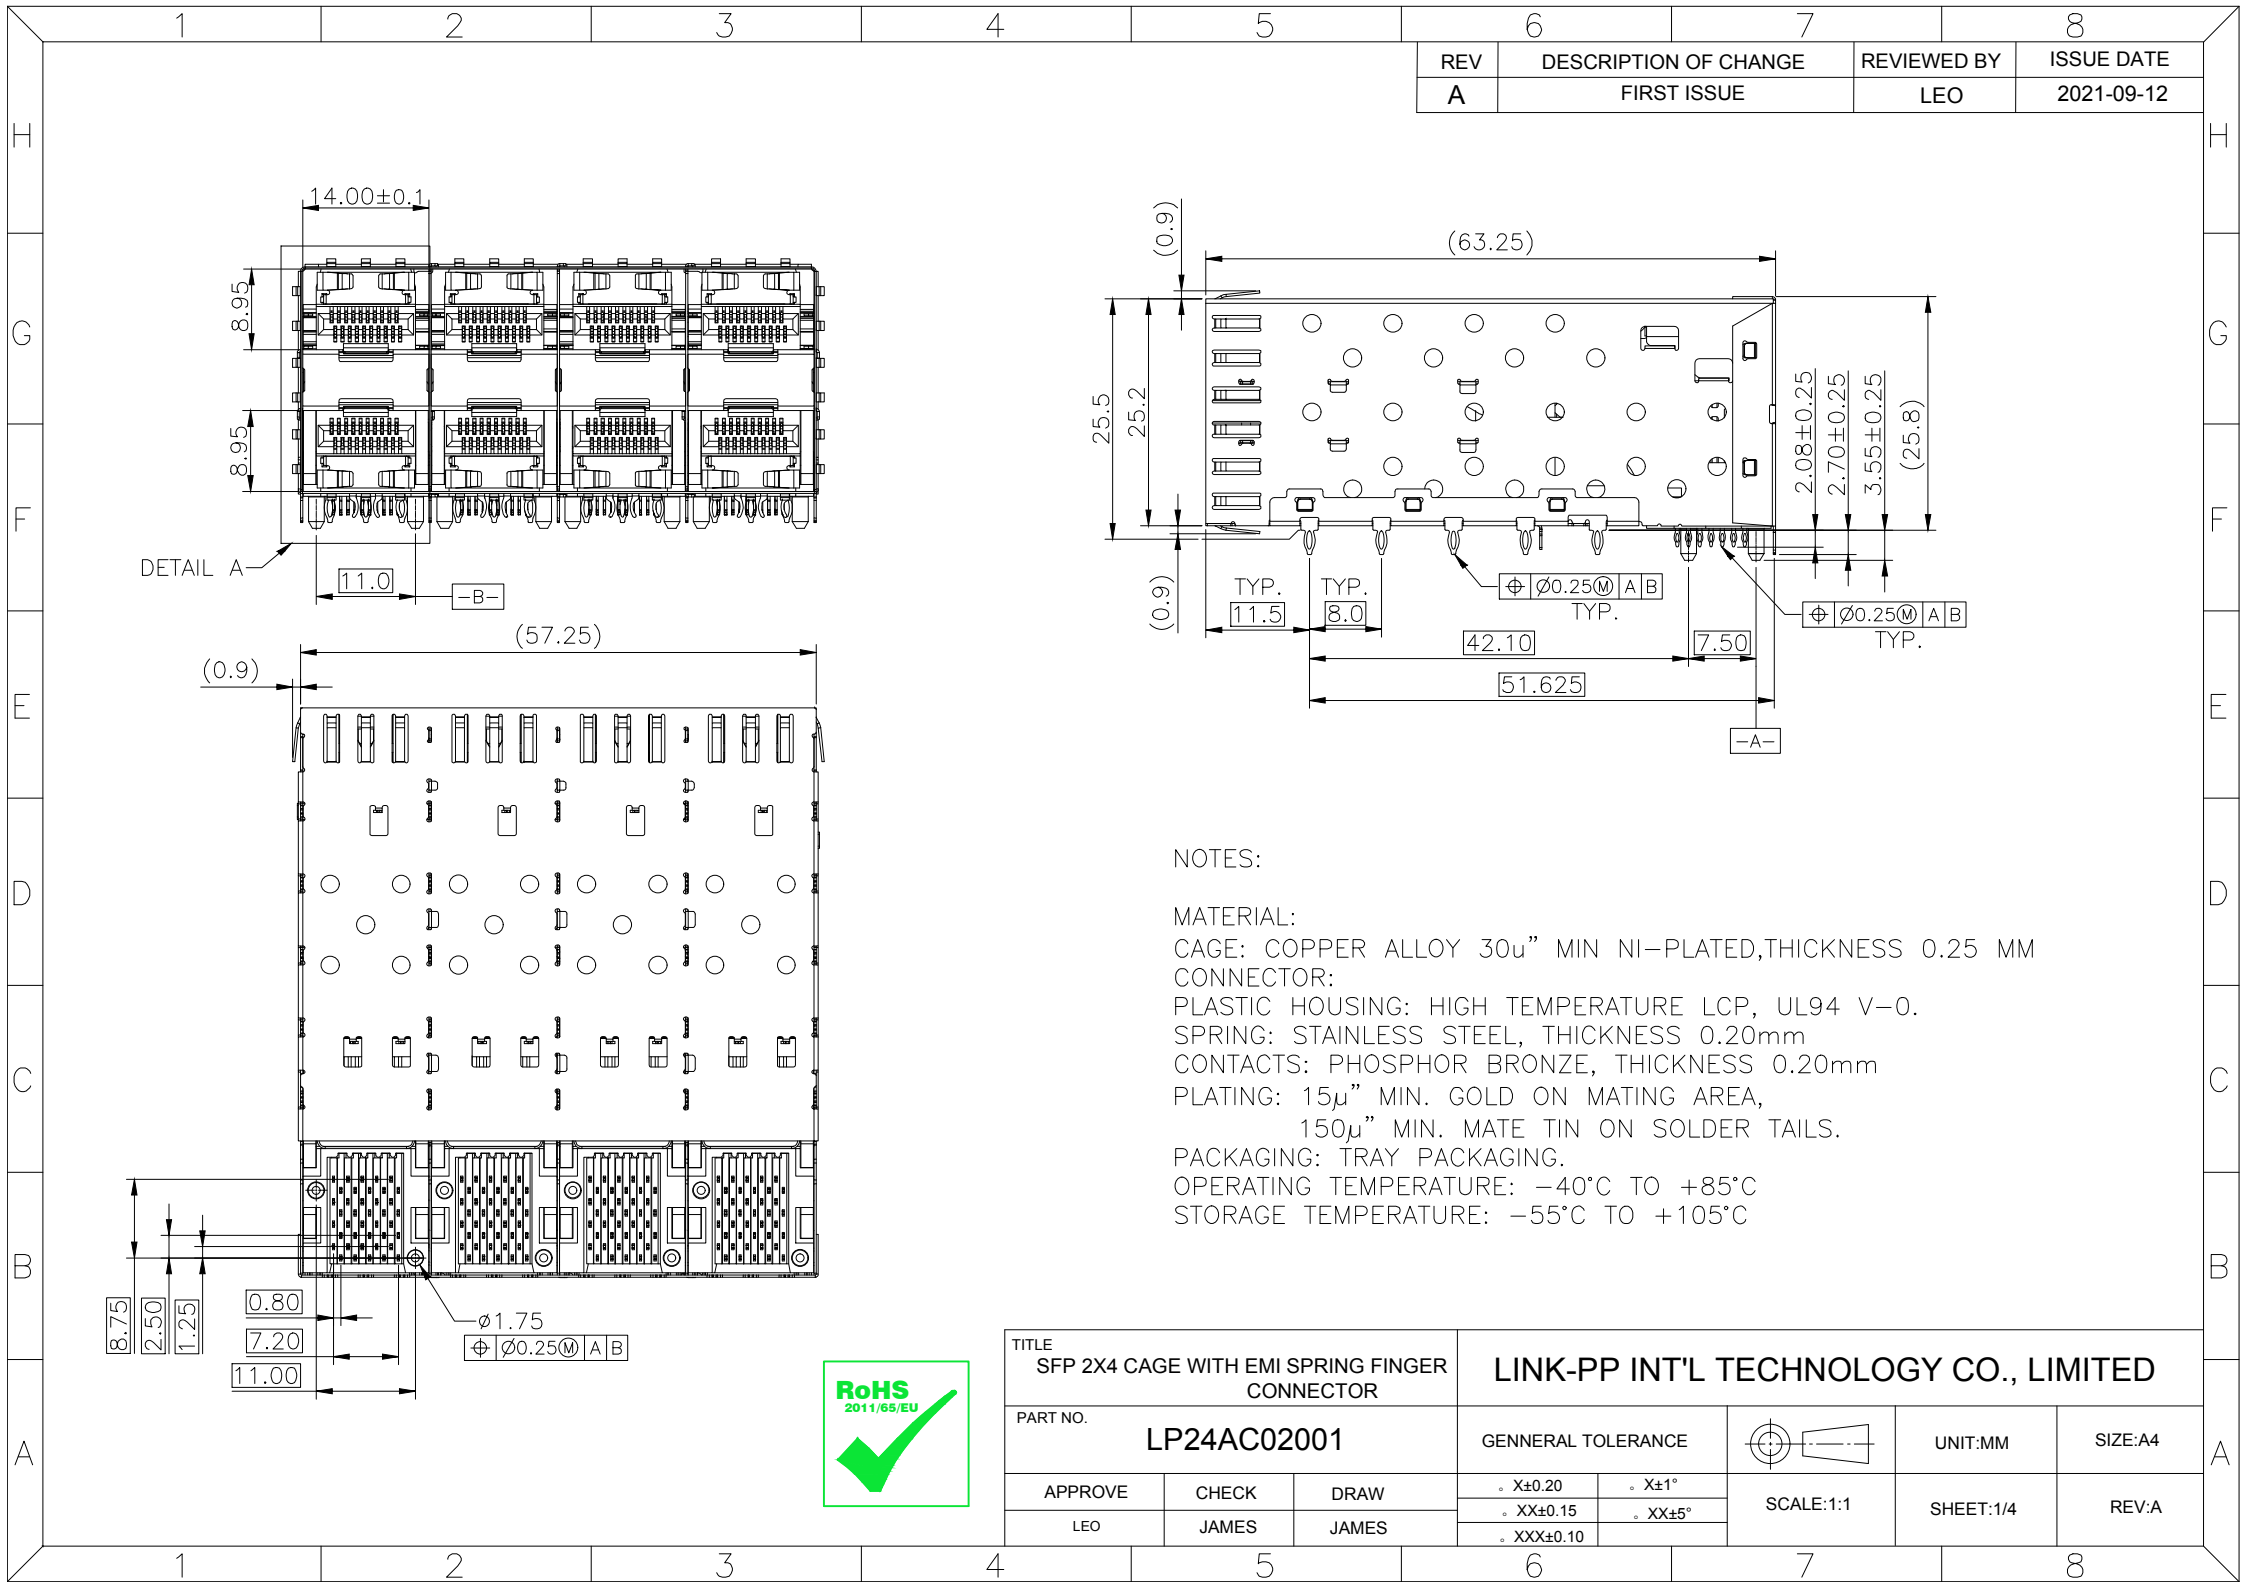


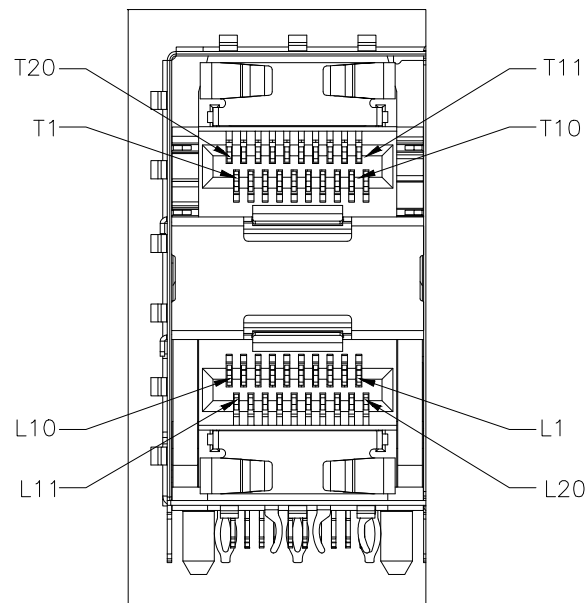

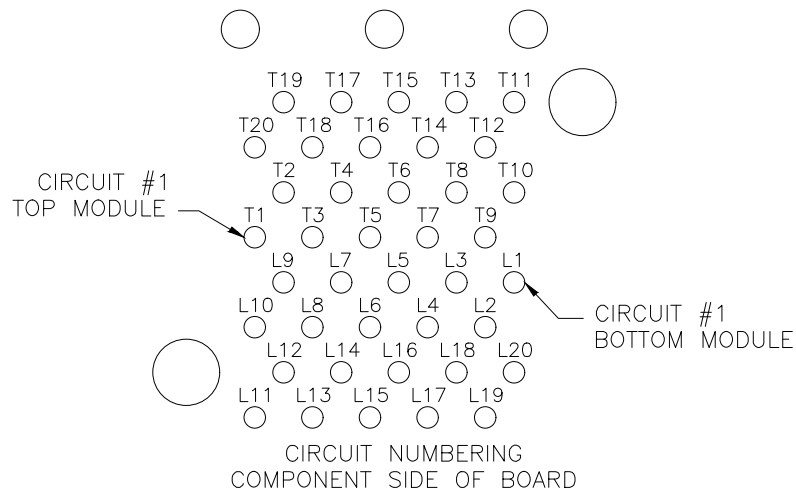


DETAIL A
CIRCUIT NUMBERING
AND LIGHTPIPE IDENTIFICATION

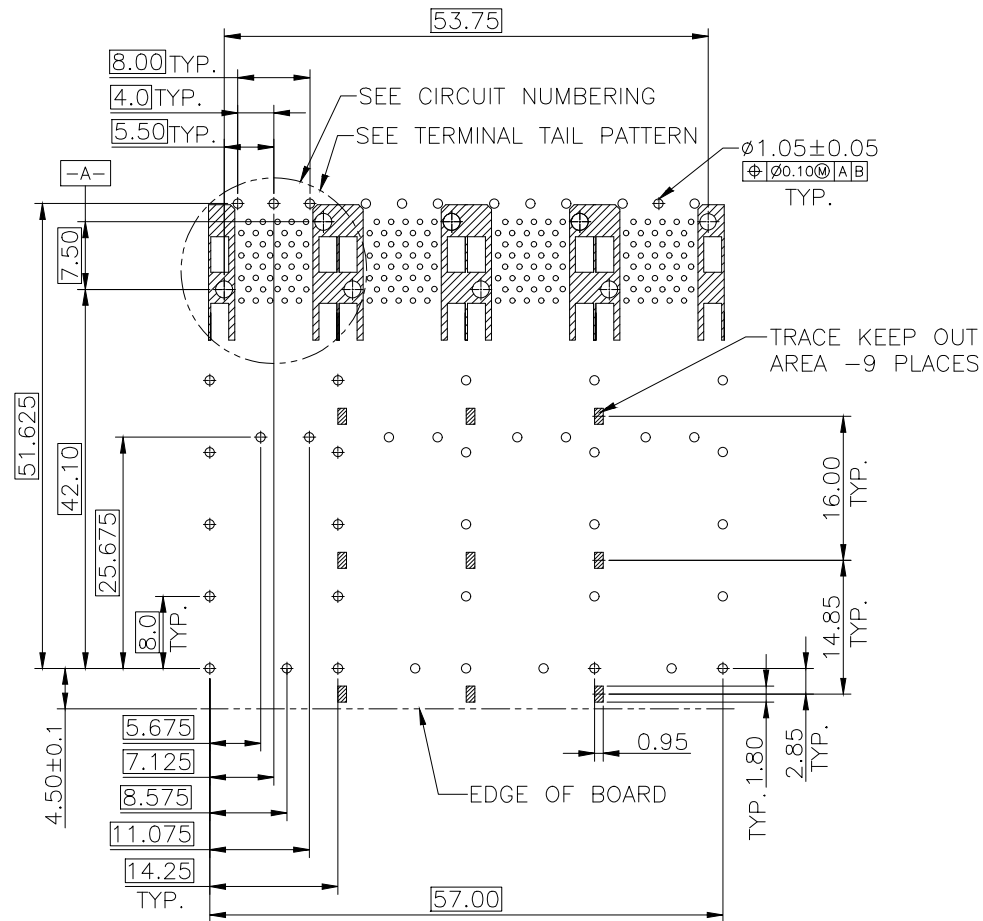

RECOMMENDED PCB LAYOUT - COMPONENT SIDE
RECOMMENDED PCB THICKNESS : 2.36MM(.093 INCH)
(MINIMUM PCB THICKNESS : 1.57)




TITLE SFP 2X4 CAGE WITH EMI SPRING FINGER CONNECTOR			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP24AC02001			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	• X±0.20	• X±1°	SCALE:1:1	SHEET:2/4
LEO	JAMES	JAMES	• XX±0.15	• XX±5°		
			• XXX±0.10			
					REV:A	

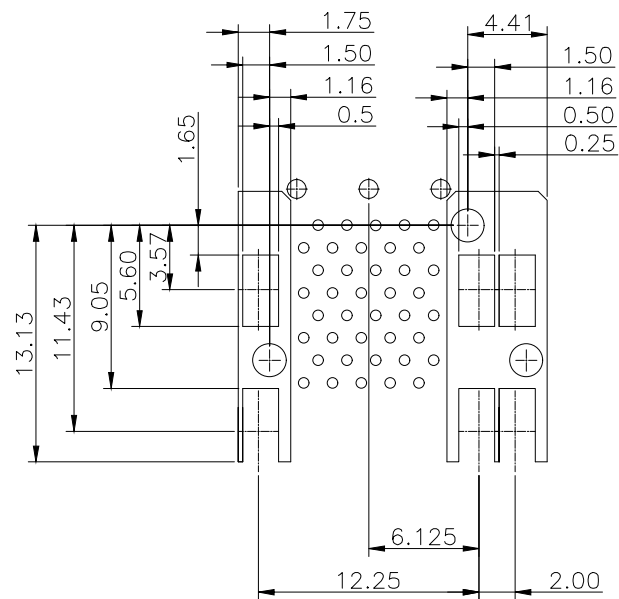

DETAIL-KEEPOUT ZONES


THE HATCHED AREA IN THIS VIEW INDICATES ZONES THAT ARE OCCUPIED BY THE PLASTIC HOUSING THAT SEATS AGAINST THE PCB AND BY THE VERTICAL METAL CAGE WALL THAT STOPS JUST SHORT OF THE PCB

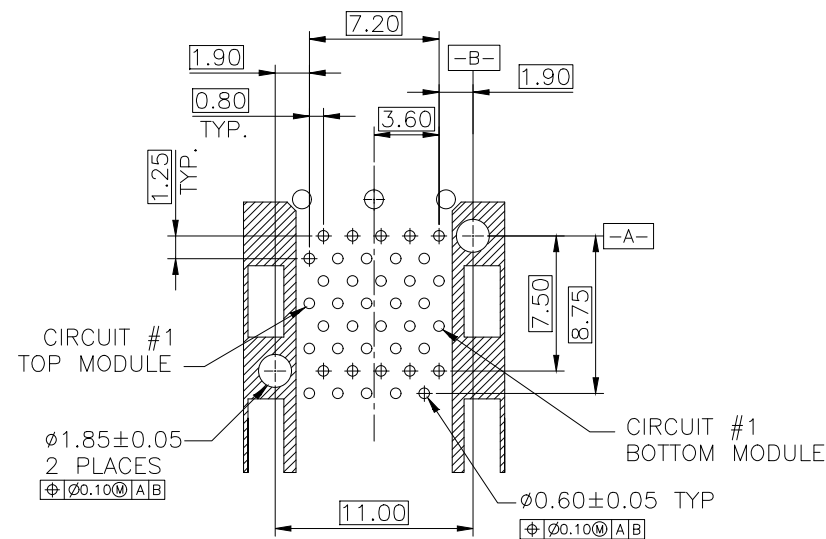

TERMINAL TAIL PATTERN



TITLE SFP 2X4 CAGE WITH EMI SPRING FINGER CONNECTOR			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP24AC02001			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	• X±0.20	• X±1°	SCALE:1:1	SHEET:3/4
LEO	JAMES	JAMES	• XX±0.15	• XX±5°		
			• XXX±0.10			
					REV:A	

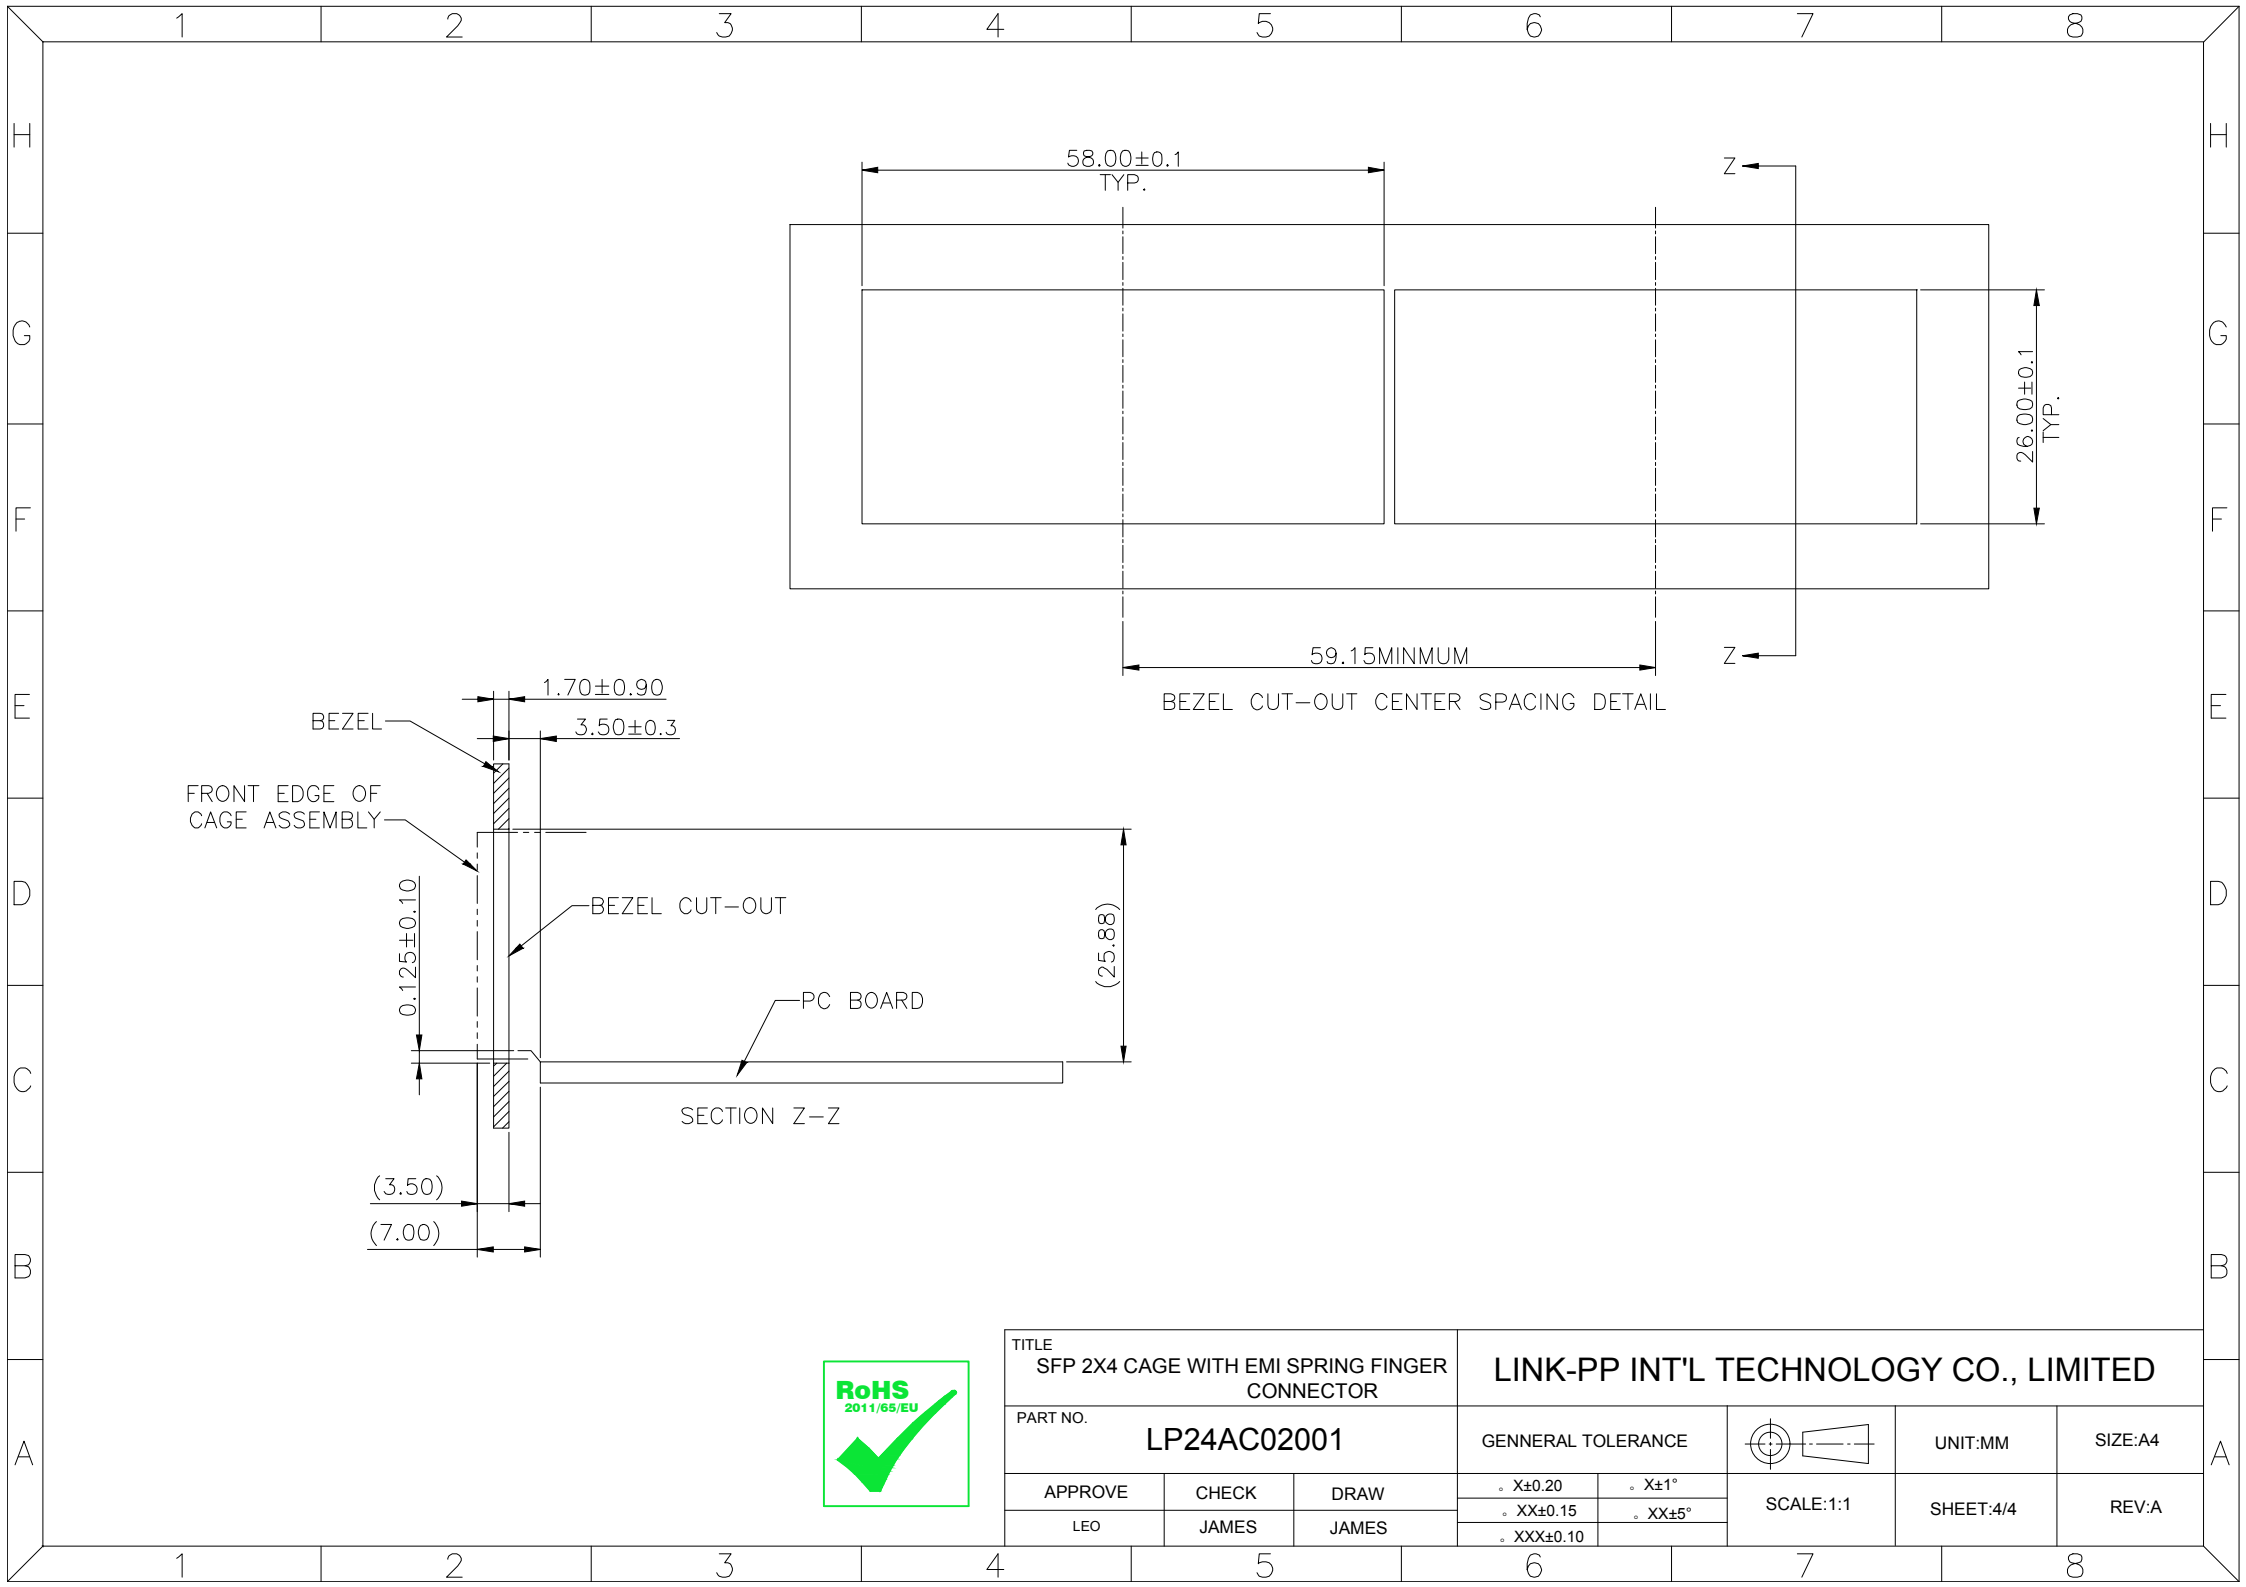

TITLE SFP 2X4 CAGE WITH EMI SPRING FINGER CONNECTOR			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP24AC02001			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:4/4
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°		
			◦ XXX±0.10			