



REV	DESCRIPTION OF CHANGE	REVIEWED BY	ISSUE DATE
A	FIRST ISSUE	LEO	2021-06-02

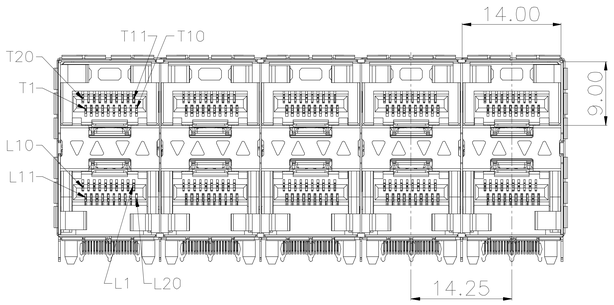

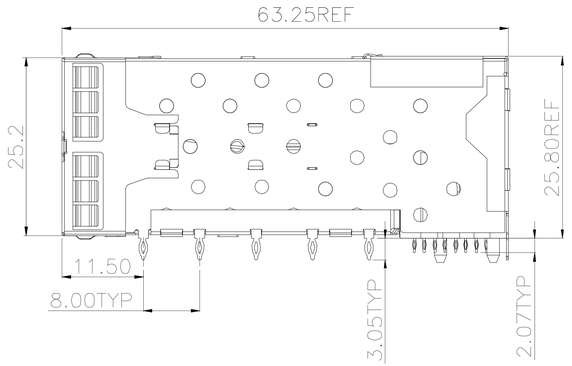

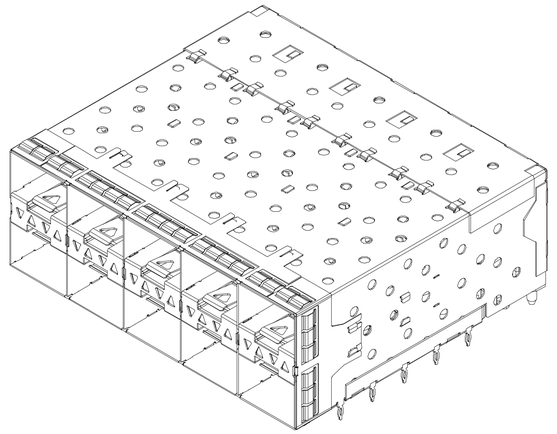

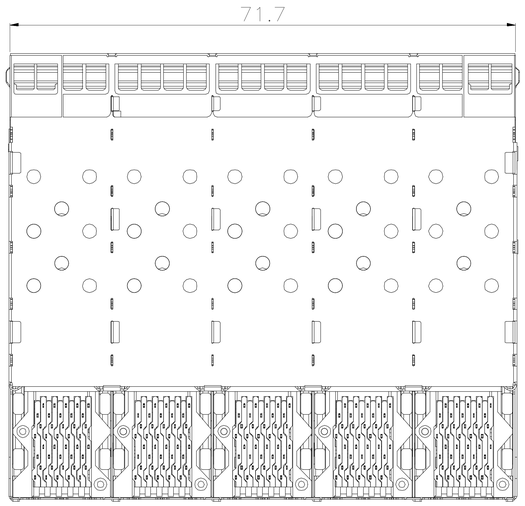

NOTES:

MATERIAL:
CAGE: COPPER ALLOY 30u" MIN NI-PLATED,THICKNESS 0.25 MM
CONNECTOR:
PLASTIC HOUSING: HIGH TEMPERATURE LCP, UL94 V-0.
LIGHT PIPE: POLYCARBONATE; COLOR: CLEAR
SPRING: STAINLESS STEEL, THICKNESS 0.20mm
CONTACTS: PHOSPHOR BRONZE, THICKNESS 0.20mm
PLATING: 15μ" MIN. GOLD ON MATING AREA,
150μ" MIN. MATE TIN ON SOLDER TAILS.
PACKAGING: TRAY PACKAGING.
TEMPERATURE RANGE: -40°C TO +85°C
STORAGE TEMPERATURE: -55°C TO +105°C


RoHS
2011/65/EU


TITLE	SFP+ 2X5 CAGE & CONNECTOR WITH EMI SPRING FINGER LIGHT PIPE	LINK-PP INT'L TECHNOLOGY CO., LIMITED
PART NO.	LP25BC01101	GENNERAL TOLERANCE

APPROVE	CHECK	DRAW
LEO	JAMES	JAMES


◦ X±0.20	◦ X±1°
◦ XX±0.15	◦ XX±5°
◦ XXX±0.10	

SCALE:1:1	UNIT:MM	SIZE:A4
	SHEET:1/4	REV:A

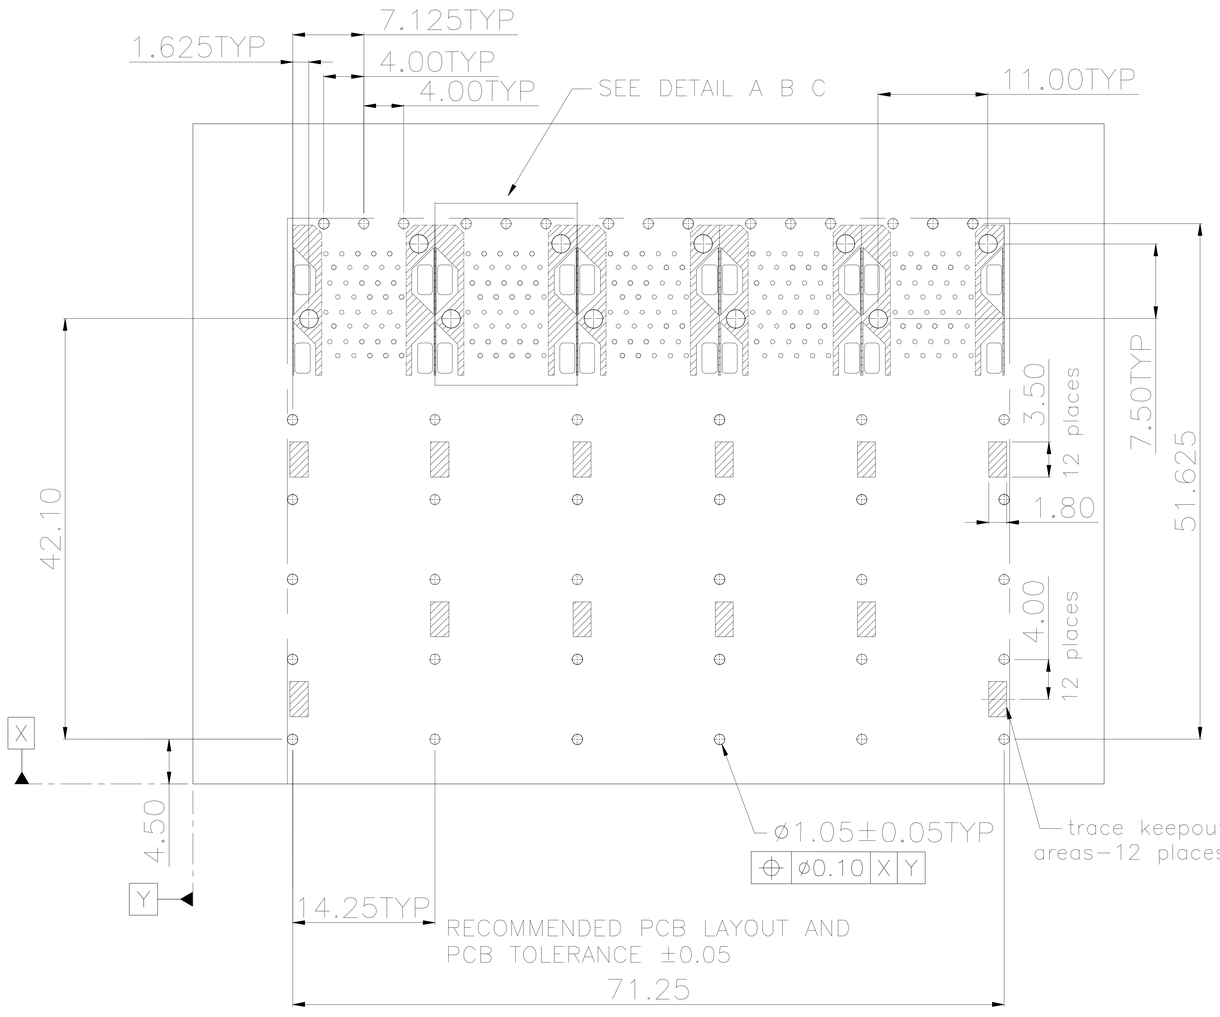

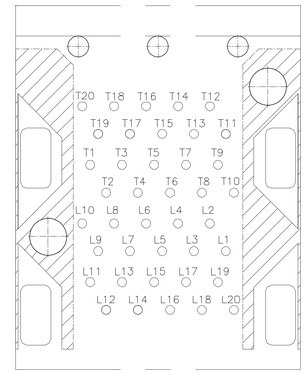

DETAIL A
SCALE 2:1

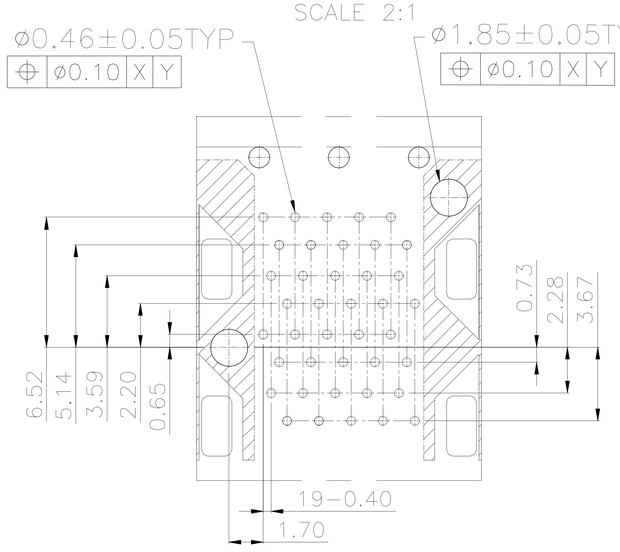

DETAIL B
SCALE 2:1


1. RECOMMENDED PCB THICKNESS:2.36
(MINIMUM PCB THICKNESS:1.57),(COMPONENT SIDE)

RoHS
2011/65/EU


TITLE: SFP+ 2X5 CAGE & CONNECTOR WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED			
PART NO. LP25BC01101			GENNERAL TOLERANCE		UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:2/3	REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°			
			◦ XXX±0.10				



RECOMMENDED PANEL CUTOUT AND PC BOARD
PANEL POSITION AND THICKNESS 0.8–2.6

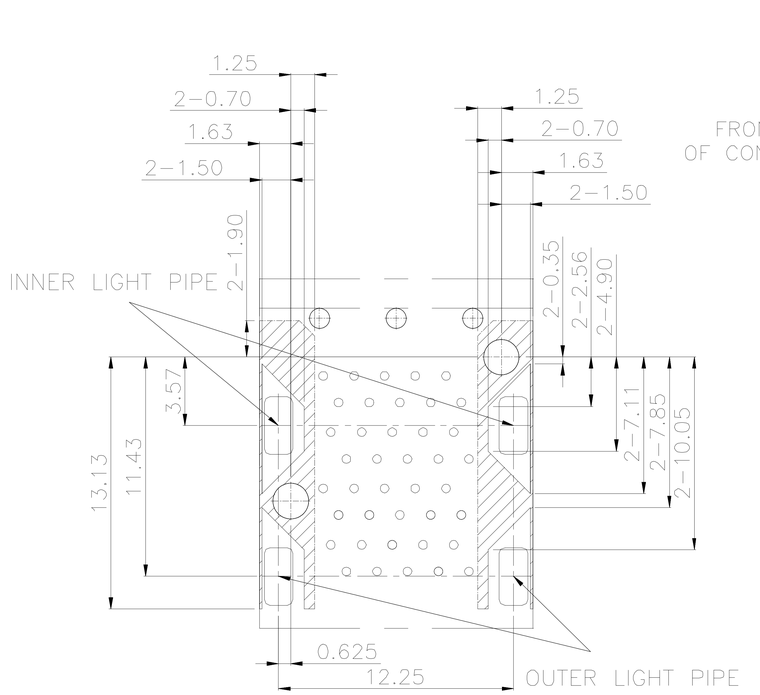


DETAIL C
SCALE 2:1

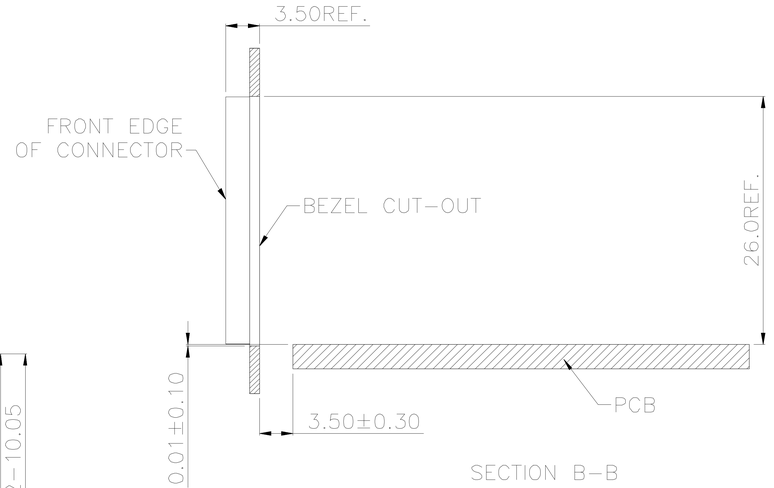

SECTION B–B

BEZEL OPENING ABOVE
TOP OF PC BOARD

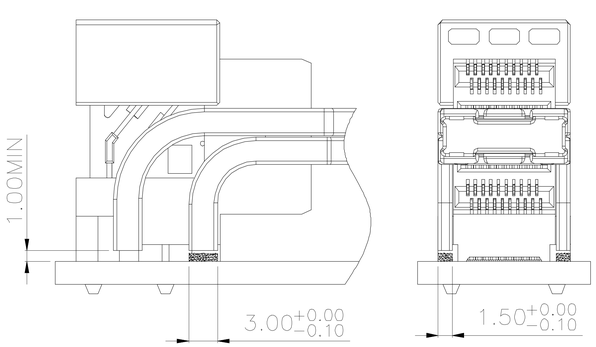

LED CLEARANCE REQUIREMENTS

RoHS
2011/65/EU

TITLE: SFP+ 2X5 CAGE & CONNECTOR WITH EMI SPRING FINGER LIGHT PIPE			LINK-PP INT'L TECHNOLOGY CO., LIMITED				
PART NO. LP25BC01101			GENNERAL TOLERANCE			UNIT:MM	SIZE:A4
APPROVE	CHECK	DRAW	◦ X±0.20	◦ X±1°	SCALE:1:1	SHEET:3/3	REV:A
LEO	JAMES	JAMES	◦ XX±0.15	◦ XX±5°			
			◦ XXX±0.10				