



		DESCRIPTION	DATE	APPD

Mechanical:


REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2015-05-11	





Front Side View

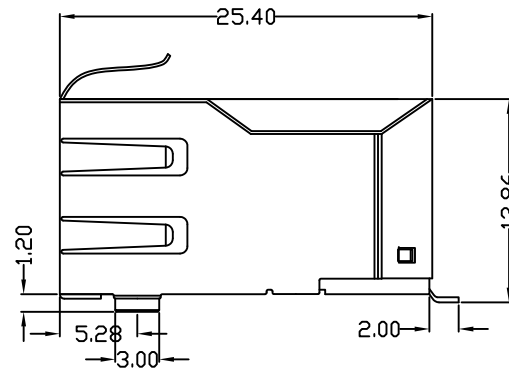


Left Side View

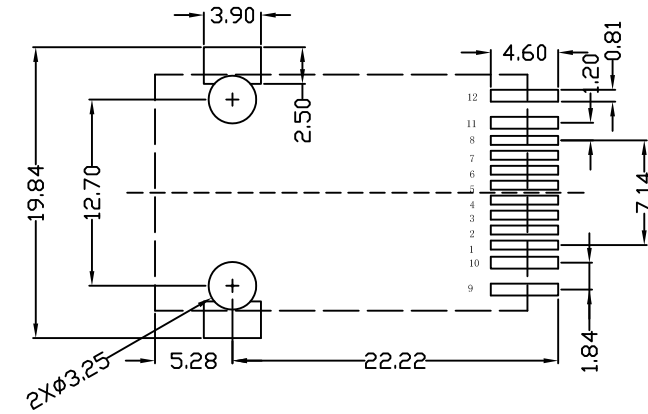

Suggested PCB Layout

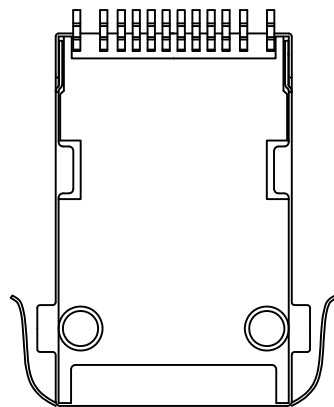

Bottom Side View

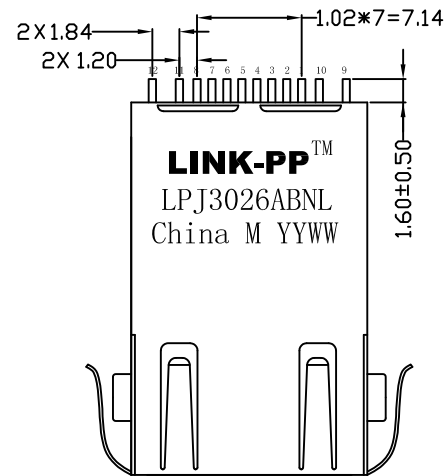

Top Side View

NOTES:

1. Meets IEEE 802.3 specification
2. Connector Materials:

Housing Material: Thermoplastic LCP+30%G.F UL94V-0
 Contact Material: Phosphor Bronze C5210R-EH Thickness=0.35mm
 Pins: Brass C2680R-H Thickness=0.35mm
 Shield: SUS 201-1/2H Thickness=0.2mm
 Contact plating: Gold 6 micro-inches min. In contact area.

3. Wave solder tip temperature: 265°C Max, 5 Sec Max

X:X	±0.25	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.20	CHKD:	TITLE: Surface Mount RJ45 Connector with 10/100 Base-T Integrated Magnetics	
X:XXX	±0.05	DR: TOM	PART NO.: LPJ3026ABNL	
ANGLES	±1°	UNIT: mm	DWG NO.: LP15051262	
	SCALE: 2/1	SHEET: 2/2	REV: A	