



Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2014-06-19	

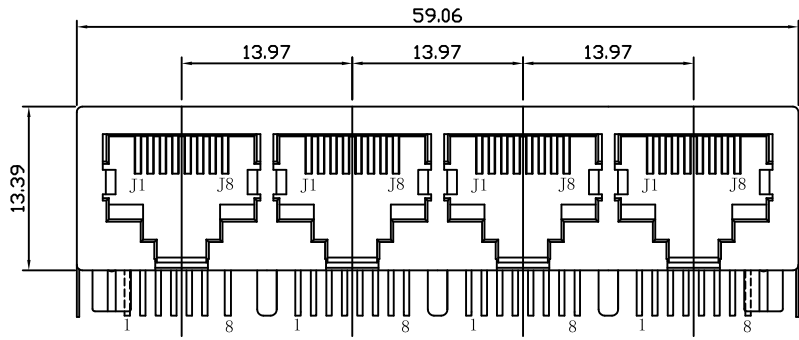


Front Side View

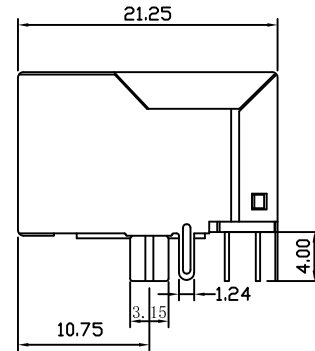

Left Side View



Top Side View

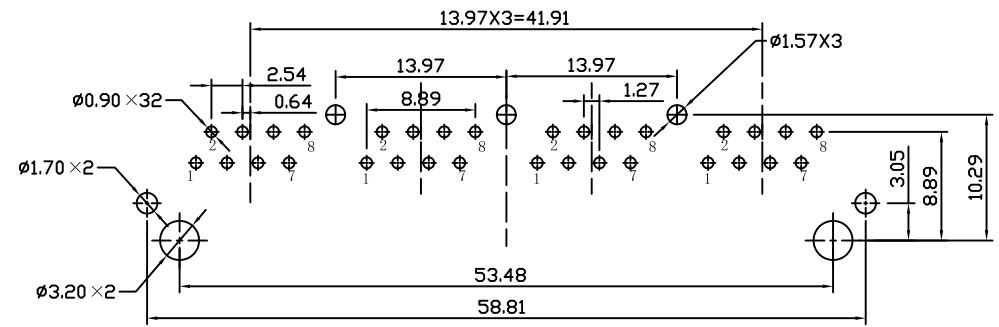

Suggested PCB Layout (Top View)

NOTES:

1. Meets IEEE 802.3 specification
2. Connector Materials:
Housing: Thermoplastic UL94V-0
Contact/Shield: Copper alloy
Shield plating: Nickel
Contact plating: Gold 6 micro-inches min. In contact area.
3. Wave solder tip temperature: 265°C Max, 5 Sec.
4. UL Certification: File Number E484635.



X:X ±0.25	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX ±0.20	CHKD:	
X:XXX ±0.05	DR: TOM	TITLE: 1*4 RJ45 Connector with 10/100 Base-T Integrated Magnetics
ANGLES ±1°	UNIT: mm	PART NO.: LPJ46203DNL
	SCALE: 2/1	SHEET: 2/2
	REV: A	DWG NO.: LP14061266