
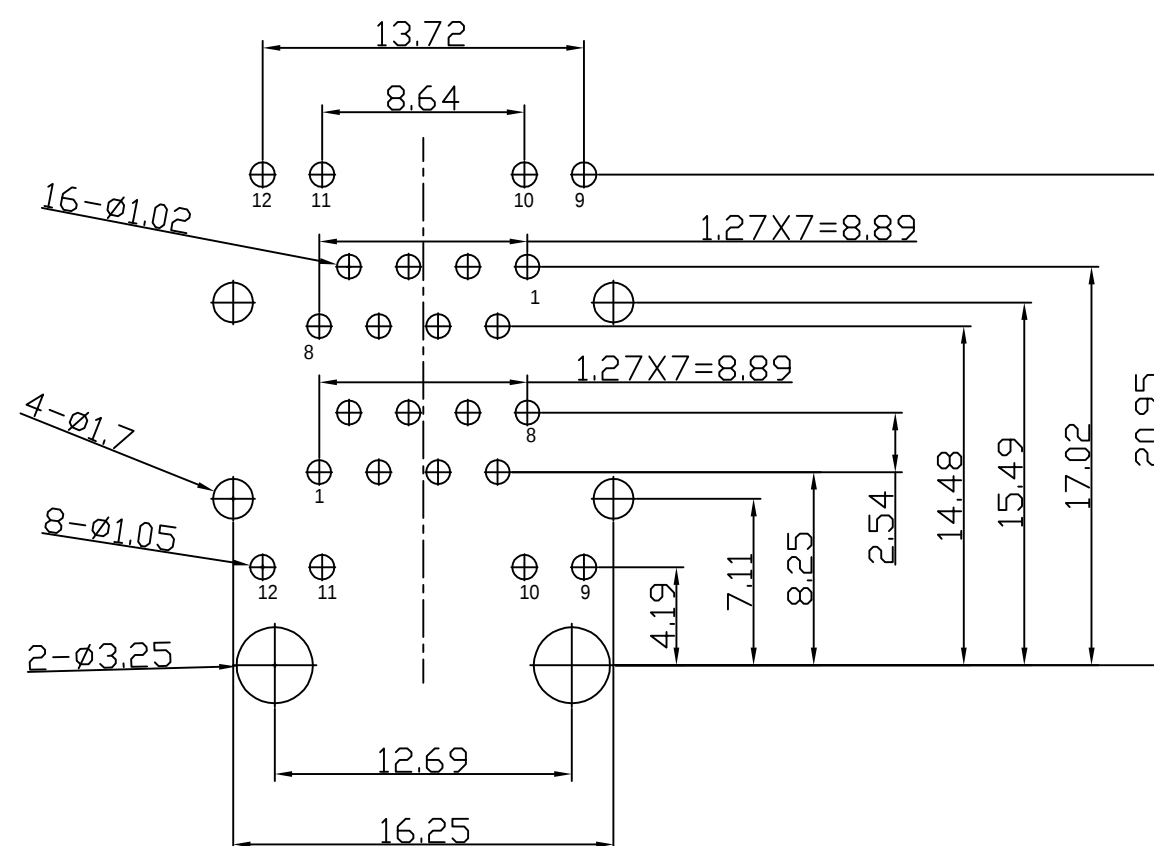


Mechanical :

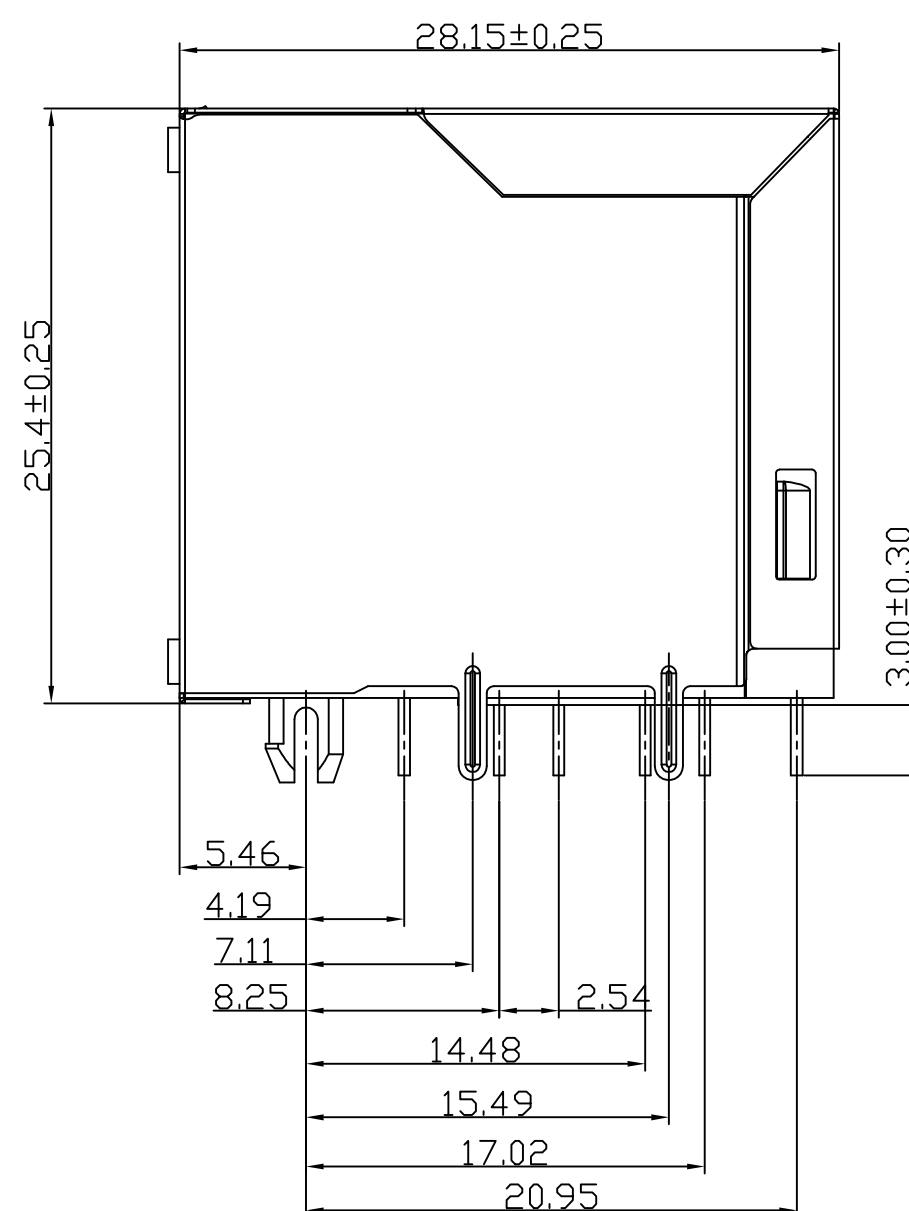


RoHS
2011/65/EU

NOTES:

1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 50 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.

1. INSERT MATERIAL: PBT+30%G.F BLACK UL94V-0.
2. CONTACT MATERIAL: PHOSPHOR BRONZE ROUND PIN Ø0.46mm.
3. CONTACT PLATING: GOLD FLASH OVER NICKEL.
4. SHIELD: 0.20mm THICKNESS COPPER ALLOY PLATED NICKEL.
5. OPERATING LIFE: 750 CYCLES MIN.

1. STORAGE: -40°C ~ +85°C
2. OPERATION: -40°C ~ +85°C.
3. WAVE SOLDER TIP TEMPERATURE AND TIME: 250°C, 5 SEC.
4. UL CERTIFICATION: FILE NUMBER E484635

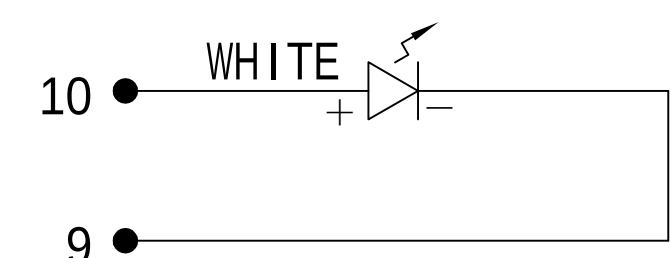

RIGHT LED

LINK-PP Website: <http://www.link-pp.com> Email: info@link-pp.com Tel: +86-0752-3322916 Fax: +86-0752-3161926