

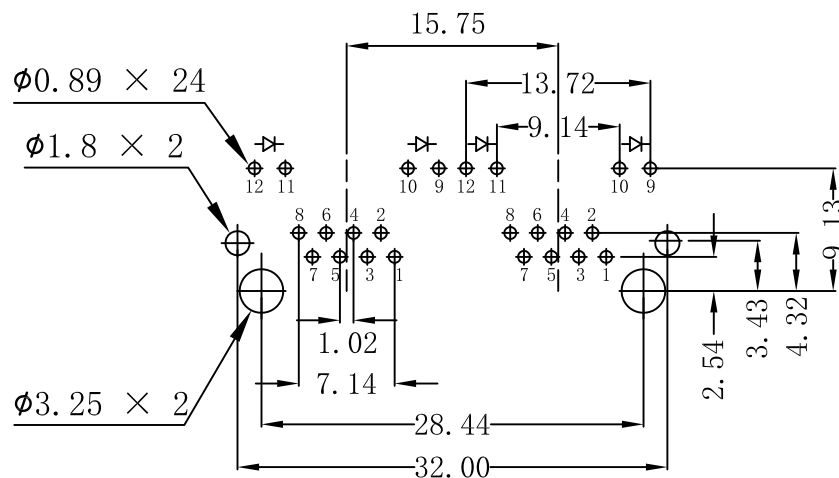
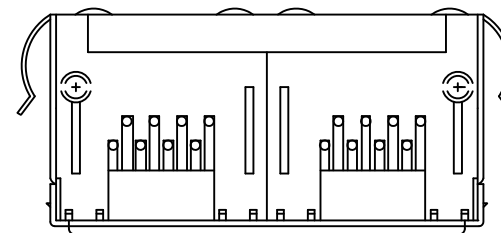
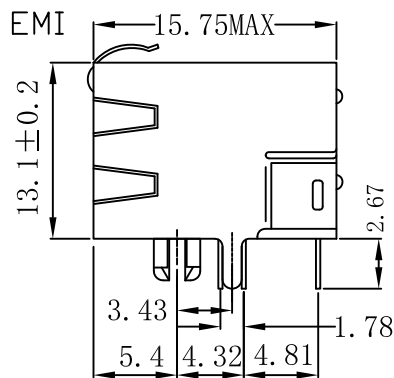


REW.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		26/08/2009	

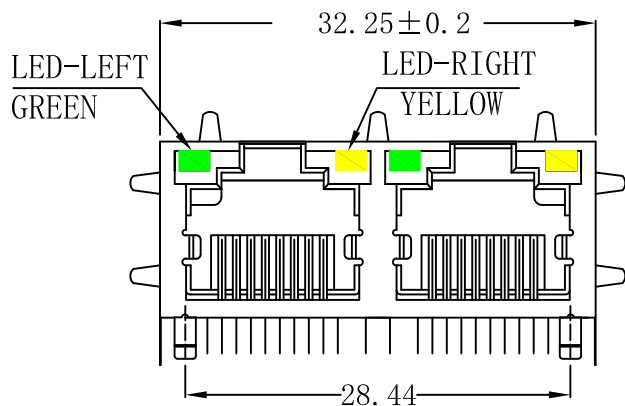

PC Board Layout (Top View)
Component Side Shown



Emitting Color	λ_p (nm)	V _F @I _F =20mA	I _R @V _R =5V
GREEN	565	1.8~2.6V	10 μ A max
YELLOW	585	1.8~2.6V	10 μ A max



NOTES:

Electrical:

- 1. Voltage rating : 125 VAC RMS
- 2. Current Rating : 1.5 AMP
- 3. Contact resistance : 50 m Ω Max
- 4. Insulation resistance : 500 M Ω Min @500V DC
- 5. Dielectric strength : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- 1. Housing & Insert Material : PBT UL94V-0.
- 2. Contact Material : Diameter 0.46mm Phosphor Bronze Gold Plating Over Nickel.
- 3. Operating Life : 750 Cycles Min.

ENVIRONMENTAL:

- 1. Storage : -40°C ~ +85°C
- 2. Operation : -40°C ~ +85°C.
- 3. Wave solder temperature : 265°C, 5 Sec MAX
- 4. UL Certification : File Number E484635.

X:X	±0.25	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.20	CHKD:	TITLE: SIDE ENTRY PCB JACK WITH SHIELD	
X:XXX	±0.05	DR: TOM	PART NO.: LPJE201AHNL	
ANGLES	±1°	UNIT: mm	DWG NO.: LP09082603	
	SCALE: 1/1	SHEET: 1/1	REV: A	