




REW.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2010/07/28	

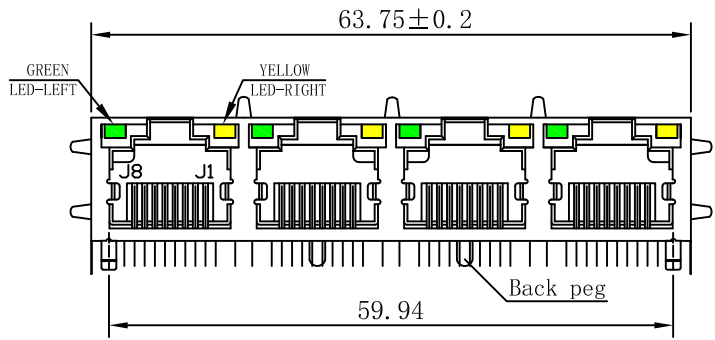

- NOTES:
- MATERIAL:
- HOUSING MATERIAL :GLASS FILLED POL YESTER UL94V-0.
  - CONTACT MATERIAL :PHISPHOR B RONZE  $\phi 0.46$ MM.
  - PLATING :GOLD PLATING OVER NICKEL.
  - SHIEL :0.20 THICKNESS COPPER ALLOY WITH NICKEL PLATED.
- ELECTRICAL:
- VOLTAGE RATING :125 VAC RMS.
  - CURRENT RATING :1.5 AMP.
  - CONTACT RESISTANCE:30 MILLIOHMS MAX.
  - INSULATION RESISTANCE:500 MEGOHMS MIN @ 500V DC.
  - DIELECTRIC WITHSTANDING RESISTANCE: 1000V AC RMS 50Hz. 1MIN
- MECHANICAL:
- DURRABILITY :750 CYCLES MIN.
  - PCB RETENTION PRE-SOLDER : 1 LB MIN.
- ENVIRONMENTAL:
- STORAGE : -40°C ~ +85°C
  - OPERATION : -40°C ~ +85°C

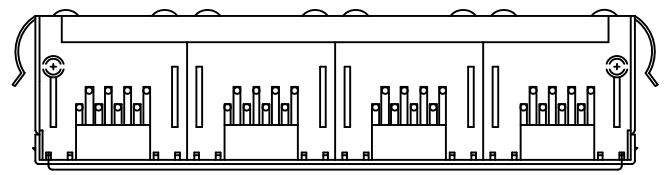

GREEN

YELLOW

12

11

LEFT LED

10


9

RIGHT LED

LPJE401XAHNL

Gold Plating	"X"
Gold Flash	0 <input type="checkbox"/>
1.5u"	1 <input type="checkbox"/>
3u"	2 <input type="checkbox"/>
6u"	3 <input type="checkbox"/>
15u"	4 <input type="checkbox"/>
30u"	5 <input type="checkbox"/>
50u"	6 <input checked="" type="checkbox"/>

Emitting Color	$\lambda$ p(nm)	VF@IF=20mA	IR @VR=5V
GREEN	565	1.8~2.6V	10 $\mu$ A max
YELLOW	585	1.8~2.6V	10 $\mu$ A max

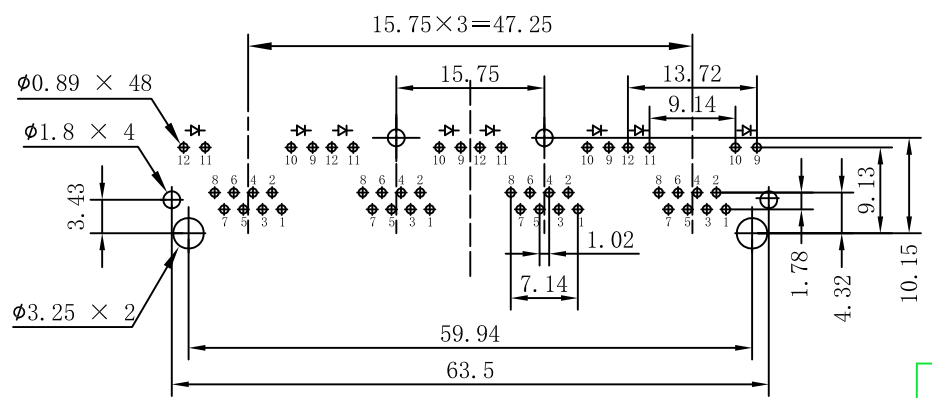

PC Board Layout (Top View)  
Component Side Shown



X:X	±0.30	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.25	CHKD:	TITLE: SIDE ENTRY PCB JACK WITH SHIELD	
X:XXX	±0.05	DR: TOM	PART NO.: LPJE4016AHNL	
ANGLES	±1°	UNIT: mm	DWG NO.: LP10072815	
	SCALE: 1/1	SHEET: 1/1	REV: A	