

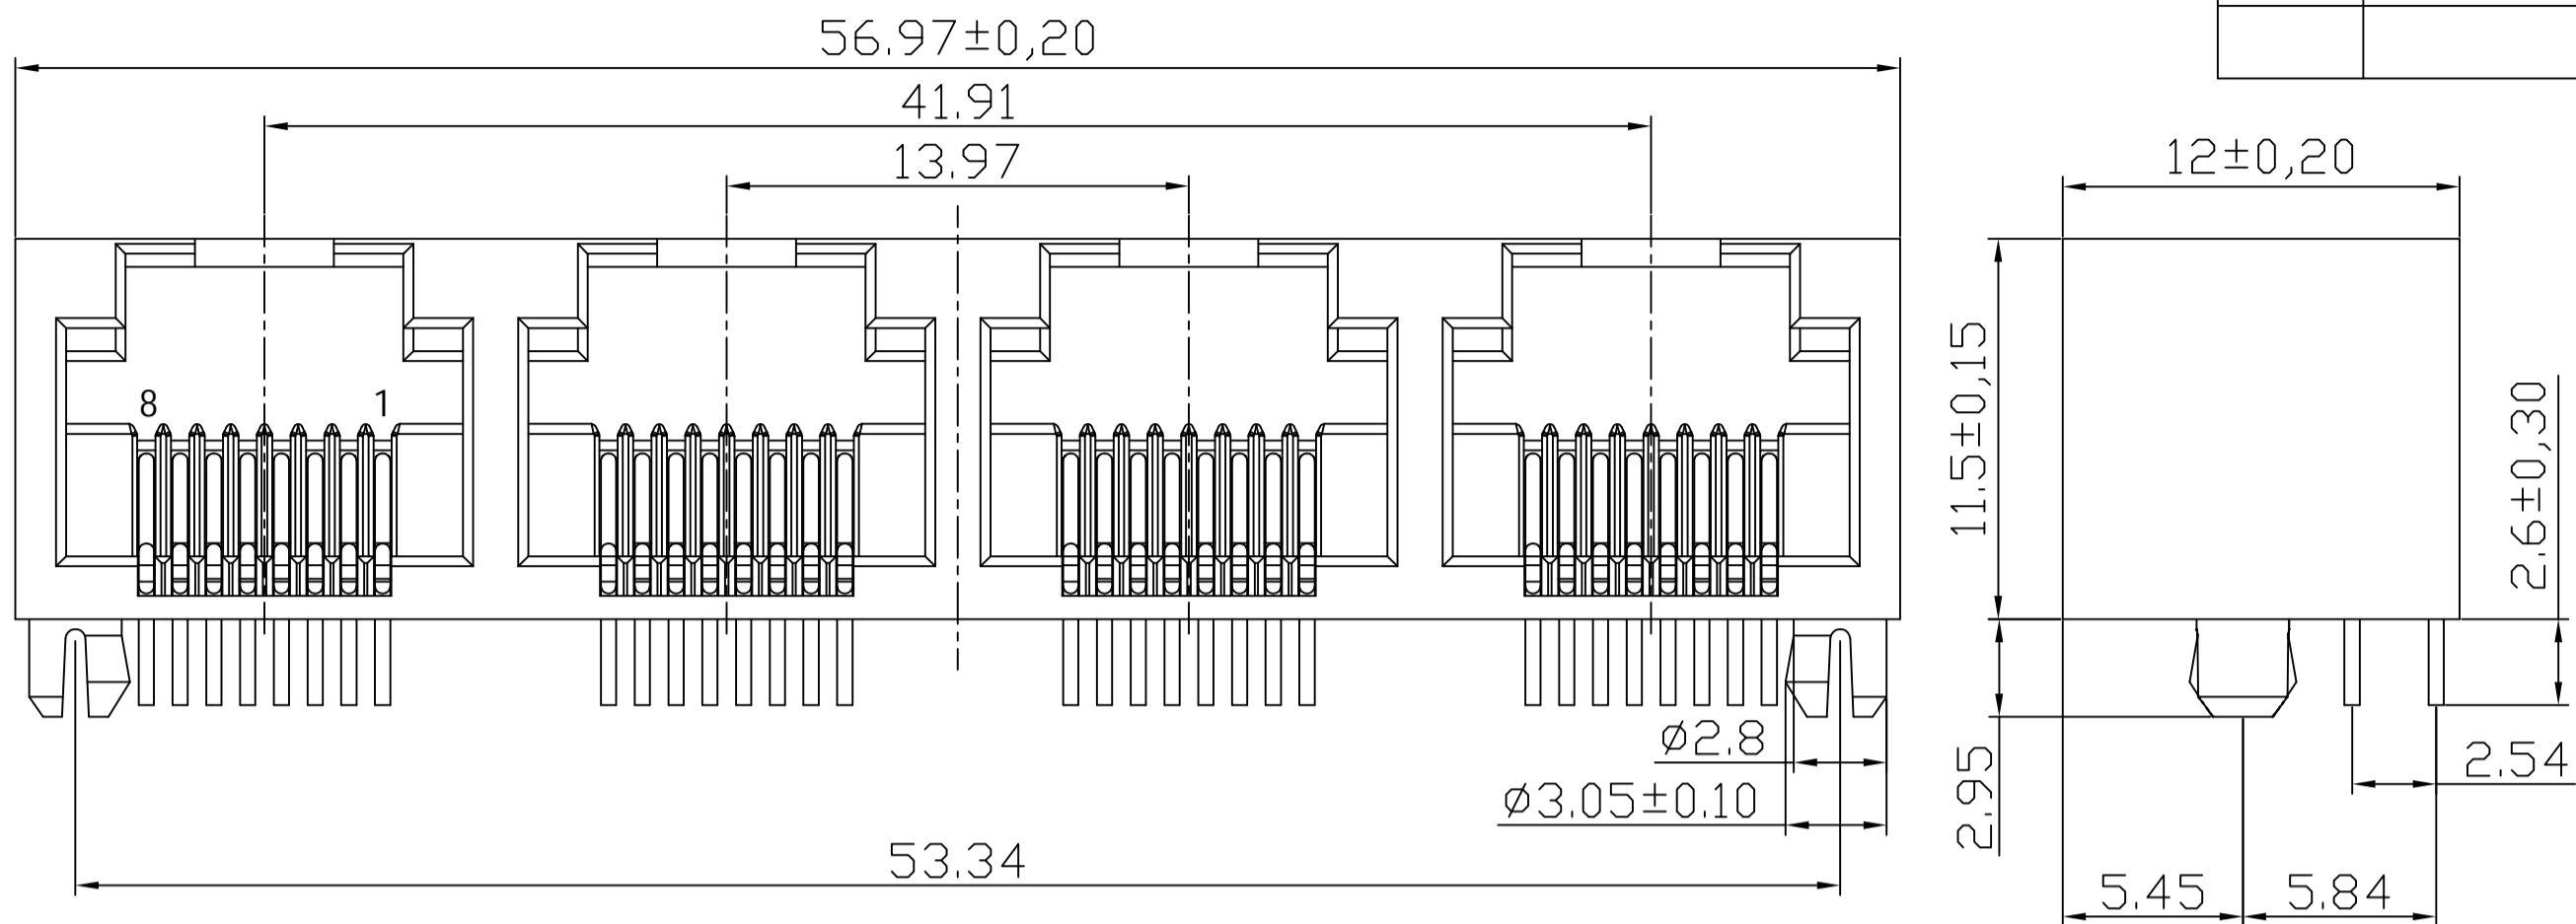


Mechanical :

REV.	ECN NO.	DESCRIPTION	DATE	APPD
B	REL		2024-06-10	

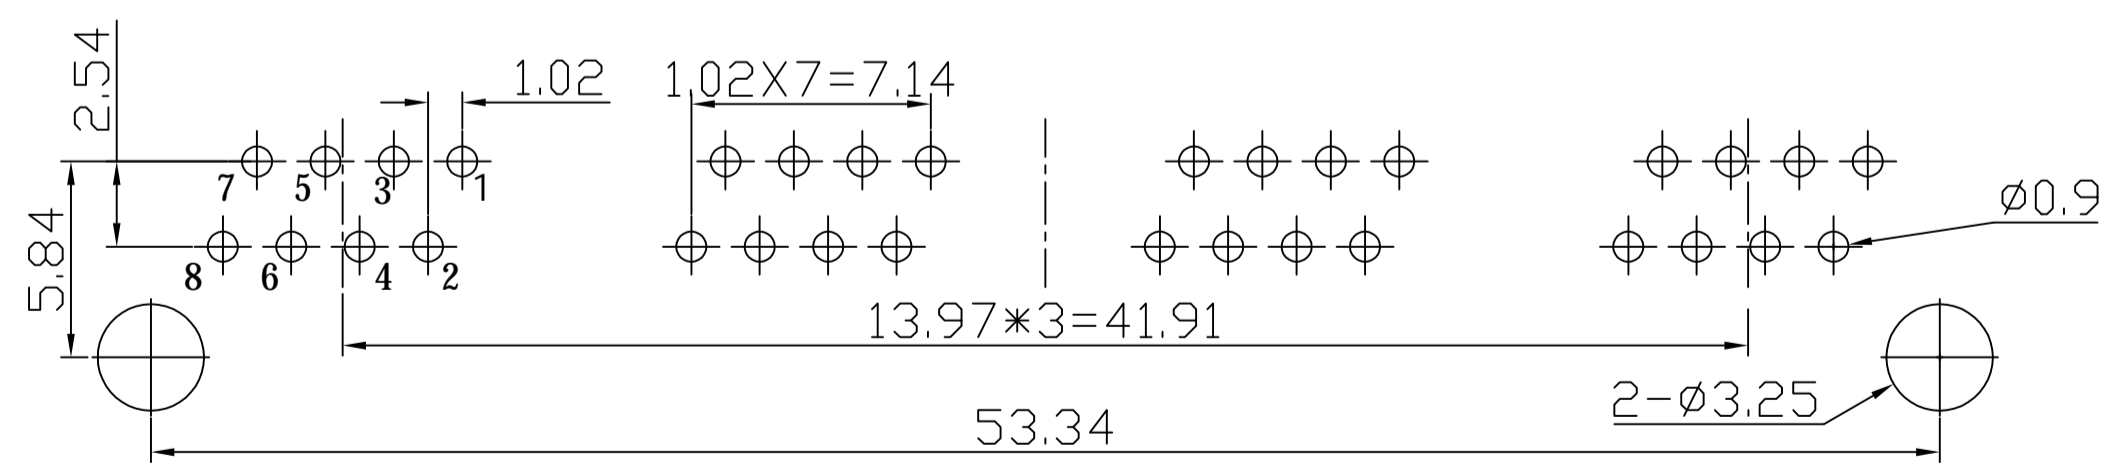

- NOTES:
- ELECTRICAL:
- VOLTAGE RATING: 125V AC.
 - CURRENT RATING: 1.5A.
 - CONTACT RESISTANCE: 50 mΩ MAX.
 - INSULATION RESISTANCE: 1000 MΩ MIN @ 500V DC.
 - DIELECTRIC STRENGTH: 1000V AC 50Hz 1MIN.
- MECHANICAL:
- HOUSING MATERIAL: PBT BLACK UL94V-0.
 - CONTACT MATERIAL: PHOSPHOR BRONZE (ROUND PIN Ø0.46mm)
 - CONTACT PLATING: GOLD FLASH OVER NICKEL.
 - OPERATING LIFE: 750 CYCLES MIN.
- ENVIRONMENTAL:
- STORAGE: -40°C ~ +85°C
 - OPERATION: -40°C ~ +85°C
 - WAVE SOLDER TIP TEMPERATURE AND TIME: 250°C, 5 SEC.
 - UL CERTIFICATION: FILE NUMBER E484635

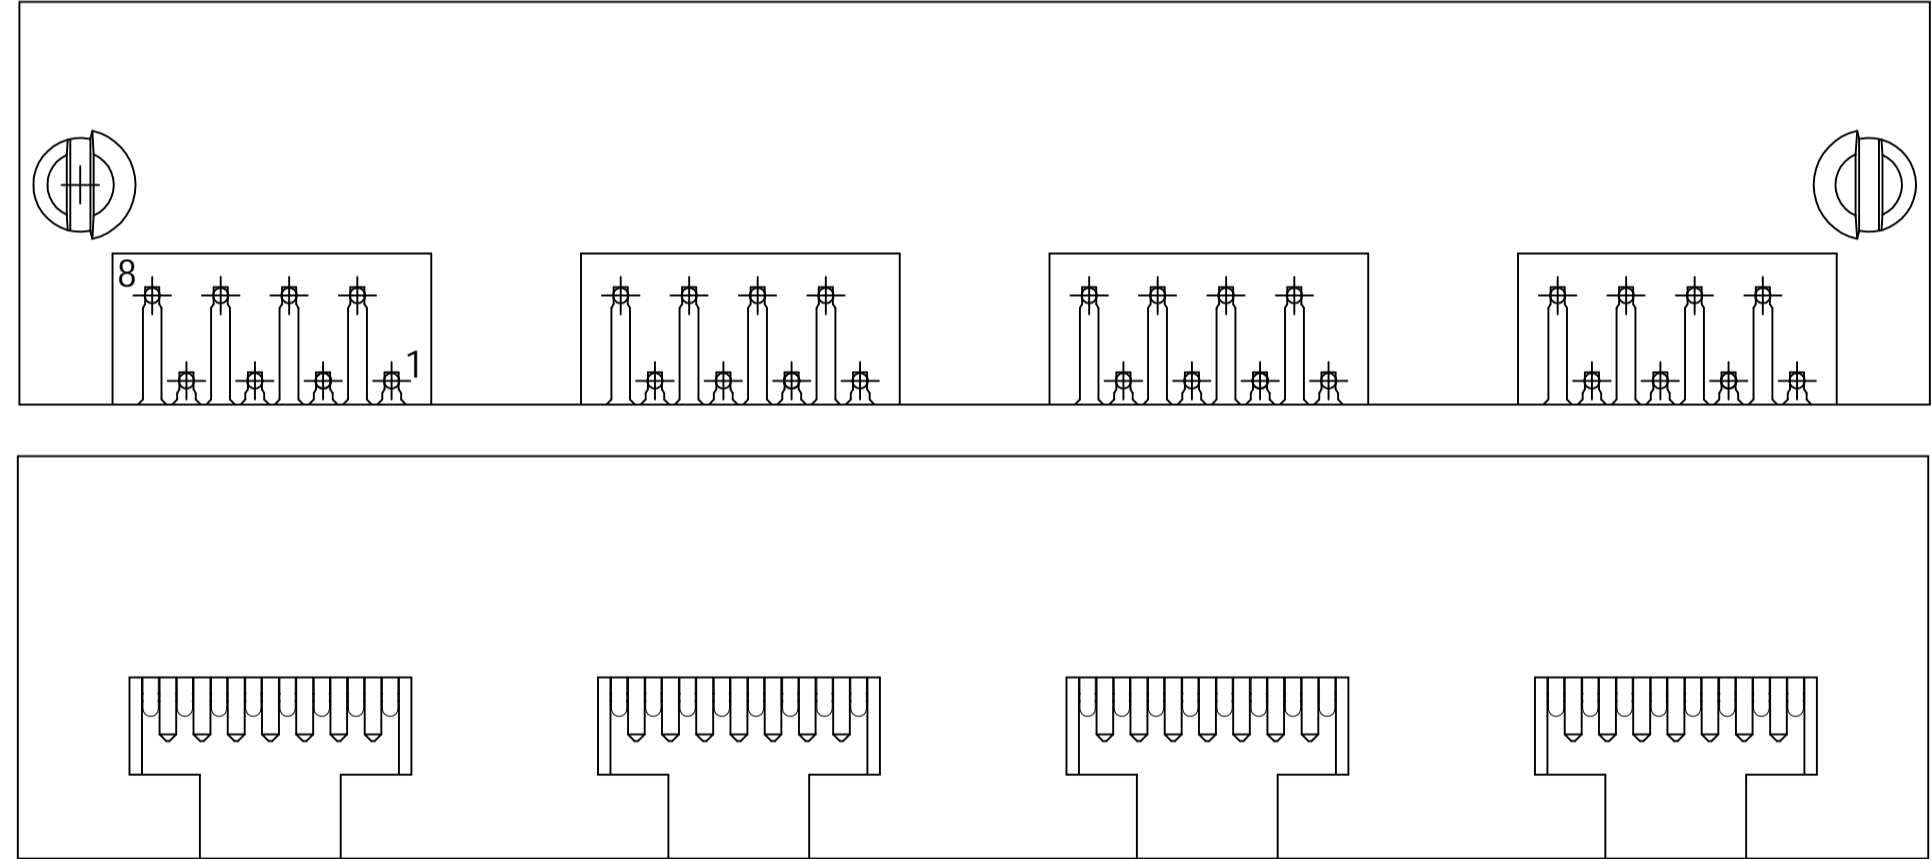

RECOMMENDED PCB LAYOUT(TOP VIEW)



X.X	±0.30	APPD: TOM	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X.XX	±0.25	CHKD: JAMES	TITLE:
X.XXX	±0.15	DR: JULY	RJ45 1X4 CONNECTOR WITHOUT SHIELD
ANGLES	±1°	UNIT: mm	PART NO.: LPJE504-ONNL
	SCALE: 2/1	SHEET: 1/1	REV: B
			DWG NO.: LP24061013