
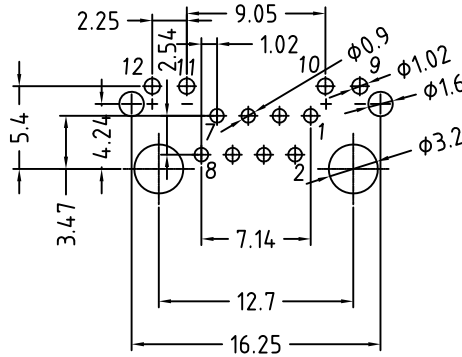

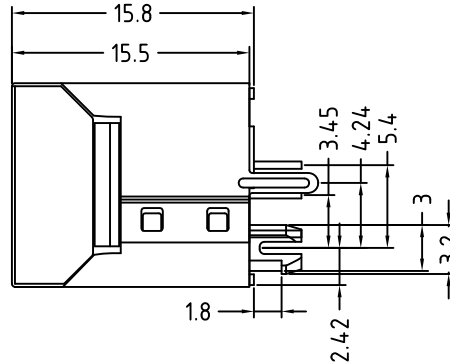


REV. 版本	ECN NO. 变更说明	DATE 日期

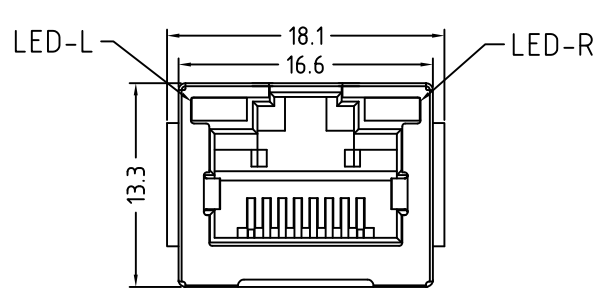

SUGGESTED PCB LAYOUT
(TOP VIEW)

NOTES

MATERIAL

1. HOUSING MATERIAL : PBT/PA46 UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD PLATING $\text{fu} \sim 50\mu$ OVER NICKEL.
4. SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL


1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
5. DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. PCB RETENTIONPRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. OPERATION : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

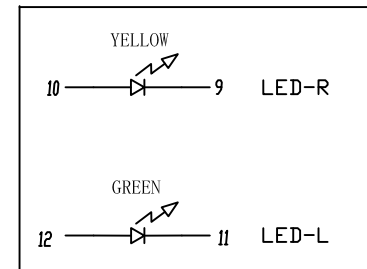

RoHS Compliant

连普国际科技有限公司 LINK-PP INT'L TECHNOLOGY CO., LIMITED					TOLERANCES 0~15 ± 0.15 15~30 ± 0.20 30~50 ± 0.25 50~ ± 0.30 ANGLES: $\pm 1^{\circ}$	MATERIAL:	Designed:	NAME: Single Port RJ45 Connector		
	A4	SCALE	UNIT	CUSTOMER:		FINISH:	Checked:	DWG NO:	LP15122501	REV.
	SIZE	1:1	mm			SHEET 1 OF 1	Approved:	PART NO:	LPJE651BHNL	00