




Mechanical:

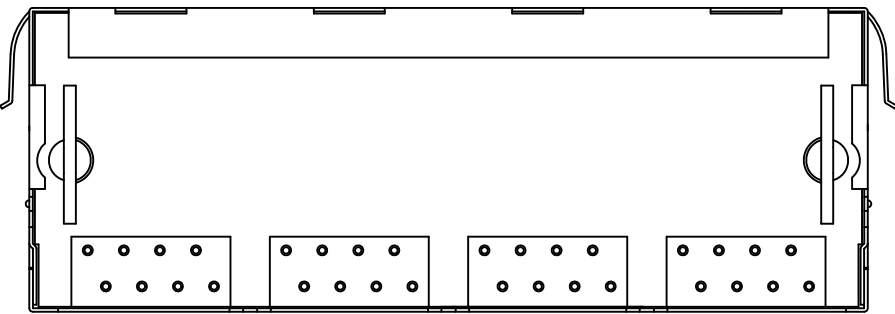

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		13/01/2010	

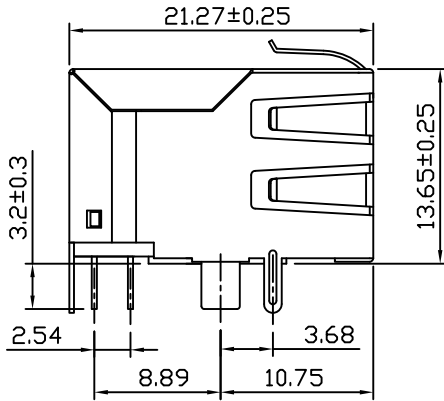

LPJEF123XCNL

Gold Plating	"X"
Gold Flash	0
1.5u"	1
3u"	2
6u"	3
15u"	4
30u"	5
50u"	6

NOTES:

Electrical:

- | | |
|--------------------------|----------------------------|
| 1. Voltage rating | : 125 VAC RMS |
| 2. Current Rating | : 1.5 AMP |
| 3. Contact resistance | : 50 mΩ Max |
| 4. Insulation resistance | : 500 MΩ Min @500V DC |
| 5. Dielectric strength | : 1000 VAC RMS 60Hz, 1MIN. |


MECHANICAL:

1. Housing & Insert Material : PBT UL94V-0.
2. Contact Material : Diameter 0.46mm Phosphor Bronze
Gold Plating Over Nickel.
3. Shield : 0.20-0.25mm Thickness Brass
With tin Plated
4. Operating Life : 750 Cycles Min.

ENVIRONMENTAL:

- | | |
|---------------------------|------------------------|
| 1.Storage | : -40℃ ~ +85℃ |
| 2.Operation | : -40℃ ~ +85℃. |
| 3.Wave solder temperature | : 265℃ 5 Sec MAX |
| 4.UL Certification | : File Number E484635. |



X:X	±0.30	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED		
X:XX	±0.25	CHKD:			
X:XXX	±0.05	DR: TOM	TITLE: RJ45 1×4 CONNECTOR,BEFORE PLASTIC POST 3.68 mm		
ANGLES ±1°		UNIT: mm	PART NO. : LPJEF123XCNL		
	SCALE: 2/1	SHEET: 1/1	REV: A	DWG NO. : LP10011308	