
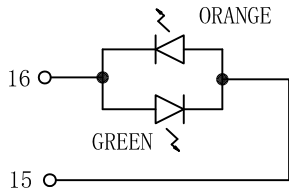


Schematic:


REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2012/06/12	

PCB CONNECTIONS

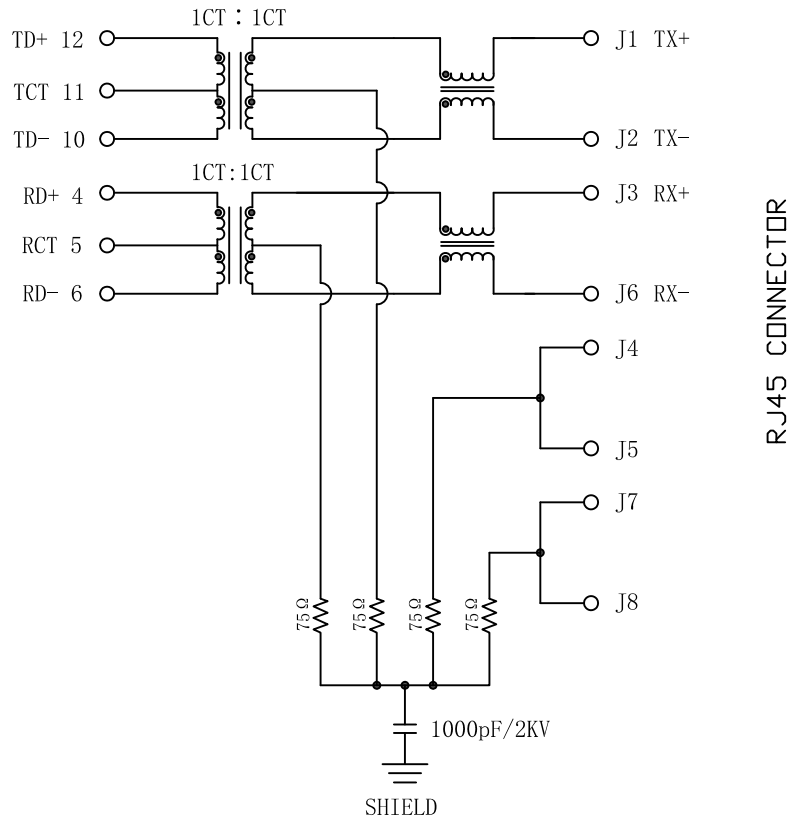

LEFT LED

LED POLARITY		COLOR
PIN 15	PIN 16	
-	+	GREEN
+	-	ORANGE



RIGHT LED




LED POLARITY		COLOR
PIN 13	PIN 14	
-	+	YELLOW

- Electrical Specification @25℃
- Turns Ratio:
TX=1CT : 1CT RX=1CT : 1CT
 - 0CL: 350uH Min @100KHz/100mVrms
8mA DC Bias (0℃~70℃)
 - Insertion Loss(dB Max):
0.1~1MHz:-1.1
1~65MHz:-0.5
65~100MHz:-0.8
100~125MHz:-1.2
 - Return Loss(dB Min @100 OHMS±15%):
0.5~40MHz:-18
50~100MHz:-12+20LOG(f/80MHz)
 - CM to CM Rej:
0.1~100MHz:-30dB Min
 - CM to DM Rej:
0.1~100MHz:-35dB Min
 - Hipot: 1500Vrms
 - Operating Temperature: -40℃~+85℃.




X:X	±0.20	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.10	CHKD:		
X:XXX	±0.05	DR: TOM	TITLE: RJ45 Connector With 10/100 Base-TX Integrated Magnetic	
ANGLES	±1°	UNIT: mm	PART NO. : LPJK7401A0NL	
	SCALE: 2/1	SHEET: 1/2	REV: A	DWG: LP12061211

Mechanical:

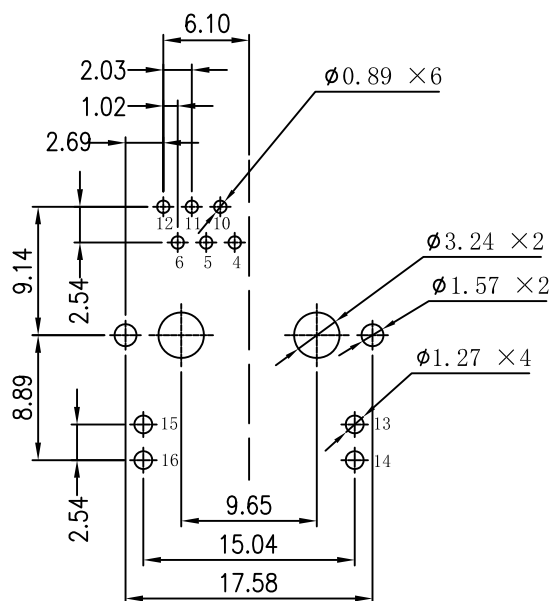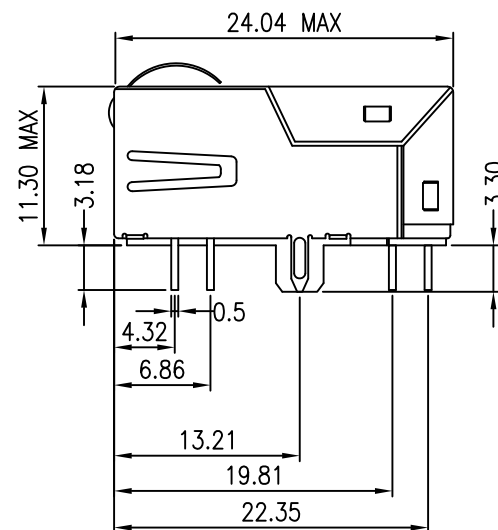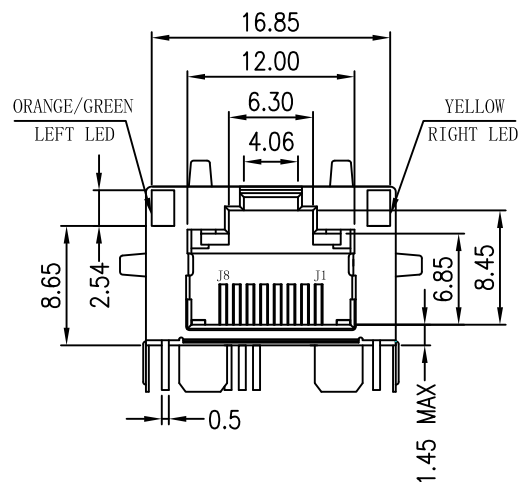

SUGGESTED PCB LAYOUT(TOP VIEW)

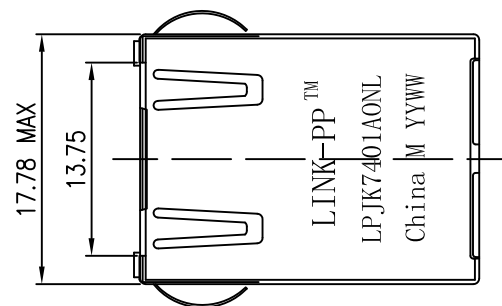

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2012/03/15	

NOTES:

1. Designed to support application, such as SOHO (ADSL modems), LAN-on-Motherboard (LOM), hub and Switches.
2. Meets IEEE 802.3 specification
3. Connector Materials:
Housing: Thermoplastic UL94V-0
Contact/Shield: Copper alloy
Shield plating: Nickel
Contact plating: Gold 6 micro-inches min. In contact area.
4. Wave peak temperature: 260°C, 5Sec.
5. UL Certification: File Number E484635.



X:X	± 0.20	APPD:	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	± 0.10	CHKD:		
X:XXX	± 0.05	DR: TOM	TITLE: RJ45 Connector With 100 Base-TX Integrated Magnetic	
ANGLES	$\pm 1^\circ$	UNIT: mm	PART NO.: LPJK7401A0NL	
		SCALE: 2/1	SHEET: 2/2	REV: A DWG: LP12061211