





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	George L. 03/01/13"		



NOTE:

MATERIAL  
 HOUSING: PBT  
 CONTACT: C2680  
 SHELL: SPCC

ELECTRIC  
 CONTACT RESISTANCE: 30 MILLIOHMS MAX  
 INSULATION RESISTANCE: 1000 MEGA OHMS MIN  
 DIELECTINIC VOLTAGE: 500V AC ONE SEC LEVEL  
 OPERATING TEMPERATURE: -55°C~105°C

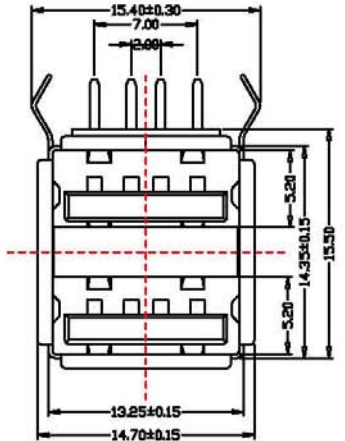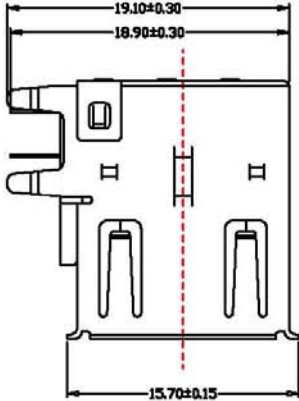

GENERAL TOLERANCE			
X.	±0.25	X.	±5°
X.X	±0.20	X.X°	±3°
X.XX	±0.15	X.XX°	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.			

PROJECTION		TITLE	USB AF 90° DIP 双层	
UNITS	mm			
SHEET SIZE	A4	SERIES	LPUSB2201	

LINK-PP INT'L TECHNOLOGY CO., LIMITED