
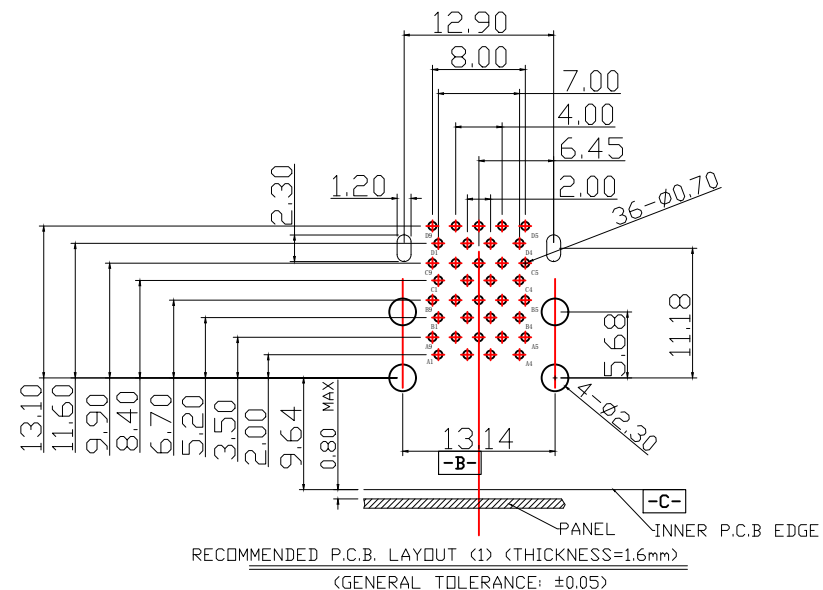


Mechanical:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2021-08-08	

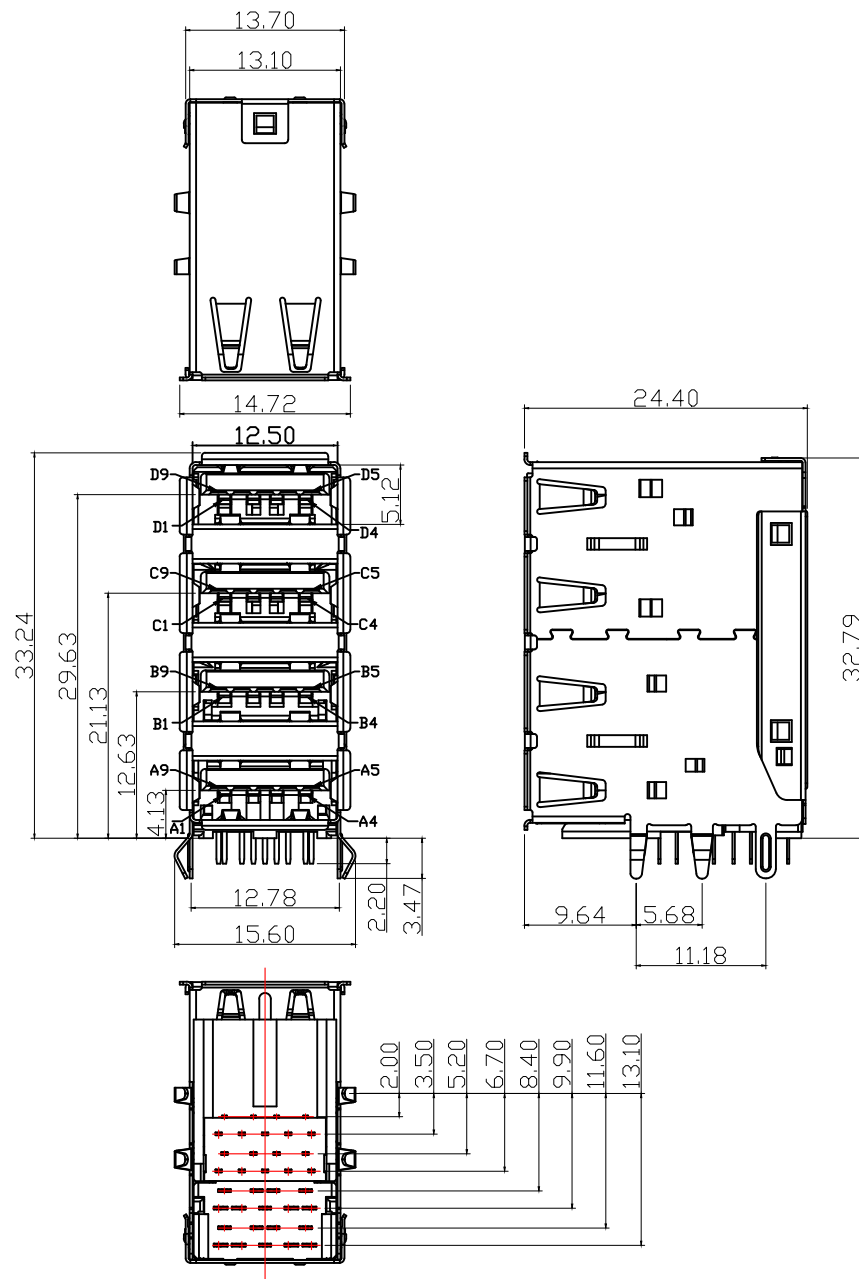

NOTES:

1. MATERIAL:

- 1.1 HOUSING : PA66, UL94V-0, COLOR : BLUE
- 1.2 3PORT HOUSING : PA66, UL94V-0, COLOR : BLUE
- 1.3 4PORT HOUSING : PA66, UL94V-0, COLOR : BLUE
- 1.4 COVER1 : PA66, UL94V-0, COLOR : BLUE
- 1.5 COVER2 : PA66, UL94V-0, COLOR : BLUE
- 1.6 CONTACTS 4PIN: PHOSPHOR BRONZE,
- 1.7 CONTACTS 5PIN: BRASS,
- 1.8 SHELL: SUS430.
- 1.9 BACK SHELL: SUS430.
- 1.10 MIDDLE BULLET:SK7

2. FINISH:


- 2.1 CONTACTS: GOLD FLASH PLATED ON CONTACT AREA,
80u" MIN. MATTE-TIN PLATED ON SOLDER TAIL,
50u" MIN. NICKEL UNDERPLATED OVERALL.
- 2.2 SHELL: 60u" MIN MATTE TIN PLATING ON SOLDER
TAILS OVER 30u" MIN NICKEL.
- 2.3 MIDDLE BULLET: 50u" MIN. NICKEL PLATED OVERALL.



X:X	±0.30	APPD:	TOM	LINK-PP INT'L TECHNOLOGY CO., LIMITED
X:XX	±0.25	CHKD:	JAMES	
X:XXX	±0.05	DR:	LEO	TITLE: 4XUSB 3.0 A F CONN
ANGLES	±1°	UNIT:	mm	PART NO.: LPUSB49106
	SCALE:	2/1	SHEET:	1/2
	REV:	A	DWG NO.:	LP21080811

Package:

REV.	ECN NO.	DESCRIPTION	DATE	APPD
A	REL		2021-08-08	

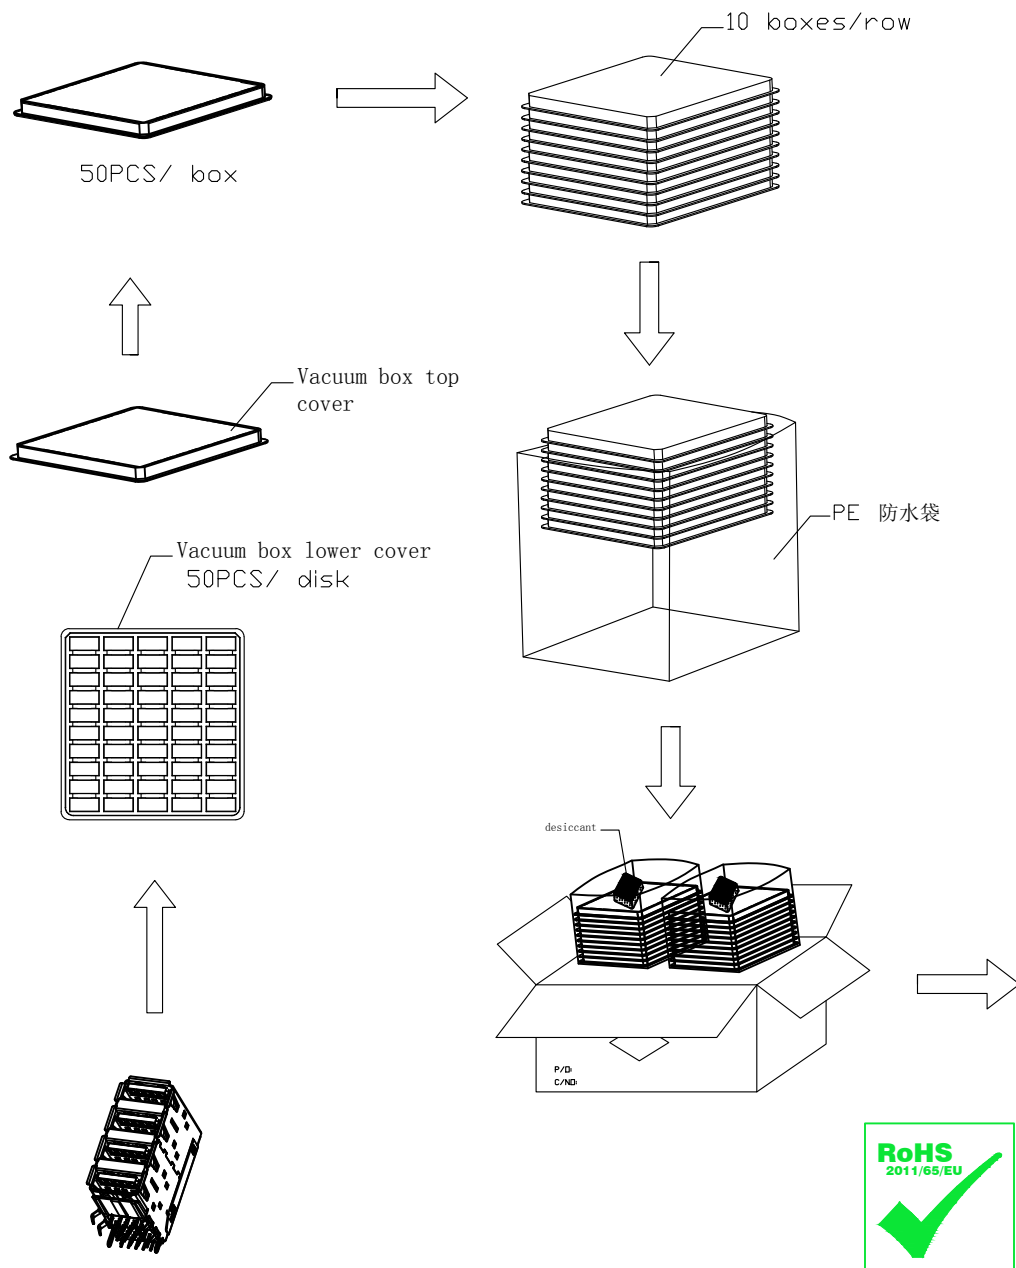

- ◆ Packaging unit: 50pcs/tray
- ◆ Outer carton unit: 1000pcs/box
- ◆ Gross weight:: 17KG/box
- ◆ Net weight per unit:16g
- ◆ CARTON SIZE: 565*273*285MM
- ◆ Vacuum box:270*255*27MM

X:X	±0.30	APPD: TOM	LINK-PP INT'L TECHNOLOGY CO., LIMITED	
X:XX	±0.25	CHKD: JAMES		
X:XXX	±0.05	DR: LEO	TITLE: 4XUSB 3.0 A F CONN	
ANGLES	±1°	UNIT: mm	PART NO.: LPUSB49106	
	SCALE: 2/1	SHEET: 2/2	REV: A	DWG NO.: LP21080811